

3V0-21.23 Dumps

VMware vSphere 8.x Advanced Design

<https://www.certleader.com/3V0-21.23-dumps.html>



NEW QUESTION 1

After adding a new vSphere ESXi host with identical hardware configuration to an existing vSphere cluster, which task would an administrator complete prior to checking the compliance with an existing host profile?

- A. Attach the host profile to the new host
- B. Duplicate the host profile
- C. Copy the host settings from the new host
- D. Import the host profile

Answer: A

Explanation:

The task that should be completed prior to checking the compliance with an existing host profile is to attach the host profile to the new host, which allows applying the configuration template of the reference host to the new host.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.hostprofiles.doc/GUID-0E5BF330-A76> <https://www.nakivo.com/blog/how-to-create-and-set-up-vmware-vsphere-host-profiles/>

NEW QUESTION 2

An administrator is tasked with adding two additional hosts into an existing production vSphere cluster to support the need for additional capacity.

The vSphere cluster currently has four identically configured ESXi hosts (esx01, esx02, esx03 and esx04) that utilize Intel Skylake-based CPUs. The two new hosts (esx05 and esx06) are configured identically in terms of memory and storage to the existing hosts: but utilize Intel Ice Lake-based CPUs.

The administrator must ensure that:

- Any virtual machine migrates to any of the six ESXi hosts running in the cluster.
- There is no virtual machine downtime during the process of adding the new hosts. Which step should the administrator take to meet these requirements?

- A. Create a new vSphere cluster with Enhanced vMotion Compatibility (EVC) enabled and move all hosts into A' the new cluster
- B. Create a new vSphere cluster and move only three hosts into the new cluster.
- C. Configure Enhanced vMotion Compatibility (EVC) mode on the existing cluster and add the two new hosts into the cluster.
- D. Create a new vSphere cluster with vSphere High Availability (HA) enabled and move all hosts into the new cluster

Answer: C

Explanation:

The step that the administrator should take to meet these requirements is to configure Enhanced vMotion Compatibility (EVC) mode on the existing cluster and add the two new hosts into the cluster. EVC mode allows migration of virtual machines between different generations of CPUs by masking unsupported processor features. EVC mode can be enabled on an existing cluster without affecting powered-on virtual machines. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vcenterhost.doc/GUID-9F444D9B-44A>

<https://blogs.vmware.com/vsphere/2019/06/enhanced-vmotion-compatibility-evc-explained.html>

NEW QUESTION 3

An administrator is looking to deploy a new VMware vCenter Instance. The current environment consists of 75 hosts and is expected to grow up to 100 hosts over the next three years.

Which deployment size should the administrator select?

- A. Medium
- B. Tiny
- C. Large
- D. Small

Answer: D

Explanation:

VMware: Small environment (up to 100 hosts or 1,000 virtual machines) Medium environment (up to 400 hosts or 4,000 virtual machine)

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.install.doc/GUID-88571D8A-46E1-464> The administrator should select the small deployment size for the new vCenter Server instance, which is suitable for an environment with up to 100 hosts or 1,000 virtual machines. The small deployment size has 4 vCPUs and 19 GB of memory, which can handle the current and expected growth of the environment. The other deployment sizes are either too large or too small for the environment. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.install.doc/GUID-88571D8A-46E1-464>

NEW QUESTION 4

An administrator has mapped three vSphere zones to three vSphere clusters.

Which two statements are true for this vSphere with Tanzu zonal Supervisor enablement? (Choose two.)

- A. One Supervisor will be created in a specific zone.
- B. One Supervisor will be created across all zones.
- C. Three Supervisors will be created in Linked Mode.
- D. Individual vSphere Namespaces will be placed into a specific zone.
- E. Individual vSphere Namespaces will be spread across all zones.

Answer: BE

Explanation:

For a vSphere with Tanzu zonal Supervisor enablement where three vSphere zones are mapped to three vSphere clusters, the following two statements are true:

B. One Supervisor will be created across all zones. In a three-zone deployment, all three vSphere clusters become one Supervisor.

E. Individual vSphere Namespaces will be spread across all zones. You can distribute the nodes of your

Tanzu Kubernetes Grid clusters across all three vSphere zones, thus providing HA for your Kubernetes workloads at a vSphere cluster level.

NEW QUESTION 5

An administrator notices a Fibre Channel adapter in an ESXi host has been experiencing inconsistent connectivity states. Which trigger can be used to quickly identify the issue and alert the administrator so that the issue can be resolved?

- A. Host Connection Lost
- B. Lost Network Path Redundancy
- C. Lost Network Connectivity
- D. Lost Storage Connectivity

Answer: D

Explanation:

<https://kb.vmware.com/s/article/2014553>

Book course: 6-23 Fibre Channel SAN Components Using SAN switches, you can set up path redundancy to address any path failures from host server to switch, or from storage array to switch. 6-25 Multipathing with Fibre Channel By default, ESXi hosts use only one path from a host to a given LUN at any one time. If the path actively being used by the ESXi host fails, the server selects another available path.

The trigger that can be used to quickly identify the issue and alert the administrator so that the issue can be resolved is:

Lost Storage Connectivity

This alert is triggered when an ESXi host loses connectivity to storage devices. In this case, it would alert the administrator to the inconsistent connectivity states of the Fibre Channel adapter12.

NEW QUESTION 6

An administrator needs to configure a content library solution based on the following information:

- A new corporate virtual machine (VM) template is created every month to include all of the latest patches.
- The new VM template should be downloaded from the primary data center site (London) to two secondary data center sites (Tokyo and New York) as soon as possible.
- There is limited disk space available at one of the secondary data center sites (Tokyo) due to an ongoing data center consolidation project.

Which four steps should the administrator take to configure the content library solution before adding a VM template? (Choose four.)

- A. Create a new published content library In each secondary site
- B. Configure the New York subscribed content library to download content immediately.
- C. Configure the Tokyo subscribed content library to download content immediately
- D. Configure the Tokyo subscribed content library to download content when needed
- E. Create a new published content library at the primary site
- F. Configure the New York subscribed content library to download content when needed.
- G. Create a new subscribed content library in each secondary site

Answer: BDEG

Explanation:

The administrator should take these four steps to configure the content library solution before adding a VM template:

- Create a new published content library at the primary site, which allows the administrator to share the VM template with other sites.
- Configure the New York subscribed content library to download content immediately, which ensures that the new VM template is downloaded from the primary site as soon as possible.
- Configure the Tokyo subscribed content library to download content when needed, which saves disk space at the secondary site by downloading only the metadata of the VM template until it is deployed.
- Create a new subscribed content library in each secondary site, which allows the administrator to subscribe to the published content library at the primary site and synchronize the VM template. References:

https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vm_admin.doc/GUID-E8E854D

NEW QUESTION 7

An administrator is configuring vSphere Lifecycle Manager to install patches to a vSphere cluster. The cluster runs workload virtual machines (VMs) that are incompatible with vSphere vMotion, and therefore cannot be live migrated between hosts during the installation of the patches.

Which configuration in vSphere Lifecycle Manager will allow the administrator to reduce the downtime associated with the patching operation without migrating the VMs?

- A. Enable Distributed Power Management (DPM) and set the VM power state to the suspend to disk option
- B. Enable Quick Boot and set the VM power state to the suspend to disk option
- C. Enable vSphere High Availability (HA) admission control and set the VM power state to the suspend to memory option
- D. Enable Quick Boot and set the VM power state to the suspend to memory option

Answer: D

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-lifecycle-manager/GUID-06A5D316-9452-4A5D-A> The administrator should enable Quick Boot and set the VM power state to the suspend to memory option, which will allow the administrator to reduce the downtime associated with the patching operation without migrating the VMs. Quick Boot is a feature that skips the hardware initialization phase during host reboot, which reduces the system boot time. Suspend to memory is an option that preserves the state of the VMs in the host memory and restores them from memory after the reboot, which minimizes the VM downtime. These two features work together to optimize the remediation process and speed up the patching operation. References: <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere-lifecycle-manager.doc/GUID-5AF3C6>

NEW QUESTION 8

An administrator is working with VMware Support and is asked to provide log bundles for the ESXi hosts in an environment. Which three options does the administrator have? (Choose three.)

- A. Generate a combined log bundle for all ESXi hosts using the vCenter Management Interface.
- B. Generate a separate log bundle for each ESXi host using the vSphere Host Client.
- C. Generate a combined log bundle for all ESXi hosts using the vSphere Client.

- D. Generate a separate log bundle for each ESXI host using the vSphere Client.
- E. Generate a separate log bundle for each ESXI host using the vCenter Management Interface.
- F. Generate a combined log bundle for all ESXi hosts using the vSphere Host Client.

Answer: BCD

Explanation:

Option B, C and D are correct because they are valid methods to generate log bundles for individual or multiple ESXi hosts using different interfaces. Option A and E are incorrect because they are not possible options to generate log bundles for all ESXi hosts using the vCenter Management Interface. Option F is incorrect because it is not possible to generate a combined log bundle for all ESXi hosts using the vSphere Host Client. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.troubleshooting.doc/GUID-9A94C3D1>

NEW QUESTION 9

An administrator needs to provide encryption for workloads within an existing vSphere cluster. The following requirements must be met:

- Workloads should be encrypted at rest.
- Encrypted workloads must automatically be encrypted during transit.
- Encryption should not require any specific hardware.

What should the administrator configure to meet these requirements?

- A. Encrypted vSphere vMotion
- B. Unified Extensible Firmware Interface (UEFI) Secure Boot
- C. Host Encryption
- D. VM Encryption

Answer: D

Explanation:

The feature that should be configured to provide encryption for workloads within an existing vSphere cluster without requiring any specific hardware is VM Encryption, which allows encrypting VMs at rest and during vMotion.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.security.doc/GUID-F8F105EC-A6EA>

NEW QUESTION 10

An administrator is performing maintenance activities and discovers that a Virtual Machine File System (VMFS) datastore has a lot more used capacity than expected. The datastore contains 10 virtual machines (VMs) and, when the administrator reviews the contents of the associated datastore, discovers that five virtual machines have a snapshot file (-delta.vmdk files) that has not been modified in over 12 months. The administrator checks the Snapshot Manager within the vSphere Client and confirms that there are no snapshots visible.

Which task should the administrator complete on the virtual machines to free up datastore space?

- A. Consolidate the snapshots for each VM.
- B. Inflate the disk files for each VM.
- C. Delete all snapshots for each VM.
- D. Storage vMotion each VM to another datastore.

Answer: A

Explanation:

Consolidating snapshots for each VM will merge any snapshot files that are not associated with a snapshot in Snapshot Manager into the base disk file and free up datastore space.

References:

https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vm_admin.doc/GUID-53F65726-A23B

The presence of redundant delta disks can adversely affect the virtual machine performance. You can combine such disks without violating a data dependency. After consolidation, redundant disks are removed, which improves the virtual machine performance and saves storage space.

NEW QUESTION 10

A vSphere cluster hosts a three-tier application. The cluster has 50% resources available. If a host in the cluster fails, the database server must be online before the application server, and the application server must be online before the Web server.

Which feature can be used to meet these requirements?

- A. Predictive DRS
- B. vSphere HA Orchestrated Restart
- C. vSphere HA Restart Priority
- D. Proactive HA

Answer: B

Explanation:

<https://www.vladan.fr/what-is-vmware-orchestrated-restart/>

NEW QUESTION 11

An administrator has configured Storage I/O Control (SIOC) on a Virtual Machine File System (VMFS) datastore.

- The datastore supports 30,000 IOPS
- Storage I/O Control has been set to manual
- Storage I/O Control is triggered when latency hits 30 ms
- The datastore contains 3 virtual machines (VMs)
- A gold tier VM
- A silver tier VM
- A bronze tier VM

Assuming the datastore latency does not exceed 29ms, what is the maximum number of IOPS the bronze tier VM is entitled to?

A. A.-30,000B.20,000C.10.000D.5,000

Answer: A

Explanation:

The bronze tier VM is entitled to 30,000 IOPS, which is the maximum number of IOPS that the datastore supports. Storage I/O Control (SIOC) does not limit the IOPS of any VM unless the datastore latency exceeds the threshold, which is 30 ms in this case. Therefore, as long as the datastore latency is below 29 ms, the bronze tier VM can use up to 30,000 IOPS. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.resmgmt.doc/GUID-7686FEC3-1FAC>

NEW QUESTION 12

What is the role of vSphere Distributed Services Engine?

- A. Provide a live shadow Instance of a virtual machine (VM) that mirror, the primary VM to prevent data loss and downtime during outages
- B. Implement Quality of Service (QoS) on network traffic within a vSphere Distributed Switch
- C. Provide hardware accelerated data processing to boost infrastructure performance
- D. Redistribute virtual machines across vSphere cluster host affinity rules following host failures or during maintenance operations

Answer: C

Explanation:

The role of vSphere Distributed Services Engine is to provide hardware accelerated data processing to boost infrastructure performance by offloading network services from the CPU to the DPU.

References: <https://core.vmware.com/resource/whats-new-vsphere-8>

NEW QUESTION 15

An administrator decides to restore VMware vCenter from a file-based backup following a failed upgrade. Which interface should the administrator use to complete the restore?

- A. Direct Console User Interface (DCUI)
- B. vCenter Management Interface (VAMI)
- C. vSphere Client
- D. vCenter GUI Installer

Answer: D

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-vcenter-installation/GUID-F02AF073-7CFD-45B2>- You can use the vCenter Server appliance GUI installer to restore a vCenter Server to an ESXi host or a vCenter Server instance. The restore procedure has two stages. The first stage deploys a new vCenter Server appliance. The second stage populates the newly deployed vCenter Server appliance with the data stored in the file-based backup.

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-vcenter-installation/GUID-F02AF073-7CFD-45B2>

NEW QUESTION 20

An administrator manually configures a reference ESXi host that meets company security standards for vSphere environments. The administrator now needs to apply all of the security standards to every identically configured host across multiple vSphere clusters within a single VMware vCenter instance. Which four steps would the administrator complete to meet this requirement? (Choose four.)

- A. Extract the host profile from the reference host
- B. Export the host profile from vCenter.
- C. Import host customization on the reference host.
- D. Attach the host profile to each cluster that requires the secure configuration.
- E. Check the compliance of each host against the host profile.
- F. Reset host customization on the reference host.
- G. Remediate all non-compliant hosts.

Answer: ADEG

Explanation:

To apply the security standards from a reference host to other hosts across multiple clusters, the administrator needs to extract a host profile from the reference host, which captures its configuration settings; attach the host profile to each cluster that requires the same configuration; check the compliance of each host against the host profile, which compares their settings; and remediate all non-compliant hosts, which applies the configuration settings from the host profile.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.security.doc/GUID-F8F105EC-A6EA>

NEW QUESTION 24

An administrator is tasked with deploying a new on-premises software-defined data center (SDDC) that will contain a total of eight VMware vCenter instances. The following requirements must be met:

- All vCenter instances should be visible in a single vSphere Client session.
- All vCenter inventory should be searchable from a single vSphere Client session.
- Any administrator must be able to complete operations on any vCenter instance using a single set of credentials.

What should the administrator configure to meet these requirements?

- A. Two Enhanced Linked Mode groups consisting of four vCenter instances each in a Single Sign-On domain.
- B. A single Hybrid Linked Mode group consisting of four vCenter instances each in a Single Sign-On domain.
- C. A single Enhanced Linked Mode group consisting of eight vCenter instances in one Single Sign-On domain.
- D. A single Hybrid Linked Mode group consisting of eight vCenter instances in one Single Sign-On domain.

Answer: B

Explanation:

To meet the requirements of viewing and searching all vCenter instances and inventory with a single vSphere Client session and a single set of credentials, the administrator needs to configure a single Enhanced Linked Mode group consisting of eight vCenter instances in one Single Sign-On domain.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vcenterhost.doc/GUID-39A8C7F4-8D8>

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-vcenter-installation/GUID-4394EA1C-0800-4A6A->

NEW QUESTION 25

An administrator wants to allow a DevOps engineer the ability to delete Tanzu Kubernetes Grid (TKG) cluster objects in a vSphere Namespace.

Which role would provide the minimum required permissions to perform this operation?

- A. Administrator
- B. Can View
- C. Owner
- D. Can Edit

Answer: D

Explanation:

The Can Edit role would provide the minimum required permissions to delete Tanzu Kubernetes Grid (TKG) cluster objects in a vSphere Namespace, as it allows creating, updating, and deleting objects within a namespace.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/vmware-vsphere-with-tanzu/GUID-C2E9B5C1-D6F1-4E9B>

NEW QUESTION 30

An administrator is tasked with implementing a backup solution capable of backing up the Supervisor cluster, vSphere Pods, and persistent volumes.

Which two solutions must be used to meet this requirement? (Choose two.)

- A. VMware vCenter
- B. Standalone Velero and Restic
- C. NSX-T Manager
- D. vSphere Host Client
- E. Velero Plugin for vSphere

Answer: BE

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/vmware-vsphere-with-tanzu/GUID-9816E07A-466C-451D-A>

NEW QUESTION 33

Which two tasks can be completed using vSphere LifeCycle Manager? (Choose two.)

- A. Manage the firmware lifecycle of ESXi hosts that are part of a managed cluster with a single image.
- B. Check that the ESXi hosts are compliant with the recommended baseline and update the hosts
- C. Upgrade VMware vCenter from version 7 to 8.
- D. Check the hardware compatibility of the hosts in a cluster against the VMware Compatibility Guide (VCG) using baselines.
- E. Manage the firmware lifecycle of ESXi hosts are part of a managed cluster using baselines

Answer: BE

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere-lifecycle-manager.doc/GUID-774C362>

NEW QUESTION 34

An administrator needs better performance and near-zero CPU utilization from the ESXi hosts for networking functions and processing. The administrator creates a new vSphere Distributed Switch and enables network offloads compatibility.

Which solution would help achieve this goal?

- A. vSphere Distributed Services Engine
- B. Data Processing Units (DPUs)
- C. vSphere Network I/O Control
- D. Universal Passthrough version 2

Answer: B

Explanation:

The solution that would help achieve better performance and near-zero CPU utilization from the ESXi hosts for networking functions and processing is Data Processing Units (DPUs), which are specialized processors that offload network services from the CPU and provide hardware acceleration.

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-networking/GUID-41AB1101-D943-490A-BF1A-E>

NEW QUESTION 35

An administrator enables Secure Boot on an ESXi host. On booting the ESXi host, the following error message appears:

Fatal error: 39 (Secure Boot Failed)

- A. The kernel has been tampered with.

- B. The Trusted Platform Module chip has failed.
C. The administrator attempted to boot with a bootloader that is unsigned or has been tampered with.
D. A package (VIB or driver) has been tampered with.

Answer: A

Explanation:

The fatal error “Secure Boot Failed” may indicate that either the kernel or a package (VIB or driver) has been tampered with, which violates the Secure Boot integrity check.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.security.doc/GUID-F8F105EC-A6EA>

NEW QUESTION 36

An administrator creates a new corporate virtual machine (VM) template every month to include all of the latest patches. The administrator needs to ensure that the new VM template is synchronized from the primary data center site (London) to two secondary data center sites (Tokyo and New York). The administrator is aware that datastore space is limited within the secondary data center sites. The administrator needs to ensure that the VM template is available in the secondary sites the first time a new virtual machine is requested.

Which four steps should the administrator take to meet these requirements? (Choose four.)

- A. Create a new published content library at the primary site.
B. Add the virtual machine template to the subscribed content library.
C. Create a new published content library in each secondary site.
D. Create a new subscribed content library in each secondary site.
E. Configure the subscribed content library to download content when needed.
F. Configure each subscribed content library to download content immediately.
G. Add the virtual machine template to the published content library.

Answer: ADEG

Explanation:

To meet the requirements of synchronizing and protecting images and templates with limited datastore space, the administrator needs to create a new published content library at the primary site, which makes it available for subscription by other vCenter Server instances; create a new subscribed content library in each secondary site, which allows accessing content from a published content library; configure the subscribed content library to download content when needed, which saves datastore space by only downloading content on demand; and add the virtual machine template to the published content library, which makes it available for other hosts to use.

References:

https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vm_admin.doc/GUID-FBEED81C-F9D

NEW QUESTION 37

An administrator is tasked with looking into the disaster recovery (DR) options for a software-defined data center (SDDC).

The following requirements must be met:

- All virtual machines (VMs) must be protected to a secondary site.
- The source VMs must remain online until the failover.
- When failing over to the secondary site, application downtime is allowed
- The DR failover must be managed from the vSphere Client.
- Costs must remain as low as possible.

How can the administrator accomplish this task?

- A. Configure VMware Cloud Disaster Recovery (VCDR) and combine it with array-based storage replication
B. Configure VMware a Site Recovery Manager and combine it with vSphere Replication.
C. Configure a subscribed content library on the secondary site.
D. Configure VMware Site Recovery Manager and combine it with array-based storage replication.

Answer: B

Explanation:

<https://blogs.vmware.com/virtualblocks/2017/11/29/vsr-technicaloverview/>

NEW QUESTION 42

An administrator is preparing for a deployment of a new vCenter Server Appliance. The following information has been provided to complete the deployment:

- ESXi Host name (FQDN): esx01.corp.local . ESXi IP Address: 172.20.10.200
- vCenter Server Name (FQDN): vcса01.corp.local
- vCenter Server IP Address: 172.20.10.100
- NTP Server: 172.20.10.20
- DNS Server: 172.20.10.1
- Deployment Size: Tiny
- Storage Size: Default

Which two actions must the administrator complete before starting the installation of the vCenter Server Appliance? (Choose two.)

- A. Create a DNS CNAME record for the vCenter Server (vcса01.corp.local)
B. Create a DNS CNAME record for the ESXi Host server (esx01.corp.local)
C. Create a reverse DNS A record for the vCenter Server (vcса01).
D. Create a reverse DNS A record for the ESXi Host server (esx01)
E. Create a forward DNS A record for the vCenter Server (vcса01).

Answer: CE

Explanation:

The administrator must create a forward DNS A record for the vCenter Server (vcса01), which maps the FQDN of the vCenter Server to its IP address. The administrator must also create a reverse DNS A record for the ESXi Host server (esx01), which maps the IP address of the ESXi Host to its FQDN. These DNS

records are required for name resolution and certificate validation during the deployment of the vCenter Server Appliance. References:
<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.install.doc/GUID-88571D8A-46E1-464>
<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-vcenter-upgrade/GUID-752FCA83-1A9B-499E-9C6> If you plan to use an FQDN for the appliance system name, you must verify that the FQDN is resolvable by a DNS server, by adding forward and reverse DNS A records.

NEW QUESTION 47

To keep virtual machines (VMs) up and running at all times in a vSphere cluster, an administrator would like VMs to be migrated automatically when the host hardware health status becomes degraded.
Which cluster feature can be used to meet this requirement?

- A. Predictive DRS
- B. Proactive HA
- C. vSphere HA Orchestrated Restart
- D. vSphere Fault Tolerance

Answer: B

Explanation:

Proactive HA is a cluster feature that can be used to migrate VMs automatically when the host hardware health status becomes degraded, before a failure occurs.
References:
<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.avail.doc/GUID-C3FFBF62-D6BF-4A>

NEW QUESTION 51

When configuring vCenter High Availability (HA), which two statements are true regarding the active, passive, and witness nodes? (Choose two.)

- A. Network latency must be less than 10 milliseconds.
- B. They must have a supported Wide Area Network (WAN).
- C. They must have a minimum of a 10 Gbps network adapter
- D. They must have a minimum of a 1 Gbps network adapter.
- E. Network latency must be more than 10 milliseconds.

Answer: AD

Explanation:

When configuring vCenter High Availability (HA), two of the requirements for the active, passive, and witness nodes are that network latency must be less than 10 milliseconds, which ensures reliable communication between them; and they must have a minimum of a 1 Gbps network adapter, which provides sufficient bandwidth for data replication.
References:
<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.avail.doc/GUID-F01B2F12-C5BB-4C5>

NEW QUESTION 53

An administrator is completing the configuration of a new vSphere cluster and has enabled vSphere High Availability (HA) and vSphere Distributed Resource Scheduler (DRS).
After adding the ESXi hosts to the cluster, which networking information will the administrator be prompted to provide when using the Cluster Quickstart workflow?

- A. vMotion networking
- B. Management networking
- C. vSAN networking
- D. Virtual machine networking

Answer: A

Explanation:

<https://core.vmware.com/resource/cluster-quickstart#section1>

NEW QUESTION 55

What are two use cases for VMware vSphere+? (Choose two.)

- A. Enhance on-premises workloads by managing them through the VMware Cloud Console
- B. Allow live migration between on-premises and VMware Cloud
- C. Increase the performance of the native vCenter vMotion capability
- D. Allow the creation of affinity and anti-affinity rules to be used during failover events
- E. Simplify vCenter lifecycle management through cloud-enabled automation

Answer: AE

Explanation:

<https://www.vmware.com/products/vsphere/vsphere-plus.html> <https://blogs.vmware.com/vsphere/2022/06/vmware-vsphereplus-introducing-the-multi-cloud-workload-platform>

NEW QUESTION 60

An administrator needs to create affinity rules for the following vSphere cluster setup:

- The cluster contains two virtual machines (VMs) named app01 and app02.
- The cluster contains six hosts named esx11 through esx16.
- The app01 and app02 VMs run software that is licensed to run only on esx11, esx12, or esx13.
- vSphere Distributed Resource Scheduler (DRS) is configured

Which set of steps must the administrator perform to ensure that the licensing requirements are met for app01 and app02?

- A. * 1. Add all the hosts to a host group.* 2. Create a VM-VM anti-affinity rule for app01 and app02
B. 1. Add the esx11 - esx13 hosts to a host group* 2. Create a VM-VM affinity rule for app01 and app02
C. * 1 Add the VMs to a VM group and the esx11 - esx13 hosts to a host group.* 2 Create a VM-Host required rule between the VM group and the host group.
D. * 1. Add the VMs to a VM group and the esx11 - esx13 hosts to a host group.* 2. Create a VM-Host preferential rule between the VM group and the host group

Answer: C

Explanation:

Add the VMs to a VM group and the esx11 - esx13 hosts to a host group, which allows the administrator to group together virtual machines or hosts that share common characteristics or requirements.

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.resmgmt.doc/GUID-0591F865-91B5-4>

NEW QUESTION 61

Which feature would allow for the non-disruptive migration of a virtual machine between two clusters in a single VMware vCenter instance?

- A. vSphere vMotion
B. Cross vCenter Migration
C. vSphere Storage vMotion
D. vSphere Fault Tolerance

Answer: A

Explanation:

vSphere vMotion allows for the non-disruptive migration of a virtual machine between two clusters in a single vCenter instance, as long as there is shared storage and network connectivity between the clusters.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vcenterhost.doc/GUID-3B41119A-127>

vMotion is used to move the VM to a different cluster within the same vCenter. This only works if both clusters share the same storage. If they don't you also need to perform a Storage vMotion. Cross vCenter Migration is only used to migrate to a different vCenter.

NEW QUESTION 65

An administrator is planning to upgrade a VMware vCenter instance to version 8. It is currently integrated with the following solutions:

- * VMware Aria Automation
- * VMware Cloud Director

Which tool can the administrator use to run Interoperability reports before the upgrade process?

- A. sphere Update Manager
B. VMware Aria Suite Lifecycle
C. vCenter Server Update Planner
D. vSphere Lifecycle Manager

Answer: C

Explanation:

The tool that can be used to run interoperability reports before upgrading a vCenter Server instance is vCenter Server Update Planner, which allows checking compatibility with other VMware products.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.upgrade.doc/GUID-C3FFBF62-D6BF>

NEW QUESTION 70

An administrator is tasked with migrating a single virtual machine (VM) from an existing VMware vCenter to a secure environment where corporate security policy requires that all VMs be encrypted. The secure environment consists of a dedicated vCenter instance with a 4-node vSphere cluster and already contains a number of encrypted VMs.

Which two steps must the administrator take to ensure the migration is a success? (Choose two.)

- A. Ensure that the source and destination vCenter instances share the same Key Management Server(KMS).
B. Ensure that Encrypted vMotion Is turned off for the VM.
C. Ensure that the VM is encrypted before attempting the migration.
D. Ensure that the VM is powered off before attempting the migration.
E. Ensure that the source and destination vCenter Servers have a different Key Management Server (KMS).

Answer: AC

Explanation:

To ensure a successful migration of an encrypted VM to a secure environment, the administrator needs to ensure that the source and destination vCenter instances share the same Key Management Server (KMS), which provides encryption keys for both environments; and ensure that the VM is encrypted before attempting the migration, which allows preserving its encryption status during vMotion.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.security.doc/GUID-F8F105EC-A6EA-> <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.security.doc/GUID-C3FFBF62-D6BF>

NEW QUESTION 71

What is the minimum network throughput in Gb/s for vSAN using the Express Storage Architecture (ESA)?

- A. 50
B. 25
C. 1
D. 10

Answer: D

Explanation:

<https://core.vmware.com/resource/vmware-vsan-design-guide#:~:text=Summary%20of%20Network%20Design>

NEW QUESTION 73

After a number of outages within a production VMware software-defined data center, an administrator is tasked with identifying a solution to meet the following requirements:

- Reduce the risk of outages by proactively identifying issues with the environment and resolving them.
- Reduce the complexity of uploading log bundles when raising support tickets.

Which solution should the administrator recommend to meet these requirements?

- A. VMware Aria Operations for Logs
- B. VMware Skyline Advisor Pro
- C. VMware Skyline Health
- D. VMware Aria Operations

Answer: B

Explanation:

Skyline Advisor Pro is a self-service web application that enables you to receive proactive intelligence with new insights, accelerated analysis, and simplified design, within a web browser. To activate Skyline Advisor Pro, upgrade your Skyline Collector to Skyline Collector 3.0 or later versions.

The solution that should be recommended to reduce the risk of outages by proactively identifying and resolving issues with the environment and reducing the complexity of uploading log bundles is VMware Skyline Health, which provides automated support and proactive recommendations for vSphere.

NEW QUESTION 77

An administrator wants to use tag-based placement rules on their virtual machine disks using VMware vCenter.

Which option would allow the administrator to achieve this?

- A. Storage Policy Based Management
- B. Storage I/O Control
- C. vSphere Storage APIs for Storage Awareness (VASA)
- D. vSphere Distributed Resource Scheduler (DRS)

Answer: A

Explanation:

<https://vnote42.net/2020/01/15/vcenter-tag-based-vm-placement/>

NEW QUESTION 80

Which four elements can a vSphere Lifecycle Manager image contain? (Choose four.)

- A. ESXi base image
- B. ESXi configuration
- C. Vendor agents
- D. Vendor add-ons
- E. BIOS updates
- F. Firmware and drivers add-on
- G. Independent components

Answer: ADFG

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-lifecycle-manager/GUID-9A20C2DA-F45F-4C9B-9> A vSphere Lifecycle Manager image can consist of the following four elements:

ESXi base image

The base image contains an image of VMware ESXi Server and additional components, such as drivers and adapters that are necessary to boot a server. The base image is the only mandatory element in a vSphere Lifecycle Manager image. All other elements are optional.

Vendor add-on

The vendor add-on is a collection of software components that OEMs create and distribute. The vendor add-on can contain drivers, patches, and solutions.

Firmware and drivers add-on

The firmware and drivers add-on is a special type of vendor add-on designed to assist in the firmware update process. The firmware and drivers add-on contains firmware for a specific server type and corresponding drivers. To add a firmware and drivers add-on to your image, you must install the hardware support manager plug-in provided by the hardware vendor for the hosts in the respective cluster.

Independent components

The component is the smallest discrete unit in an image. The independent components that you add to an image contain third-party software, for example drivers or adapters.

NEW QUESTION 84

An administrator is tasked with configuring certificates for a VMware software-defined data center (SDDC) based on the following requirements:

- All certificates should use certificates trusted by the Enterprise Certificate Authority (CA).
- The solution should minimize the ongoing management overhead of replacing certificates.

Which three actions should the administrator take to ensure that the solution meets corporate policy? (Choose three.)

- A. Replace the VMware Certificate Authority (VMCA) certificate with a self-signed certificate generated from the
- B. Replace the machine SSL certificates with custom certificates generated from the Enterprise CA.
- C. Replace the machine SSL certificates with trusted certificates generated from the VMware Certificate Authority (VMCA).
- D. Replace the VMware Certificate Authority (VMCA) certificate with a custom certificate generated from the Enterprise CA.
- E. Replace the solution user certificates with custom certificates generated from the Enterprise CA.

F. Replace the solution user certificates with trusted certificates generated from the VMware Certificate Authority (VMCA).

Answer: BDE

Explanation:

Option B, D and E are correct because they allow the administrator to replace the machine SSL certificates, the VMware Certificate Authority (VMCA) certificate and the solution user certificates with custom certificates generated from the Enterprise CA, which will ensure that all certificates are trusted by the Enterprise CA and minimize the ongoing management overhead of replacing certificates. Option A is incorrect because replacing the VMCA certificate with a self-signed certificate generated from the VMCA will not ensure that the certificate is trusted by the Enterprise CA. Option C is incorrect because replacing the machine SSL certificates with trusted certificates generated from the VMCA will not ensure that the certificates are trusted by the Enterprise CA. Option F is incorrect because replacing the solution user certificates with trusted certificates generated from the VMCA will not ensure that the certificates are trusted by the Enterprise CA.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.security.doc/GUID-A2A4371A-B888>

NEW QUESTION 85

A combination of which two components of the software-defined data center (SDDC) are responsible for the initial abstraction of CPU, memory, disk, and network resources and their subsequent management? (Choose two.)

- A. VMware ESXi
- B. VMware vCenter Cloud Gateway
- C. VMware Ana Suite Lifecycle
- D. VMware vCenter
- E. VMware Ana Operations

Answer: AD

Explanation:

VMware ESXi and VMware vCenter are the two components of the software-defined data center (SDDC) that are responsible for the initial abstraction of CPU, memory, disk, and network resources and their subsequent management¹. VMware ESXi is the virtualization platform where you create and run virtual machines and virtual appliances². VMware vCenter is the service through which you manage multiple hosts connected in a network and pool host resources². These two components are part of the SDDC architecture that enables a fully automated, zero-downtime infrastructure for any application, and any hardware, now and in the future³.

NEW QUESTION 87

The vCenter inventory contains a virtual machine (VM) template called Linux-01. The administrator wants to install a software patch into Linux-01 while allowing users to continue to access Linux-01 to deploy VMs. Which series of steps should the administrator take to accomplish this task?

- A. * 1. Verify that Linux-01 is in a content library* 2. Clone Linux-01* 3. Convert the clone to a VM* 4. Install the software patch.
- B. * 1. Convert Linux-01 to a VM * 2 Install the software patch* 3 Convert the VM back to a VM template * 4 Add Linux-01 to the content library.
- C. * 1. Verify that Linux-01 is in a content library* 2. Checkout Linux-01* 3. Install the software patch * 4.Check in Linux-01
- D. * 1. Clone Linux-01.* 2. Convert the clone to a VM* 3. Install the software patch.* 4. Convert the VM back to a template.

Answer: C

Explanation:

The administrator should clone Linux-01, which creates a copy of the virtual machine template. The administrator should then convert the clone to a VM, which allows the administrator to power on and modify the virtual machine. The administrator should then install the software patch on the VM, which updates the application. The administrator should then convert the VM back to a template, which preserves the changes made to the VM and allows users to deploy VMs from it. References:

https://docs.vmware.com/en/VMware-vSphere/8.0/com.vmware.vsphere.vm_admin.doc/GUID-E8E854DD-AA

NEW QUESTION 92

An administrator receives reports from the application team of poor performance of a virtual machine (VM). The administrator reviews the virtual machine and discovers that it has 20 snapshots that are over 12 months old.

What could the administrator do to improve the VM's performance?

- A. Inflate the base disk to make space for future snapshots.
- B. Revert to the latest snapshot.
- C. Consolidate all of the snapshots into the base VM.
- D. Identify and delete the largest delta .vmdk file.

Answer: C

Explanation:

<https://4sysops.com/archives/performance-impact-of-snapshots-in-vmware-vsphere-7/#:~:text=As%20you%20k>

NEW QUESTION 93

If a distributed switch uses the "Route based on physical NIC load" load balancing algorithm, what does the mean send or receive utilization of an uplink need to exceed for the flow of traffic to move to the second uplink?

- A. 75 percent of the capacity over a 30 second period
- B. 60 percent of the capacity over a 30 second period
- C. 60 percent of the capacity over a 40 second period
- D. 75 percent of the capacity over a 40 second period

Answer: A

Explanation:

The distributed switch calculates uplinks for virtual machines by taking their port ID and the number of uplinks in the NIC team. The distributed switch tests the uplinks every 30 seconds, and if their load exceeds 75 percent of usage, the port ID of the virtual machine with the highest I/O is moved to a different uplink.
<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-networking/GUID-959E1CFE-2AE4-4A67-B4D4-2>

NEW QUESTION 98

An administrator is attempting to configure Storage I/O Control (SIOC) on five datastores within a vSphere environment. The administrator is being asked to determine why SIOC configuration completed successfully on only four of the datastores. What are two possible reasons why the configuration was not successful? (Choose two.)

- A. The datastore contains Raw Device Mappings (RDMs).
- B. SAS disks are used for the datastore.
- C. The datastore has multiple extents.
- D. The datastore is using iSCSI.
- E. The administrator is using NFS storage.

Answer: AC

Explanation:

SIOC configuration may fail if the datastore contains RDMs or has multiple extents, as these are not supported by SIOC.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.storage.doc/GUID-FB3F5C5C-D3F6-4>

Storage I/O Control is supported on Fibre Channel-connected, iSCSI-connected, and NFS-connected storage. Raw Device Mapping (RDM) is not supported. Storage I/O Control does not support datastores with multiple extents.

NEW QUESTION 101

An administrator is preparing to perform an update to vSphere clusters that are running vSAN. The administrator wants to ensure that the following requirements are met as part of the update:

- All hosts in the cluster are updated with the same software.
- The firmware versions on the hosts are updated
- The new software versions are checked for compliance against the vSAN Hardware Compatibility List. Which three steps should the administrator take to meet these requirements? (Choose three.)

- A. Configure vSphere Lifecycle Manager with an image for the cluster.
- B. Register the vendor hardware management system as a vCenter Server extension.
- C. Download the firmware updates from the VMware website
- D. Download the firmware updates from the vendor website.
- E. Run a hardware compatibility check using vSphere Lifecycle Manager
- F. Configure vSphere Lifecycle Manager with a baseline for the cluster.

Answer: ABE

Explanation:

The administrator should take these three steps to perform an update to vSphere clusters that are running vSAN:

- Configure vSphere Lifecycle Manager with an image for the cluster, which allows the administrator to specify the desired ESXi version and firmware for the hosts in the cluster.
- Register the vendor hardware management system as a vCenter Server extension, which allows the administrator to update the firmware on the hosts using vSphere Lifecycle Manager. The vendor hardware management system can also provide the firmware updates to vSphere Lifecycle Manager, so there is no need to download them from the vendor website separately.
- Run a hardware compatibility check using vSphere Lifecycle Manager, which verifies that the new software and firmware versions are compatible with the vSAN Hardware Compatibility List.

NEW QUESTION 106

An administrator is deploying a new all flash vSAN cluster based on the vSAN Original Storage Architecture (OSA). What is the minimum supported network throughput in Gb/s for each host?

- A. 50
- B. 10
- C. 25
- D. 1

Answer: B

Explanation:

The minimum supported network throughput in Gb/s for each host in an all flash vSAN cluster based on the vSAN Original Storage Architecture (OSA) is 10.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vsan-planning.doc/GUID-FCEA0CDD>

vSAN Express Storage Architecture (ESA) are only supported with 25Gbps and higher connection speeds.

ESA ReadyNodes configured for vSAN ESA will be configured with 25/50/100Gbps NICs. vSAN OSA

all-flash configurations are only supported with a 10Gb or higher connections. One reason for this is that the improved performance with an all-flash configuration may consume more network bandwidth between the hosts to gain higher throughput. <https://core.vmware.com/resource/vmware-vsan-design-guide#sec6815-sub3>

NEW QUESTION 109

Which three vSphere features are still supported for Windows-based virtual machines when enabling vSphere's -virtualization-based security feature? (Choose three.)

- A. vSphere vMotion
- B. PCI passthrough
- C. vSphere High Availability (HA) D, vSphere Fault Tolerance

- D. vSphere Distributed Resources Scheduler (DRS)
E. Hot Add of CPU or memory

Answer: ACE

Explanation:

Option A, C and E are correct because they indicate that vSphere features such as vMotion, High Availability (HA) and Distributed Resource Scheduler (DRS) are still supported for Windows-based virtual machines when enabling vSphere's virtualization-based security feature, which provides enhanced protection for guest operating systems and applications against various attacks. Option B is incorrect because PCI passthrough is not supported for Windows-based virtual machines when enabling vSphere's virtualization-based security feature, as this feature requires direct access to physical devices that cannot be shared or protected by hypervisor mechanisms. Option D is incorrect because Fault Tolerance is not supported for Windows-based virtual machines when enabling vSphere's virtualization-based security feature, as this feature requires identical execution states for primary and secondary virtual machines that cannot be guaranteed by hypervisor mechanisms. Option F is incorrect because Hot Add of CPU or memory is not supported for Windows-based virtual machines when enabling vSphere's virtualization-based security feature, as this feature requires dynamic changes to virtual hardware configuration that cannot be handled by hypervisor mechanisms. References: <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.security.doc/GUID-A2A4371A-B888>

NEW QUESTION 114

During the staging of a patch on a vCenter Server Appliance, an error was encountered and the process stopped. An administrator resolved the root cause and is ready to continue with the staging of the patch.

From the vCenter Management Interface, which action should the administrator take to continue the process from the point at which the error occurred?

- A. Use the Stage and Install option to resume the staging.
B. Use the Resume option to resume the staging.
C. Use the Unstage option to restart the staging.
D. Use the Stage Only option to restart the staging.

Answer: B

Explanation:

docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.upgrade.doc/GUID-FF533442-66F0-4797-976

NEW QUESTION 117

An administrator is tasked with configuring vSphere Trust Authority. The administrator has completed the following steps:

- Set up the workstation
- Enabled the Trust Authority Administrator
- Enabled the Trust Authority State
- Collected information about the ESXi hosts and vCenter to be trusted Which step does the administrator need to complete next?

- A. Import the Trusted Host information to the Trust Authority Cluster
B. Import the Trusted Cluster information to the Trusted Hosts
C. Create the Key Provider on the Trusted Cluster
D. Import the Trusted Host information to the Trusted Cluster

Answer: A

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.security.doc/images/GUID-D205B3C1> <https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-security/GUID-39D8AB34-AD45-4B0A-8FB0-7A1>

NEW QUESTION 120

An administrator is responsible for performing maintenance tasks on a vSphere cluster. The cluster has the following configuration:

. Identically configured vSphere ESXi hosts (esx01, esx02, esx03 and esx04)

- All workloads are deployed into a single VMFS datastore provided by the external storage array
- vSphere High Availability (HA) has not been enabled
- vSphere Distributed Resource Scheduler (DRS) has not been enabled Currently, a critical production application workload (VM1) is running on esx01.

Given this scenario, which two actions are required to ensure VM1 continues to run when esx01 is placed into maintenance mode? (Choose two.)

- A. Fully automated DRS must be enabled on the cluster so that VM1 will be automatically migrated to another host within the cluster when esx01 is placed into maintenance mode.
B. VM1 must be manually shut down and cold migrated to another host within the cluster using vSphere vMotion before esx01 is placed into maintenance mode.
C. vSphere HA must be enabled on the cluster so that VM1 will be automatically migrated to another host within the cluster when esx01 is placed into maintenance mode.
D. VM1 must be manually live migrated to another host within the cluster using vSphere vMotion before esx01 is placed into maintenance mode.
E. VM1 must be manually migrated to another host within the cluster using vSphere Storage vMotion before esx01 is placed into maintenance mode.

Answer: AD

Explanation:

Two actions that are required to ensure VM1 continues to run when esx01 is placed into maintenance mode are enabling fully automated DRS on the cluster, which allows balancing the workload across hosts and migrating VMs without user intervention; and manually live migrating VM1 to another host within the cluster using vSphere vMotion, which allows moving a running VM without downtime.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.resmgmt.doc/GUID-F01B2F12-C5BB-> <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vcenterhost.doc/GUID-F01B2F12-C5B>

NEW QUESTION 122

Refer to the exhibit.

THEN

Trigger the alarm and ^{*} select severity

Send email notifications ☒ Repeat ⁱ

Subject ^{*} Alarm {Alarm name} on Virtual Machine : {Target Name} is {New status}

Email to ^{*} vmware-admin@email.com

Send SNMP traps ☒ Repeat ⁱ

Run script ☐

After updating a predefined alarm on VMware vCenter, an administrator enables email notifications as shown in the attached alarm; however, notifications are NOT being sent.

Where must the mail server settings be configured by the administrator to resolve this issue?

- A. In the ESXi host system config
- B. In the alarm rule definitions
- C. In the vCenter settings in the vSphere Client
- D. in the vCenter Management Interface

Answer: C

Explanation:

Option C is correct because it allows the administrator to configure the mail server settings in the vCenter settings in the vSphere Client, which are required for sending email notifications for alarms. Option A is incorrect because it configures the mail server settings on an ESXi host system, which are not used for sending email notifications for alarms. Option B is incorrect because it configures the alarm rule definitions, which are already enabled in the exhibit. Option D is incorrect because it configures the vCenter Management Interface, which is not used for sending email notifications for alarms. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.monitoring.doc/GUID-A2A4371A-B88>

NEW QUESTION 126

What are two uses cases for VMware Tools? (Choose two.)

- A. Time synchronization with an NTP server
- B. Direct deployment of the Aria Automation Config minion
- C. Share folders between ESXi hosts and guest OS file systems
- D. Ability to shut down a virtual machine remotely
- E. Support for unsupported network device drivers

Answer: CD

Explanation:


<https://www.stevenbright.com/2022/03/deploy-salt-minions-automatically-using-vmware-tools/>

Two use cases for VMware Tools are direct deployment of the Aria Automation Config minion and ability to shut down a virtual machine remotely. Direct deployment of the Aria Automation Config minion is a feature that allows the administrator to deploy a configuration management agent to a virtual machine using VMware Tools. This feature enables automation and orchestration of virtual machine configuration tasks. Ability to shut down a virtual machine remotely is a feature that allows the administrator to gracefully power off a virtual machine from the vSphere Client or other VMware products. This feature requires VMware Tools to be installed and running on the guest operating system. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vmwaretools.doc/GUID-28C39A00-74>

NEW QUESTION 129

Refer to the exhibit.

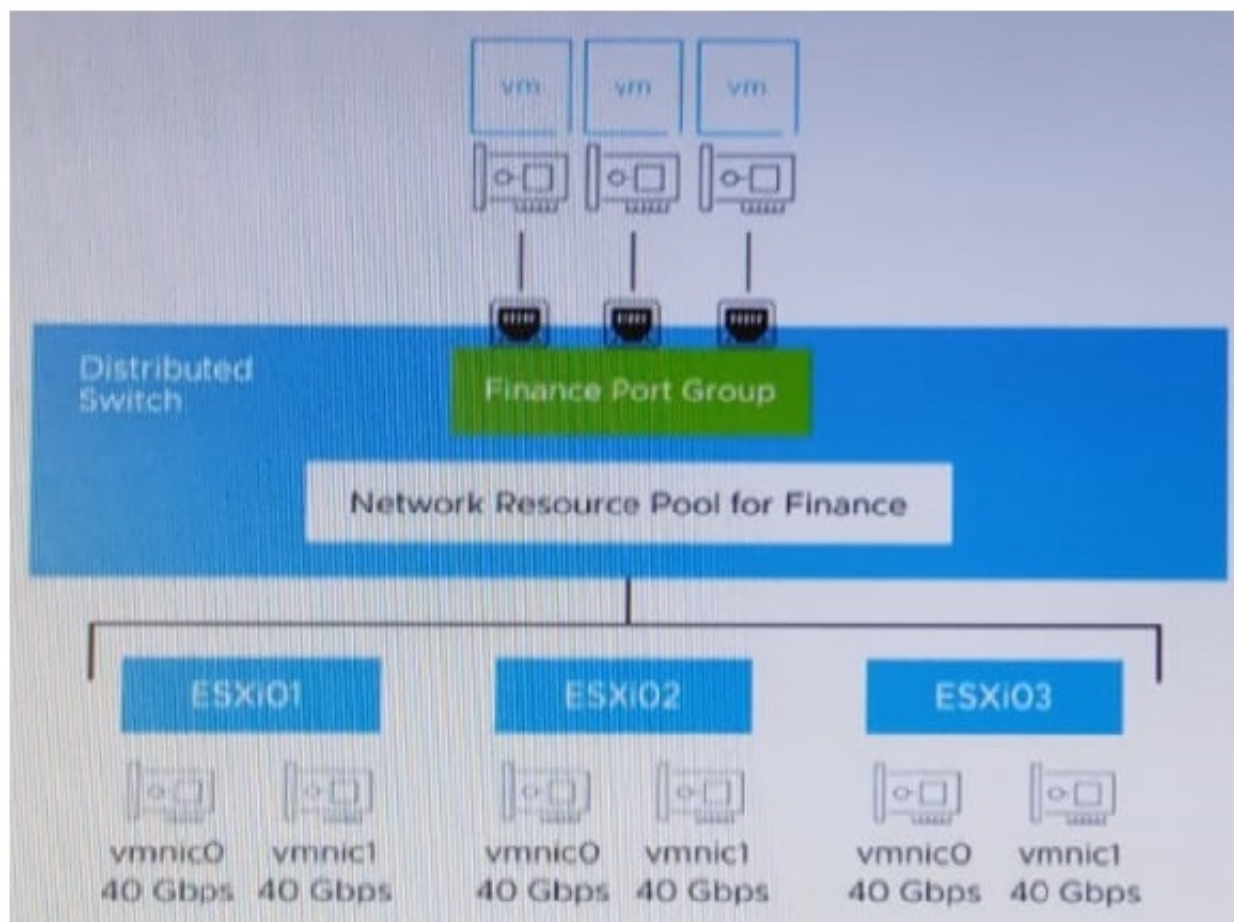

An administrator set up the following configuration:

- The distributed switch has three ESXi hosts, and each host has two 40 Gbps NICs.
- The amount of bandwidth reserved for virtual machine (VM) traffic is 6 Gbps.

The administrator wants to guarantee that VMs in the Finance distributed port group can access 50 percent of the available reserved bandwidth for VM traffic. k Given this scenario, what should the size (in Gbps) of the Finance network resource pool be?

- A. 18
- B. 80
- C. 36
- D. 120

Answer: A

Explanation:

The size of the Finance network resource pool should be 50 percent of the reserved bandwidth for VM traffic, which is 6 Gbps x 3 hosts = 18 Gbps.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.networking.doc/GUID-9F1D4E96-339>

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-networking/GUID-29A96AB2-AEBF-420E-BDD6>

NEW QUESTION 134

An administrator wants to create virtual machine (VM) templates and store them in a content library. The administrator would like to use the content library to manage different versions of these templates so that reverting to an earlier version is an option.

How should the administrator create these templates?

- A. Select a VM in the vCenter inventory.Clone the VM to the content library as a VM template type.
- B. Select a VM template in the vCenter inventor
- C. Clone the template to the content library.
- D. Export a VM in the vCenter inventory to an OVF templat
- E. Import the OVF template into the content library.
- F. Convert a VM to a template in the vCenter inventory.Clone the template to the content library.

Answer: A

Explanation:

Option A is correct because it allows the administrator to clone a VM to the content library as a VM template type, which can be used to create and manage different versions of these templates in the content library. Option B is incorrect because it requires the administrator to convert a VM to a template in the vCenter inventory first, which is an extra step. Option C is incorrect because it requires the administrator to export a VM to an OVF template and import it into the content library, which are extra steps. Option D is incorrect because it requires the administrator to convert a VM to a template in the vCenter inventory and clone it to the content library, which are extra steps. References:

https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vm_admin.doc/GUID-9F9E3F8C-0E2

NEW QUESTION 137

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your 3V0-21.23 Exam with Our Prep Materials Via below:

<https://www.certleader.com/3V0-21.23-dumps.html>