



**Cisco**

## **Exam Questions 300-620**

Implementing Cisco Application Centric Infrastructure (DCACI)

#### NEW QUESTION 1

An engineer is creating a configuration import policy that must terminate if the imported configuration is incompatible with the existing system. Which import mode achieves this result?

- A. merge
- B. atomic
- C. best effort
- D. replace

**Answer: B**

**Explanation:**

Reference: [https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/4-x/aci-fundamentals/Cisco-ACI-Fundamentals-401/Cisco-ACI-Fundamentals-401\\_chapter\\_01011.html](https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/4-x/aci-fundamentals/Cisco-ACI-Fundamentals-401/Cisco-ACI-Fundamentals-401_chapter_01011.html)

#### NEW QUESTION 2

Which components must be configured for the BGP Route Reflector policy to take effect?

- A. spine fabric interface overrides and profiles
- B. access policies and profiles
- C. pod policy groups and profiles
- D. leaf fabric interface overrides and profiles

**Answer: A**

**Explanation:**

Reference: [https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/4-x/L3-configuration/Cisco-APIC-Layer-3-Networking-Configuration-Guide-401/Cisco-APIC-Layer-3-Networking-Configuration-Guide-401\\_chapter\\_01.html](https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/4-x/L3-configuration/Cisco-APIC-Layer-3-Networking-Configuration-Guide-401/Cisco-APIC-Layer-3-Networking-Configuration-Guide-401_chapter_01.html)

#### NEW QUESTION 3

Which type of policy configures the suppression of faults that are generated from a port being down?

- A. fault lifecycle assignment
- B. event lifecycle assignment
- C. fault severity assignment
- D. event severity assignment

**Answer: C**

**Explanation:**

Reference: [https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/all/faults/guide/b\\_APIC\\_Faults\\_Errors/b\\_IFC\\_Faults\\_Errors\\_chapter\\_01.html](https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/all/faults/guide/b_APIC_Faults_Errors/b_IFC_Faults_Errors_chapter_01.html)

#### NEW QUESTION 4

Which type of profile needs to be created to deploy an access port policy group?

- A. attachable entity
- B. Pod
- C. module
- D. leaf interface

**Answer: A**


**Explanation:**

Reference: [https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/Operating\\_ACI/guide/b\\_Cisco\\_Operating\\_ACI/b\\_Cisco\\_Operating\\_ACI\\_chapter\\_0110.html](https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/Operating_ACI/guide/b_Cisco_Operating_ACI/b_Cisco_Operating_ACI_chapter_0110.html)

#### NEW QUESTION 5

DRAG DROP



An engineer is configuring a VRF for a tenant named Cisco. Drag and drop the child objects on the left onto the correct containers on the right for this configuration.

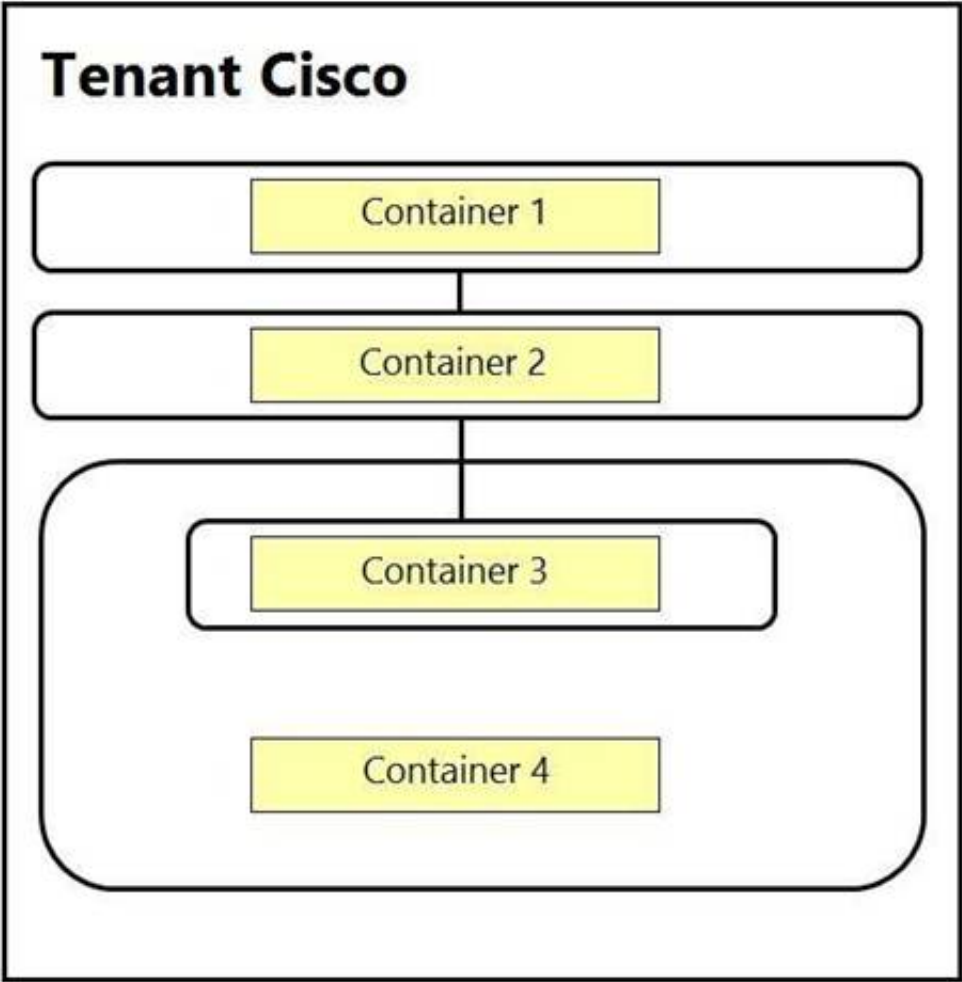

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

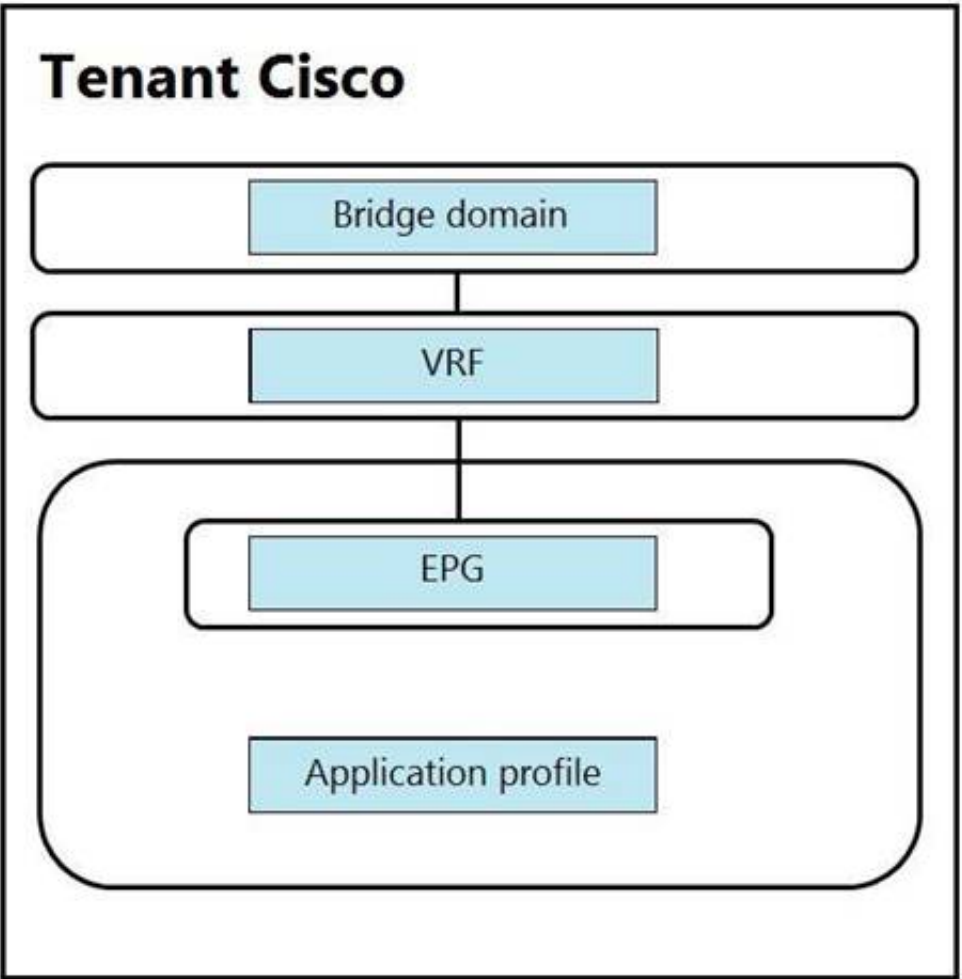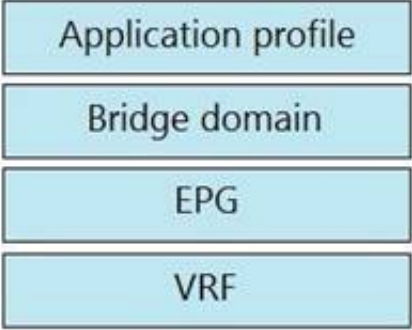

**NEW QUESTION 6**

Which feature allows firewall ACLs to be configured automatically when new endpoints are attached to an EPG?

- A. ARP gleaning
- B. dynamic endpoint attach
- C. hardware proxy
- D. network-stitching

Answer: B

**NEW QUESTION 7**

How is an EPG extended outside of the ACI fabric?

- A. Create an external bridged network that is assigned to a leaf port.

- B. Create an external routed network that is assigned to an EPG.
- C. Enable unicast routing within an EPG.
- D. Statically assign a VLAN ID to a leaf port in an EPG.

Answer: D

Explanation:

Reference: <https://www.dclessons.com/l2-external-network-with-aci>

NEW QUESTION 8

DRAG DROP

Drag and drop the Cisco ACI filter entry options from the left onto the correct categories on the right indicating what are required or optional parameters.

Name	Optional Parameters
ARP Flag	
Ether Type	
IP Protocol	
Source Port From	Required Parameters

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Reference: [https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/Operating\\_ACI/guide/b\\_Cisco\\_Operating\\_ACI/b\\_Cisco\\_Operating\\_ACI\\_chapter\\_01000.html](https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/Operating_ACI/guide/b_Cisco_Operating_ACI/b_Cisco_Operating_ACI_chapter_01000.html)

NEW QUESTION 9

Which description regarding the initial APIC cluster discovery process is true?

- A. The APIC uses an internal IP address from a pool to communicate with the nodes.
- B. Every switch is assigned a unique AV by the APIC.
- C. The APIC discovers the IP address of the other APIC controllers by using Cisco Discovery Protocol.
- D. The ACI fabric is discovered starting with the spine switches.

Answer: C

Explanation:

Reference: [https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/aci-fundamentals/b\\_ACI-Fundamentals/b\\_ACI-Fundamentals\\_chapter\\_010011.html](https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/aci-fundamentals/b_ACI-Fundamentals/b_ACI-Fundamentals_chapter_010011.html)

NEW QUESTION 10

Which two types of interfaces are supported on border leaf switches to connect to an external router? (Choose two.)

- A. subinterface with VXLAN tagging
- B. subinterface with 802.1Q tagging
- C. FEX host interface
- D. out of band interface
- E. Switch Virtual Interface

Answer: BE

NEW QUESTION 10

Which endpoint learning operation is completed on the egress leaf switch when traffic is received from an L3Out?

- A. The source MAC and IP address of the traffic is learned as a local endpoint.
- B. The source MAC address of the traffic is learned as a remote endpoint.
- C. No source MAC or IP address of the traffic is learned as a remote endpoint.

D. The source IP address of the traffic is learned as a remote endpoint.

**Answer:** B

**Explanation:**

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739989.html>

#### NEW QUESTION 12

An engineer is extending EPG connectivity to an external network. The external network houses the Layer 3 gateway and other end hosts. Which ACI bridge domain configuration should be used?

- A. Forwarding: CustomL2 Unknown Unicast: Hardware Proxy L3 Unknown Multicast Flooding: Flood Multi Destination Flooding: Flood in BD ARP Flooding: Enabled
- B. Forwarding: Custom L2 Unknown Unicast: FloodL3 Unknown Multicast Flooding: Flood Multi Destination Flooding: Flood in BD ARP Flooding: Enabled
- C. Forwarding: CustomL2 Unknown Unicast: Hardware Proxy L3 Unknown Multicast Flooding: Flood Multi Destination Flooding: Flood in BD ARP Flooding: Disabled
- D. Forwarding: Custom L2 Unknown Unicast: FloodL3 Unknown Multicast Flooding: Flood Multi Destination Flooding: Flood in BD ARP Flooding: Disabled

**Answer:** D

#### NEW QUESTION 17

An engineer configured a bridge domain with the hardware-proxy option for Layer 2 unknown unicast traffic. Which statement is true about this configuration?

- A. The leaf switch drops the Layer 2 unknown unicast packet if it is unable to find the MAC address in the local forwarding tables.
- B. The Layer 2 unknown hardware proxy lacks support of the topology change notification.
- C. The leaf switch forwards the Layers 2 unknown unicast packets to all other leaf switches if it is unable to find the MAC address in its local forwarding tables.
- D. The spine switch drops the Layer 2 unknown unicast packet if it is unable to find the MAC address in the proxy database.

**Answer:** A

#### NEW QUESTION 21

An engineer is implementing a connection that represents an external bridged network. Which two configurations are used? (Choose two.)

- A. Layer 2 remote fabric
- B. Layer 2 outside
- C. Layers 2 internal
- D. Static path binding
- E. VXLAN outside

**Answer:** AB

#### NEW QUESTION 23

What must be configured to redistribute externally learned OSPF routes within the ACI fabric?

- A. Route Control Profile
- B. BGP Route Reflector
- C. BGP Inter-leak Route Map
- D. PIM Sparse Mode

**Answer:** B

**Explanation:**

Reference: [https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/ACI\\_Best\\_Practices/b\\_ACI\\_Best\\_Practices/b\\_ACI\\_Best\\_Practices\\_chapter\\_010010.html](https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/ACI_Best_Practices/b_ACI_Best_Practices/b_ACI_Best_Practices_chapter_010010.html)

#### NEW QUESTION 28

Regarding the MTU value of MP-BGP EVPN control plane packets in Cisco ACI, which statement about communication between spine nodes in different sites is true?

- A. By default, spine nodes generate 9000-bytes packets to exchange endpoints routing informatio
- B. As a result, the Inter-Site network should be able to carry 9000-bytes packets.
- C. By default, spine nodes generate 1500-bytes packets to exchange endpoints routing informatio
- D. As a result, the Inter-Site network should be able to carry 1800-bytes packets.
- E. By default, spine nodes generate 1500-bytes packets to exchange endpoints routing informatio
- F. As a result, the Inter-Site network should be able to carry 1500-bytes packets.
- G. By default, spine nodes generate 9000-bytes packets to exchange endpoints routing informatio
- H. As a result, the Inter-Site network should be able to carry 9100-bytes packets.

**Answer:** D

#### NEW QUESTION 31

When configuring Cisco ACI VMM domain integration with VMware vCenter, which object is created in vCenter?

- A. datacenter
- B. VMware vSphere Standard vSwitch
- C. VMware vSphere Distributed Switch

D. cluster

**Answer:** C

#### NEW QUESTION 36

An engineer has set the VMM resolution immediacy to pre-provision in a Cisco ACI environment. No Cisco Discovery Protocol neighborship has been formed between the hypervisors and the ACI fabric leaf nodes. How does this affect the download policies to the leaf switches?

- A. No policies are downloaded because LLDP is the only supported discovery protocol.
- B. Policies are downloaded when the hypervisor host is connected to the VMM VDS.
- C. Policies are downloaded to the ACI leaf switch regardless of Cisco Discovery Protocol neighborship.
- D. No policies are downloaded because there is no discovery protocol neighborship.

**Answer:** C

#### NEW QUESTION 38

Which type of port is used for in-band management within ACI fabric?

- A. spine switch port
- B. APIC console port
- C. leaf access port
- D. management port

**Answer:** C

#### NEW QUESTION 39

Which statement about ACI syslog is true?

- A. Notifications for different scopes of syslog objects can be sent only to one destination.
- B. Syslog messages are sent to the destination through the spine.
- C. All syslog messages are sent to the destination through APIC.
- D. Switches send syslog messages directly to the destinations.

**Answer:** A

#### Explanation:

Reference: <https://www.ciscolive.com/c/dam/r/ciscolive/us/docs/2016/pdf/BRKACI-2303.pdf>

#### NEW QUESTION 42

Which protocol does ACI use to securely sane the configuration in a remote location?

- A. SCP
- B. HTTPS
- C. TFTP
- D. FTP

**Answer:** A

#### Explanation:

Reference: [https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/kb/b\\_KB\\_Using\\_Import\\_Export\\_to\\_Recover\\_Config\\_States.html](https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/kb/b_KB_Using_Import_Export_to_Recover_Config_States.html)

#### NEW QUESTION 43

In the context of ACI Multi-Site, when is the information of an endpoint (MAC/IP) that belongs to site 1 advertised to site 2 using the EVPN control plane?

- A. Endpoint information is not exchanged across sites unless COOP protocol is used.
- B. Endpoint information is not exchanged across sites unless a policy is configured to allow communication across sites.
- C. Endpoint information is exchanged across sites as soon as the endpoint is discovered in one site.
- D. Endpoint information is exchanged across sites when the endpoints are discovered in both sites.

**Answer:** A

#### Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739609.html#CiscoACIMultiSiteoverlaydataplane>

#### NEW QUESTION 45

What are two requirements for the IPN network when implementing a Multi-Pod ACI fabric? (Choose two.)

- A. EIGRP routing
- B. PIM ASM multicast routing
- C. BGP routing
- D. VLAN ID 4
- E. OSPF routing

**Answer:** AE



#### NEW QUESTION 48

A Solutions Architect is asked to design two data centers based on Cisco ACI technology that can extend L2/L3, VXLAN, and network policy across locations. ACI Multi-Pod has been selected. Which two requirements must be considered in this design? (Choose two.)

- A. ACI underlay protocols, i.
- B. COOP, IS-IS and MP-BGP, spans across pod
- C. Create QoS policies to make sure those protocols have higher priority.
- D. A single APIC Cluster is required in a Multi-Pod design
- E. It is important to place the APIC Controllers in different locations in order to maximize redundancy and reliability.
- F. ACI Multi-Pod requires an IP Network supporting PIM-Bidir.
- G. ACI Multi-Pod does not support Firewall Clusters across Pod
- H. Firewall Clusters should always be local.
- I. Multi-Pod requires multiple APIC Controller Clusters, one per pod
- J. Make sure those clusters can communicate to each other through a highly available connection.

**Answer:** AE

#### NEW QUESTION 51

.....

## Thank You for Trying Our Product

### We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

### 300-620 Practice Exam Features:

- \* 300-620 Questions and Answers Updated Frequently
- \* 300-620 Practice Questions Verified by Expert Senior Certified Staff
- \* 300-620 Most Realistic Questions that Guarantee you a Pass on Your First Try
- \* 300-620 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
**[Order The 300-620 Practice Test Here](#)**