

Exam Questions NSE5_FAZ-7.2

Fortinet NSE 5 - FortiAnalyzer 7.2

https://www.2passeasy.com/dumps/NSE5_FAZ-7.2/



NEW QUESTION 1

What FortiView tool can you use to automatically build a dataset and chart based on a filtered search result?

- A. Chart Builder
- B. Export to Report Chart
- C. Dataset Library
- D. Custom View

Answer: B

NEW QUESTION 2

What is the purpose of using prefilters when configuring event handlers?

- A. They limit which logs are checked for matches by the other filters.
- B. They can filter the logs before they are processed by FortiAnalyzer
- C. They download new filters to be used in event handlers.
- D. They are common filters applied simultaneously to all event handlers.

Answer: A

NEW QUESTION 3

FortiAnalyzer uses the Optimized Fabric Transfer Protocok (OFTP) over SSL for what purpose?

- A. To upload logs to an SFTP server
- B. To prevent log modification during backup
- C. To send an identical set of logs to a second logging server
- D. To encrypt log communication between devices

Answer: D

NEW QUESTION 4

Which statements are true regarding securing communications between FortiAnalyzer and FortiGate with SSL? (Choose two.)

- A. SSL is the default setting.
- B. SSL communications are auto-negotiated between the two devices.
- C. SSL can send logs in real-time only.
- D. SSL encryption levels are globally set on FortiAnalyzer.
- E. FortiAnalyzer encryption level must be equal to, or higher than, FortiGate.

Answer: AD

NEW QUESTION 5

What are two benefits of using fabric connectors? (Choose two.)

- A. They allow FortiAnalyzer to send logs in real-time to public cloud accounts.
- B. You do not need an additional license to send logs to the cloud platform.
- C. Fabric connectors allow you to improve redundancy.
- D. Using fabric connectors is more efficient than using third-party polling with API.

Answer: AC

NEW QUESTION 6

What are two of the key features of FortiAnalyzer? (Choose two.)

- A. Centralized log repository
- B. Cloud-based management
- C. Reports
- D. Virtual domains (VDOMs)

Answer: AC

NEW QUESTION 7

What statements are true regarding the "store and upload" log transfer option between FortiAnalyzer and FortiGate? (Choose three.)

- A. All FortiGates can send logs to FortiAnalyzer using the store and upload option.
- B. Only FortiGate models with hard disks can send logs to FortiAnalyzer using the store and upload option.
- C. Both secure communications methods (SSL and IPsec) allow the store and upload option.
- D. Disk logging is enabled on the FortiGate through the CLI only.
- E. Disk logging is enabled by default on the FortiGate.

Answer: BCD

NEW QUESTION 8

Which item must you configure on FortiAnalyzer to email generated reports automatically?

- A. Output profile
- B. Report scheduling
- C. SFTP server
- D. SNMP server

Answer: A

NEW QUESTION 9

FortiAnalyzer centralizes which functions? (Choose three)

- A. Network analysis
- B. Graphical reporting
- C. Content archiving / data mining
- D. Vulnerability assessment
- E. Security log analysis / forensics

Answer: BCE

NEW QUESTION 10

For which two purposes would you use the command set log checksum? (Choose two.)

- A. To help protect against man-in-the-middle attacks during log upload from FortiAnalyzer to an SFTP server
- B. To prevent log modification or tampering
- C. To encrypt log communications
- D. To send an identical set of logs to a second logging server

Answer: AB

Explanation:

To prevent logs from being tampered with while in storage, you can add a log checksum using the config system global command. You can configure FortiAnalyzer to record a log file hash value, timestamp, and authentication code when the log is rolled and archived and when the log is uploaded (if that feature is enabled). This can also help against man-in-the-middle only for the transmission from FortiAnalyzer to an SSH File Transfer Protocol (SFTP) server during log upload.
 FortiAnalyzer_7.0_Study_Guide-Online page 149

NEW QUESTION 10


Which two purposes does the auto cache setting on reports serve? (Choose two.)

- A. It automatically updates the hcache when new logs arrive.
- B. It provides diagnostics on report generation time.
- C. It reduces the log insert lag rate.
- D. It reduces report generation time.

Answer: AD

NEW QUESTION 13

Refer to the exhibit.

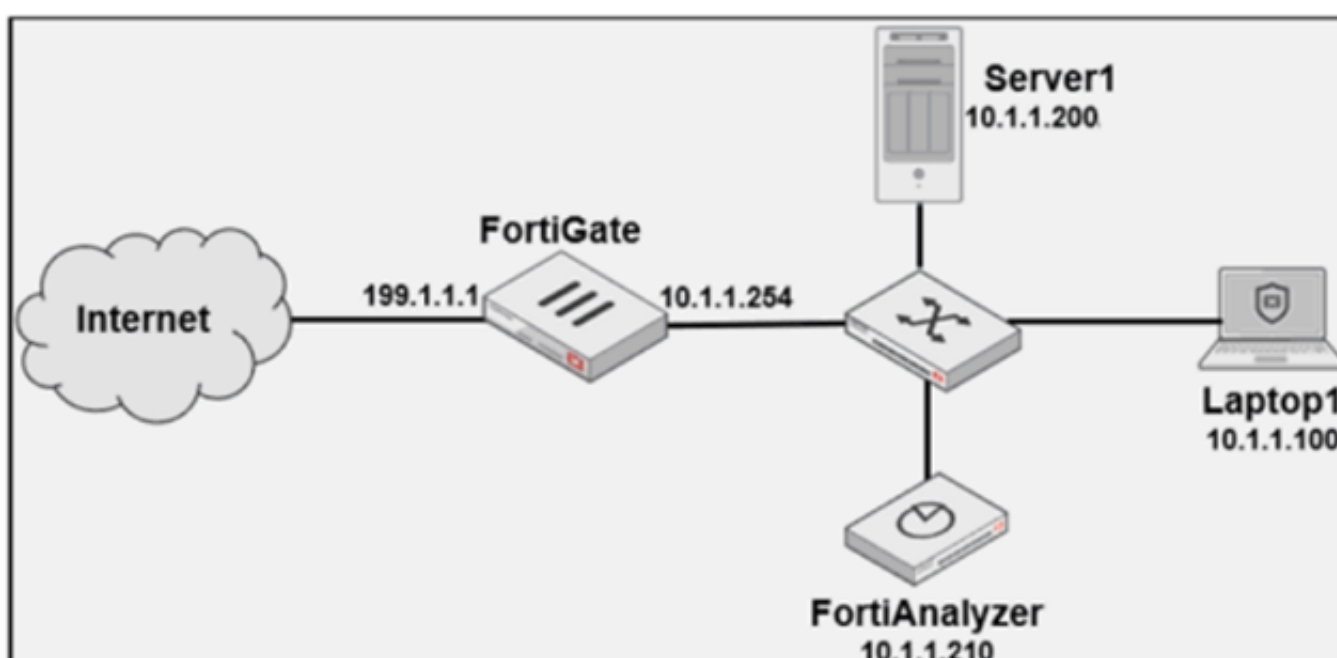

Laptop1 is used by several administrators to manage FortiAnalyzer. You want to configure a generic text filter that matches all login attempts to the web interface generated by any user other than "admin", and coming from Laptop1. Which filter will achieve the desired result?

- A. operation-login & dstip==10.1.1.210 & user!=admin
- B. operation-login & srcip==10.1.1.100 & dstip==10.1.1.210 & user==admin
- C. operation-login & performed_on=="GUI(10.1.1.210)" & user!=admin
- D. operation-login & performed_on=="GUI(10.1.1.100)" & user!=admin

Answer: D

NEW QUESTION 14

An administrator has moved FortiGate A from the root ADOM to ADOM1. Which two statements are true regarding logs? (Choose two.)

- A. Analytics logs will be moved to ADOM1 from the root ADOM automatically.
- B. Archived logs will be moved to ADOM1 from the root ADOM automatically.
- C. Logs will be presented in both ADOMs immediately after the move.
- D. Analytics logs will be moved to ADOM1 from the root ADOM after you rebuild the ADOM1 SQL database.

Answer: BD

NEW QUESTION 16

If a hard disk fails on a FortiAnalyzer that supports software RAID, what should you do to bring the FortiAnalyzer back to functioning normally, without losing data?

- A. Hot swap the disk
- B. Replace the disk and rebuild the RAID manually
- C. Take no action if the RAID level supports a failed disk
- D. Shut down FortiAnalyzer and replace the disk

Answer: D

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD46446#:~:text=On%20FortiAnalyzer%2FFortiMana> If a hard disk on a FortiAnalyzer unit fails, it must be replaced. On FortiAnalyzer devices that support hardware RAID, the hard disk can be replaced while the unit is still running – known as hot swapping. On FortiAnalyzer units with software RAID, the device must be shutdown prior to exchanging the hard disk.

NEW QUESTION 19

Which statement about sending notifications with incident updates is true?

- A. Notifications can be sent only when an incident is created or deleted.
- B. You must configure an output profile to send notifications by email.
- C. Each incident can send notifications to a single external platform.
- D. Each connector used can have different notification settings.

Answer: D

NEW QUESTION 23

You've moved a registered logging device out of one ADOM and into a new ADOM. What happens when you rebuild the new ADOM database?

- A. FortiAnalyzer resets the disk quota of the new ADOM to default.
- B. FortiAnalyzer migrates archive logs to the new ADOM.
- C. FortiAnalyzer migrates analytics logs to the new ADOM.
- D. FortiAnalyzer removes logs from the old ADOM.

Answer: C

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD40383>

NEW QUESTION 26

By default, what happens when a log file reaches its maximum file size?

- A. FortiAnalyzer overwrites the log files.
- B. FortiAnalyzer stops logging.
- C. FortiAnalyzer rolls the active log by renaming the file.
- D. FortiAnalyzer forwards logs to syslog.

Answer: C

NEW QUESTION 29

Which statements are true regarding securing communications between FortiAnalyzer and FortiGate with IPsec? (Choose two.)

- A. Must configure the FortiAnalyzer end of the tunnel only--the FortiGate end is auto-negotiated.
- B. Must establish an IPsec tunnel ID and pre-shared key.
- C. IPsec cannot be enabled if SSL is enabled as well.
- D. IPsec is only enabled through the CLI on FortiAnalyzer.

Answer: BD

Explanation:

Option B is correct because you must establish an IPsec tunnel ID and pre-shared key to secure the communication between FortiAnalyzer and FortiGate with IPsec12. The tunnel ID is a unique identifier for each tunnel and the pre-shared key is a secret passphrase that authenticates the peers. Option D is correct because IPsec is only enabled through the CLI on FortiAnalyzer1. You cannot configure IPsec settings through the GUI on FortiAnalyzer.

NEW QUESTION 32

Which two statements are true regarding FortiAnalyzer log forwarding? (Choose two.)

- A. Both modes, forwarding and aggregation, support encryption of logs between devices.
- B. In aggregation mode, you can forward logs to syslog and CEF servers as well.
- C. Aggregation mode stores logs and content files and uploads them to another FortiAnalyzer device at a scheduled time.
- D. Forwarding mode forwards logs in real time only to other FortiAnalyzer devices.

Answer: AC

Explanation:

- A) FortiAnalyzer_7.0_Study_Guide-Online.pdf page 148: The log communication between devices can be protected by encryption, with the desired encryption level, using the commands shown on the slide. (You need to interpret this. "Real time" and "aggregation" is about the "moment" when Fortigate sends the logs. However, no matter the moment, Fortigate will upload logs encrypted or unencrypted based on previous / different config).
- C) FortiAnalyzer_7.0_Study_Guide-Online.pdf page 147: Aggregation: Logs and content files stored and uploaded at scheduled time.

NEW QUESTION 36

Which two methods are the most common methods to control and restrict administrative access on FortiAnalyzer? (Choose two.)

- A. Virtual domains
- B. Administrative access profiles
- C. Trusted hosts
- D. Security Fabric

Answer: BC

NEW QUESTION 37

For which two SAML roles can the FortiAnalyzer be configured? (Choose two.)

- A. Principal
- B. Service provider
- C. Identity collector
- D. Identity provider

Answer: BD

NEW QUESTION 41

You need to upgrade your FortiAnalyzer firmware.

What happens to the logs being sent to FortiAnalyzer from FortiGate during the time FortiAnalyzer is temporarily unavailable?

- A. FortiAnalyzer uses log fetching to retrieve the logs when back online
- B. FortiGate uses the miglogd process to cache the logs
- C. The logfiled process stores logs in offline mode
- D. Logs are dropped

Answer: B

Explanation:

If FortiAnalyzer becomes unavailable to FortiGate for any reason, FortiGate uses its *miglogd* process to cache the logs. There is a maximum value to the cache size, and the miglogd process will drop cached logs. When the connection between the two devices is restored, the miglogd process begins to send the cached logs to FortiAnalyzer. Therefore, the FortiGate buffer will keep logs long enough to sustain a reboot of your FortiAnalyzer (if you are upgrading the firmware, for example). But it is not intended for a lengthy FortiAnalyzer outage.

NEW QUESTION 42

In the FortiAnalyzer FortiView, source and destination IP addresses from FortiGate devices are not resolving to a hostname.

How can you resolve the source and destination IP addresses, without introducing any additional performance impact to FortiAnalyzer?

- A. Resolve IP addresses on a per-ADOM basis to reduce delay on FortiView while IPs resolve
- B. Configure # set resolve-ip enable in the system FortiView settings
- C. Configure local DNS servers on FortiAnalyzer
- D. Resolve IP addresses on FortiGate

Answer: D

Explanation:

<https://packetplant.com/fortigate-and-fortianalyzer-resolve-source-and-destination-ip/>

“As a best practice, it is recommended to resolve IPs on the FortiGate end. This is because you get both source and destination, and it offloads the work from FortiAnalyzer. On FortiAnalyzer, this IP resolution does destination IPs only”

NEW QUESTION 44

What is Log Insert Lag Time on FortiAnalyzer?

- A. The number of times in the logs where end users experienced slowness while accessing resources.
- B. The amount of lag time that occurs when the administrator is rebuilding the ADOM database.
- C. The amount of time that passes between the time a log was received and when it was indexed on FortiAnalyzer.
- D. The amount of time FortiAnalyzer takes to receive logs from a registered device

Answer: C

NEW QUESTION 47

Which two statements are true regarding ADOM modes? (Choose two.)

- A. You can only change ADOM modes through CLI.
- B. In normal mode, the disk quota of the ADOM is fixed and cannot be modified, but in advance mode, the disk quota of the ADOM is flexible because new devices are added to the ADOM.
- C. In an advanced mode ADO
- D. you can assign FortiGate VDOMs from a single FortiGate device to multiple FortiAnalyzer ADOMs.
- E. Normal mode is the default ADOM mode.

Answer: CD

NEW QUESTION 48

Which two statement are true regardless initial Logs sync and Log Data Sync for Ha on FortiAnalyzer?

- A. By default, Log Data Sync is disabled on all backup device.
- B. Log Data Sync provides real-time log synchronization to all backup devices.
- C. With initial Logs Sync, when you add a unit to an HA cluster, the primary device synchronizes its logs with the backup device.
- D. When Logs Data Sync is turned on, the backup device will reboot and then rebuilt the log database with the synchronized logs.

Answer: CD

NEW QUESTION 49

Which statement describes a dataset in FortiAnalyzer?

- A. They determine what data is retrieved from the databas
- B. They provide the layout used for reports.
- C. They are used to set the data included in template
- D. They define the chart types to be used in report

Answer: A

NEW QUESTION 54

Which two statements are true regarding FortiAnalyzer operating modes? (Choose two.)

- A. When in collector mode, FortiAnalyzer collects logs from multiple devices and forwards these logs in the original binary format.
- B. Collector mode is the default operating mode.
- C. When in collector mod
- D. FortiAnalyzer supports event management and reporting features.
- E. By deploying different FortiAnalyzer devices with collector and analyzer mode in a network, you can improve the overall performance of log receiving, analysis, and reporting

Answer: AD

NEW QUESTION 57

Which tabs do not appear when FortiAnalyzer is operating in Collector mode?

- A. FortiView
- B. Event Management
- C. Device Manger
- D. Reporting

Answer: B

NEW QUESTION 62

Logs are being deleted from one of your ADOMs earlier that the configured setting for archiving in your data policy. What is the most likely problem?

- A. The total disk space is insufficient and you need to add other disk.
- B. CPU resources are too high.
- C. The ADOM disk quota is set too low based on log rates.
- D. Logs in that ADOM are being forwarded in real-time to another FortiAnalyzer device.

Answer: C

Explanation:

https://help.fortinet.com/fmgr/50hlp/56/5-6-1/FMG_FAZ/1100_Storage/0017_Deleted%20device%20logs.htm
<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/87802/automatic-deletion>

NEW QUESTION 67

Which two statements are true regarding high availability (HA) on FortiAnalyzer? (Choose two.)

- A. FortiAnalyzer HA can function without VRR
- B. and VRRP is required only if you have more than two FortiAnalyzer devices in a cluster.
- C. FortiAnalyzer HA supports synchronization of logs as well as some system and configuration settings.
- D. All devices in a FortiAnalyzer HA cluster must run in the same operation mode: analyzer or collector.

E. FortiAnalyzer HA implementation is supported by many public cloud infrastructures such as AWS, Microsoft Azure, and Google Cloud.

Answer: BC

NEW QUESTION 71

Which two statements about log forwarding are true? (Choose two.)

- A. Forwarded logs cannot be filtered to match specific criteria.
- B. Logs are forwarded in real-time only.
- C. The client retains a local copy of the logs after forwarding.
- D. You can use aggregation mode only with another FortiAnalyzer.

Answer: CD

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/420493/modes> <https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/621804/log-forwarding>

NEW QUESTION 76

What remote authentication servers can you configure to validate your FortiAnalyzer administrator logons? (Choose three)

- A. RADIUS
- B. Local
- C. LDAP
- D. PKI
- E. TACACS+

Answer: ACE

NEW QUESTION 81

What is the purpose of a dataset query in FortiAnalyzer?

- A. It sorts log data into tables
- B. It extracts the database schema
- C. It retrieves log data from the database
- D. It injects log data into the database

Answer: C

NEW QUESTION 85

Why run the command diagnose sql status sqlplugind?

- A. To list the current SQL processes running
- B. To check what is the database log insertion status
- C. To display the SOL query connections and hcache status
- D. To view the current hcache size

Answer: C

NEW QUESTION 89

What happens when the IOC breach detection engine on FortiAnalyzer finds web logs that match a blocklisted IP address?

- A. The endpoint is marked as Compromised and optionally, can be put in quarantine.
- B. FortiAnalyzer flags the associated host for further analysis.
- C. A new Infected entry is added for the corresponding endpoint.
- D. The detection engine classifies those logs as Suspicious

Answer: A

NEW QUESTION 90

What are the operating modes of FortiAnalyzer? (Choose two)

- A. Standalone
- B. Manager
- C. Analyzer
- D. Collector

Answer: CD

NEW QUESTION 92

What is the purpose of a predefined template on the FortiAnalyzer?

- A. It can be edited and modified as required
- B. It specifies the report layout which contains predefined texts, charts, and macros

- C. It specifies report settings which contains time period, device selection, and schedule
- D. It contains predefined data to generate mock reports

Answer: B

NEW QUESTION 94

How does FortiAnalyzer retrieve specific log data from the database?

- A. SQL FROM statement
- B. SQL GET statement
- C. SQL SELECT statement
- D. SQL EXTRACT statement


Answer: A

Explanation:

<https://fortinetweb.s3.amazonaws.com/docs.fortinet.com/v2/attachments/137bb60e-ff37-11e8-8524-f8bc1258b8>

NEW QUESTION 99

Refer to the exhibit.

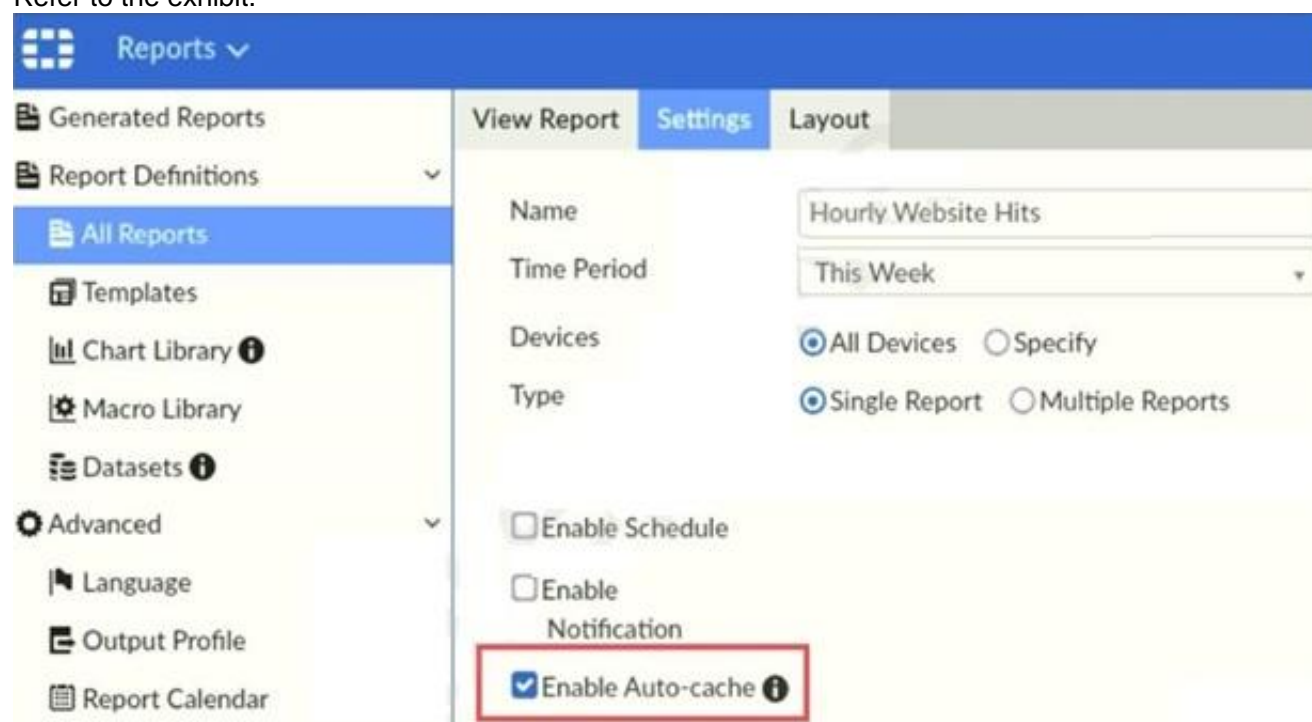

Which two statements are true regarding enabling auto-cache on FortiAnalyzer? (Choose two.)

- A. Report size will be optimized to conserve disk space on FortiAnalyzer.
- B. Reports will be cached in the memory.
- C. This feature is automatically enabled for scheduled reports.
- D. Enabling auto-cache reduces report generation time for reports that require a long time to assemble datasets.

Answer: CD

Explanation:

"Enable auto-cache in the report settings to boost the reporting performance and reduce report generation time. Scheduled reports have auto-cache enabled already."

FortiAnalyzer_7.0_Study_Guide-Online page 306

NEW QUESTION 102

Which daemon is responsible for enforcing raw log file size?

- A. logfiled
- B. oftpd
- C. sqlplugind
- D. miglogd

Answer: A

NEW QUESTION 103

A play book contains five tasks in total. An administrator executed the playbook and four out of five tasks finished successfully, but one task failed. What will be the status of the playbook after its execution?

- A. Success
- B. Failed
- C. Running
- D. Upstream_failed

Answer: B

Explanation:

Playbook jobs that include one or more failed tasks are labeled as Failed in Playbook Monitor. FortiAnalyzer_7.0_Study Guide page No: 247

Playbook jobs that include one or more failed tasks are labeled as Failed in Playbook Monitor. A failed status, however, does not mean that all tasks failed. Some

individual actions may have been completed successfully.

NEW QUESTION 108

Which statement correctly describes the management extensions available on FortiAnalyzer?

- A. Management extensions do not require additional licenses.
- B. Management extensions allow FortiAnalyzer to act as a FortiSIEM supervisor.
- C. Management extensions require a dedicated VM for best performance.
- D. Management extensions may require a minimum number of CPU cores to run.

Answer: D

Explanation:

Events in FortiAnalyzer will be in one of four statuses. The current status will determine if more actions need to be taken by the security team or not.

The possible statuses are:

Unhandled: The security event risk is not mitigated or contained, so it is considered open. Contained: The risk source is isolated.

Mitigated: The security risk is mitigated by being blocked or dropped. (Blank): Other scenarios.

FortiAnalyzer_7.0_Study_Guide-Online pag. 189.

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 189: Review the hardware requirements before you enable a management extension application. Some of them require a minimum amount of memory or a minimum number of CPU cores.

NEW QUESTION 111

Why should you use an NTP server on FortiAnalyzer and all registered devices that log into FortiAnalyzer?

- A. To properly correlate logs
- B. To use real-time forwarding
- C. To resolve host names
- D. To improve DNS response times

Answer: A

Explanation:

- Synchronize the time on FortiAnalyzer and all registered devices with an NTP server for proper log correlation

NEW QUESTION 113

Which two settings must you configure on FortiAnalyzer to allow non-local administrators to authenticate to FortiAnalyzer with any user account in a single LDAP group? (Choose two.)

- A. A local wildcard administrator account
- B. A remote LDAP server
- C. A trusted host profile that restricts access to the LDAP group
- D. An administrator group

Answer: AB

NEW QUESTION 118

On the RAID management page, the disk status is listed as Initializing.

What does the status Initializing indicate about what the FortiAnalyzer is currently doing?

- A. FortiAnalyzer is ensuring that the parity data of a redundant drive is valid
- B. FortiAnalyzer is writing data to a newly added hard drive to restore it to an optimal state
- C. FortiAnalyzer is writing to all of its hard drives to make the array fault tolerant
- D. FortiAnalyzer is functioning normally

Answer: C

NEW QUESTION 120

Refer to the exhibit.

The image displays the configuration of a FortiAnalyzer the administrator wants to join to an existing HA cluster. What can you conclude from the configuration displayed?

- A. This FortiAnalyzer will join to the existing HA cluster as the primary.
- B. This FortiAnalyzer is configured to receive logs in its port1.
- C. This FortiAnalyzer will trigger a failover after losing communication with its peers for 10 seconds.
- D. After joining to the cluster, this FortiAnalyzer will keep an updated log database.

Answer: B

Explanation:

"If the preferred role is Primary, then this unit becomes the primary unit if it is configured first in a new HA cluster. If there is an existing primary unit, then this unit becomes a secondary unit." (<https://docs.fortinet.com/document/fortianalyzer/7.0.5/administration-guide/275104>)

NEW QUESTION 125

You crested a playbook on FortiAnalyzer that uses a FortiOS connector

When configuring the FortiGate side, which type of trigger must be used so that the actions in an automation stitch are available in the FortiOS connector?

- A. FortiAnalyzer Event Handler
- B. Incoming webhook
- C. FortiOS Event Log
- D. Fabric Connector event

Answer: B

Explanation:

"One possible scenario is shown on the slide:

- * 1. Traffic flows through the FortiGate
- * 2. FortiGate sends logs to FortiAnalyzer
- * 3. FortiAnalyzer detects some suspicious traffic and generates an event
- * 4. The event triggers the execution of a playbook in FortiAnalyzer, which sends a webhook call to FortiGate so that it runs an automation stitch
- * 5. FortiGate runs the automation stitch with the corrective or preventive actions" FortiAnalyzer_7.0_Study_Guide-Online page 228

In order to see the actions related to the FOS connector, you must enable an automation rule using the Incoming Webhook Call trigger on the FortiGate side. FortiAnalyzer_7.0_Study Guide page no 233

NEW QUESTION 127

How are logs forwarded when FortiAnalyzer is using aggregation mode?

- A. Logs are forwarded as they are received and content files are uploaded at a scheduled time.
- B. Logs and content files are stored and uploaded at a scheduled time.
- C. Logs are forwarded as they are received.
- D. Logs and content files are forwarded as they are received.

Answer: B

Explanation:

<https://www.fortinetguru.com/2020/07/log-forwarding-fortianalyzer-fortios-6-2-3/> <https://docs.fortinet.com/document/fortianalyzer/6.2.0/administration-guide/420493/modes>

NEW QUESTION 131

An administrator has configured the following settings: config system fortiview settings



set resolve-ip enable end
 What is the significance of executing this command?

- A. Use this command only if the source IP addresses are not resolved on FortiGate.
- B. It resolves the source and destination IP addresses to a hostname in FortiView on FortiAnalyzer.
- C. You must configure local DNS servers on FortiGate for this command to resolve IP addresses on Forti Analyzer.
- D. It resolves the destination IP address to a hostname in FortiView on FortiAnalyzer.

Answer: D

NEW QUESTION 135

Refer to the exhibit.

Event	Event Status	Event Type	Count	Severity
<div> <div> 151.101.54.62 (1) </div> <div> Insecure SSL Connection blocked from 10.0.3.20 </div> </div>	Mitigated	 SSL	1	 Low

Which statement is correct regarding the event displayed?

- A. The security risk was blocked or dropped.
- B. The security event risk is considered open.
- C. An incident was created from this event.
- D. The risk source is isolated.

Answer: A

Explanation:

Events in FortiAnalyzer will be in one of four statuses. The current status will determine if more actions need to be taken by the security team or not. The possible statuses are:
 Unhandled: The security event risk is not mitigated or contained, so it is considered open. Contained: The risk source is isolated.
 Mitigated: The security risk is mitigated by being blocked or dropped. (Blank): Other scenarios.
 FortiAnalyzer_7.0_Study_Guide-Online pag. 206

NEW QUESTION 136

What statements are true regarding disk log quota? (Choose two)

- A. The FortiAnalyzer stops logging once the disk log quota is met.
- B. The FortiAnalyzer automatically sets the disk log quota based on the device.
- C. The FortiAnalyzer can overwrite the oldest logs or stop logging once the disk log quota is met.
- D. The FortiAnalyzer disk log quota is configurable, but has a minimum of 100mb a maximum based on the reserved system space.

Answer: CD

NEW QUESTION 141

When you perform a system backup, what does the backup configuration contain? (Choose two.)

- A. Generated reports
- B. Device list
- C. Authorized devices logs
- D. System information

Answer: BD

Explanation:

https://help.fortinet.com/fa/cli-olh/5-6-5/Content/Document/1400_execute/backup.htm

NEW QUESTION 146


For proper log correlation between the logging devices and FortiAnalyzer, FortiAnalyzer and all registered devices should:

- A. Use DNS
- B. Use host name resolution
- C. Use real-time forwarding
- D. Use an NTP server

Answer: D

NEW QUESTION 147

Refer to the exhibit.

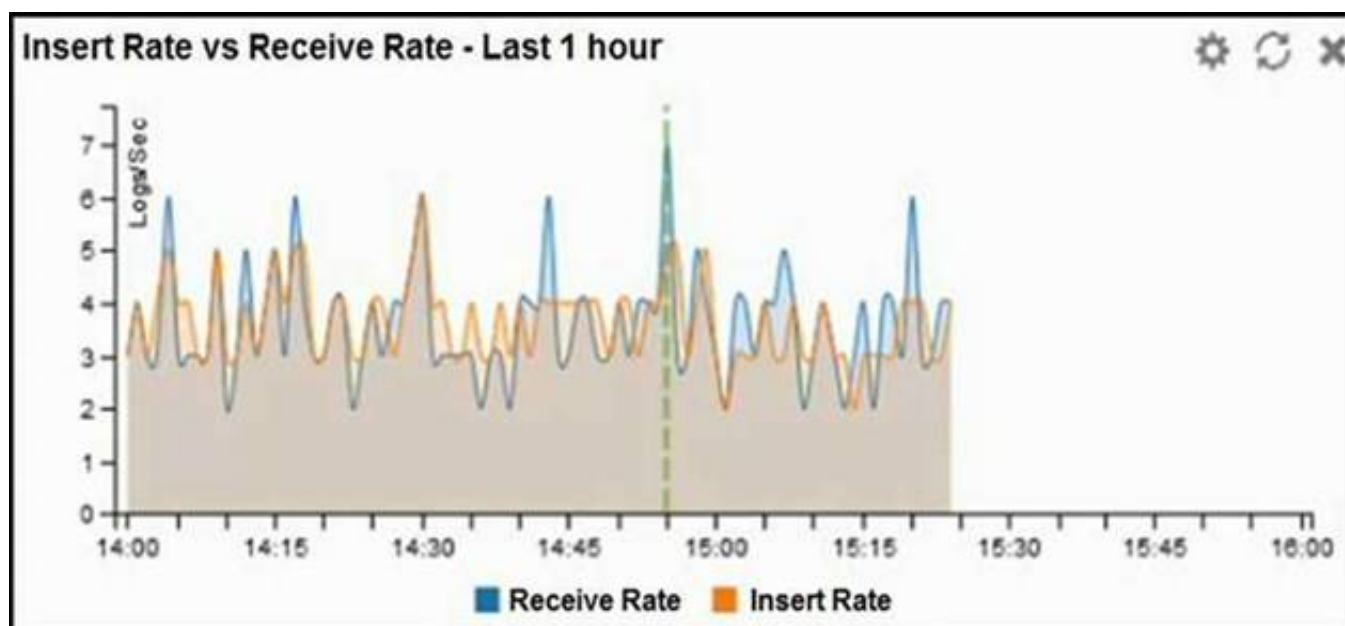

What does the data point at 14:55 tell you?

- A. The received rate is almost at its maximum for this device
- B. The sqlplugind daemon is behind in log indexing by two logs
- C. Logs are being dropped
- D. Raw logs are reaching FortiAnalyzer faster than they can be indexed

Answer: D

NEW QUESTION 152

Which FortiAnalyzer feature allows you to retrieve the archived logs matching a specific timeframe from another FortiAnalyzer device?

- A. Log upload
- B. Indicators of Compromise
- C. Log forwarding an aggregation mode
- D. Log fetching

Answer: D

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.0/administration-guide/651442/fetcher-management>

NEW QUESTION 155

What does the disk status Degraded mean for RAID management?

- A. One or more drives are missing from the FortiAnalyzer uni
- B. The drive is no longer available to the operating system.
- C. The FortiAnalyzer device is writing to all the hard drives on the device in order to make the array fault tolerant.
- D. The FortiAnalyzer device is writing data to a newly added hard drive in order to restore the hard drive to an optimal state.
- E. The hard drive is no longer being used by the RAID controller

Answer: D

NEW QUESTION 157

FortiAnalyzer reports are dropping analytical data from 15 days ago, even though the data policy setting for analytics logs is 60 days. What is the most likely problem?

- A. Quota enforcement is acting on analytical data before a report is complete
- B. Logs are rolling before the report is run
- C. CPU resources are too high
- D. Disk utilization for archive logs is set for 15 days

Answer: B

NEW QUESTION 158

Which two of the following must you configure on FortiAnalyzer to email a FortiAnalyzer report externally? (Choose two.)


- A. Mail server
- B. Output profile
- C. SFTP server
- D. Report scheduling

Answer: AB

NEW QUESTION 160

Refer to the exhibits.

Event	Event Status	Event Type	Count	Severity	First Occurrence	Last Update	Handler	Tags
> MS.IIS.bdir.HTR.Information.Disclosure (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
> PHPURL.Code.Injection (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
> 91.189.92.18 (1)	Mitigated	SSL	5	Low	2 hours ago	2 hours ago	Default-Risky-Destination-Detection-By-Threat	Risky SSL
> HTTP.RequestURL.Directory.Traversal (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
> Apache.Expect.Header.XSS (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
✓ 10.0.1.10 (7)							Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion MS.IIS.bdir.HTR.Informati...	Mitigated	IPS	2	Medium	2021-12-01 21:32:33	2021-12-01 21:32:41	Default-Risky-Destination-Detection-By-Endpoint	Risky SSL
Internal intrusion PHPURL.Code.Injection bl...	Mitigated	IPS	2	Medium	2021-12-01 21:32:11	2021-12-01 21:32:21	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Insecure SSL connection blocked	Mitigated	SSL	5	Low	2021-12-01 21:32:01	2021-12-01 21:32:01	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion HTTP.RequestURL.Direct...	Mitigated	IPS	2	Medium	2021-12-01 21:31:51	2021-12-01 21:32:01	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion Apache.Expect.Header.XS...	Mitigated	IPS	2	Medium	2021-12-01 21:31:31	2021-12-01 21:31:41	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
✓ 10.200.1.254 (6)								
Internal intrusion MS.IIS.bdir.HTR.Informati...	Mitigated	IPS	2	Medium	2021-12-01 21:32:33	2021-12-01 21:32:41	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion PHPURL.Code.Injection bl...	Mitigated	IPS	2	Medium	2021-12-01 21:32:11	2021-12-01 21:32:21	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion HTTP.RequestURL.Direct...	Mitigated	IPS	2	Medium	2021-12-01 21:31:51	2021-12-01 21:32:01	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion Apache.Expect.Header.XS...	Mitigated	IPS	2	Medium	2021-12-01 21:31:31	2021-12-01 21:31:41	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion HTTP.Password.Access blocke...	Mitigated	IPS	2	Medium	2021-12-01 21:31:11	2021-12-01 21:31:21	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion Nikto.Web-Scanner detect...	Unmitigated	IPS	21	High	2021-12-01 21:31:11	2021-12-01 21:32:36	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature

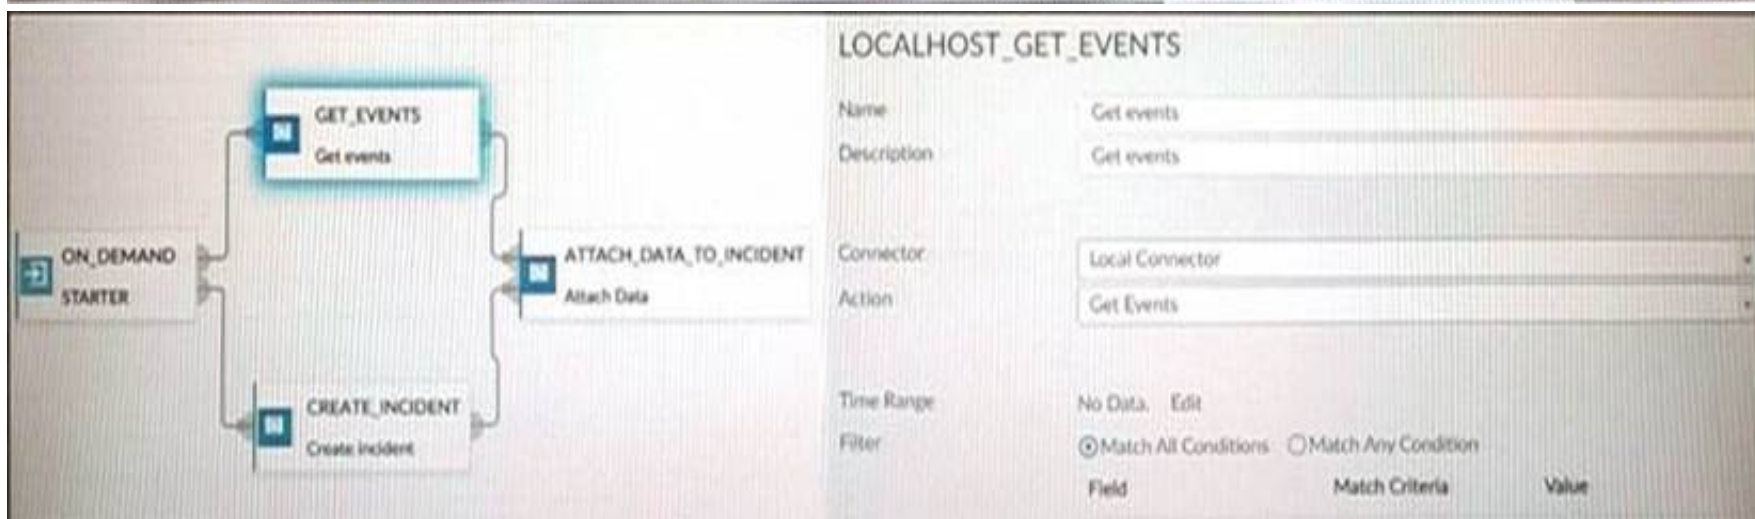

How many events will be added to the incident created after running this playbook?

- A. Ten events will be added.
- B. No events will be added.
- C. Five events will be added.
- D. Thirteen events will be added.

Answer: A

NEW QUESTION 162

Which log will generate an event with the status Contained?

- A. An IPS log with action=pass.
- B. A WebFilter log with action=dropped.
- C. An AV log with action=quarantine.
- D. An AppControl log with action=blocked.

Answer: C

NEW QUESTION 163

What is the purpose of the following CLI command?

```
# configure system global
  set log-checksum md5
end
```

- A. To add a log file checksum
- B. To add the MD's hash value and authentication code
- C. To add a unique tag to each log to prove that it came from this FortiAnalyzer
- D. To encrypt log communications

Answer: A

Explanation:

https://docs2.fortinet.com/document/fortianalyzer/6.0.3/cli-reference/849211/global

NEW QUESTION 167

View the exhibit:

Data Policy

Keep Logs for Analytics	<input type="text" value="60"/>	<input type="text" value="Days"/>
Keep Logs for Archive	<input type="text" value="365"/>	<input type="text" value="Days"/>

Disk Utilization

Maximum Allowed	<input type="text" value="1000"/>	<input type="text" value="MB"/>	Out of Available: 62.8 GB
Analytics: Archive	<input type="text" value="70%"/>	<input type="text" value="30%"/>	
Alert and Delete When Usage Reaches	<input type="text" value="90%"/>		

☐ Modify

What does the 1000MB maximum for disk utilization refer to?

- A. The disk quota for the FortiAnalyzer model
- B. The disk quota for all devices in the ADOM
- C. The disk quota for each device in the ADOM
- D. The disk quota for the ADOM type

Answer: B

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.0/administration-guide/743670/configuring-log-storage-pol>

NEW QUESTION 171

Why must you wait for several minutes before you run a playbook that you just created?

- A. FortiAnalyzer needs that time to parse the new playbook.
- B. FortiAnalyzer needs that time to back up the current playbooks.
- C. FortiAnalyzer needs that time to ensure there are no other playbooks running.
- D. FortiAnalyzer needs that time to debug the new playbook.

Answer: A

NEW QUESTION 175

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual NSE5_FAZ-7.2 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the NSE5_FAZ-7.2 Product From:

https://www.2passeasy.com/dumps/NSE5_FAZ-7.2/

Money Back Guarantee

NSE5_FAZ-7.2 Practice Exam Features:

- * NSE5_FAZ-7.2 Questions and Answers Updated Frequently
- * NSE5_FAZ-7.2 Practice Questions Verified by Expert Senior Certified Staff
- * NSE5_FAZ-7.2 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * NSE5_FAZ-7.2 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year