

Paloalto-Networks

Exam Questions PCNSE

Palo Alto Networks Certified Security Engineer (PCNSE) PAN-OS 8.0



NEW QUESTION 1

Which three split tunnel methods are supported by a globalProtect gateway? (Choose three.)

- A. video streaming application
- B. Client Application Process
- C. Destination Domain
- D. Source Domain
- E. Destination user/group
- F. URL Category

Answer: ABC

NEW QUESTION 2

An administrator is defining protection settings on the Palo Alto Networks NGFW to guard against resource exhaustion. When platform utilization is considered, which steps must the administrator take to configure and apply packet buffer protection?

- A. Enable and configure the Packet Buffer protection thresholds.Enable Packet Buffer Protection per ingress zone.
- B. Enable and then configure Packet Buffer thresholdsEnable Interface Buffer protection.
- C. Create and Apply Zone Protection Profiles in all ingress zones.Enable Packet Buffer Protection per ingress zone.
- D. Configure and apply Zone Protection Profiles for all egress zones.Enable Packet Buffer Protection pre egress zone.
- E. Enable per-vsys Session Threshold alerts and triggers for Packet Buffer Limits.Enable Zone Buffer Protection per zone.

Answer: A

NEW QUESTION 3

What should an administrator consider when planning to revert Panorama to a pre-PAN-OS 8.1 version?

- A. Panorama cannot be reverted to an earlier PAN-OS release if variables are used in templates or template stacks.
- B. An administrator must use the Expedition tool to adapt the configuration to the pre-PAN-OS 8.1 state.
- C. When Panorama is reverted to an earlier PAN-OS release, variables used in templates or template stacks will be removed automatically.
- D. Administrators need to manually update variable characters to those used in pre-PAN-OS 8.1.

Answer: A

NEW QUESTION 4

An administrator has been asked to configure active/active HA for a pair of Palo Alto Networks NGFWs. The firewall use Layer 3 interfaces to send traffic to a single gateway IP for the pair.

Which configuration will enable this HA scenario?

- A. The two firewalls will share a single floating IP and will use gratuitous ARP to share the floating IP.
- B. Each firewall will have a separate floating IP, and priority will determine which firewall has the primary IP.
- C. The firewalls do not use floating IPs in active/active HA.
- D. The firewalls will share the same interface IP address, and device 1 will use the floating IP if device 0 fails.

Answer: A

NEW QUESTION 5

How does Panorama prompt VMWare NSX to quarantine an infected VM?

- A. HTTP Server Profile
- B. Syslog Server Profile
- C. Email Server Profile
- D. SNMP Server Profile

Answer: A

NEW QUESTION 6

Which CLI command is used to simulate traffic going through the firewall and determine which Security policy rule, NAT translation, static route, or PBF rule will be triggered by the traffic?

- A. check
- B. find
- C. test
- D. sim


Answer: C

Explanation:

Reference: <http://www.shanekillen.com/2014/02/palo-alto-useful-cli-commands.html>

NEW QUESTION 7

Refer to exhibit.

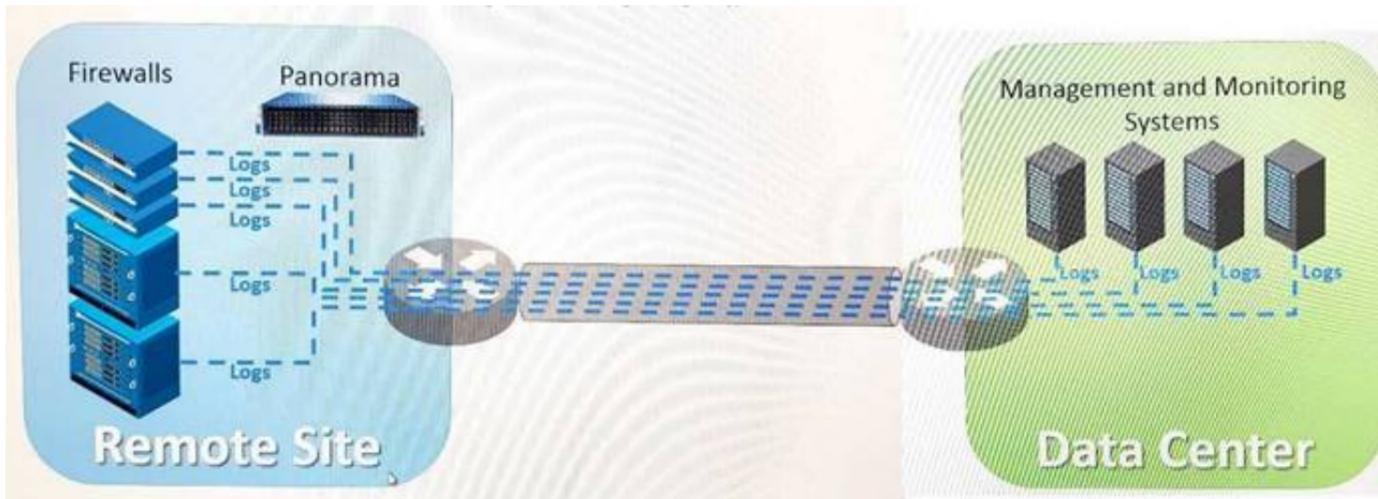

An organization has Palo Alto Networks NGFWs that send logs to remote monitoring and security management platforms. The network team has reported excessive traffic on the corporate WAN. How could the Palo Alto Networks NGFW administrator reduce WAN traffic while maintaining support for all existing monitoring/ security platforms?

- A. Forward logs from firewalls only to Panorama and have Panorama forward logs to other external services.
- B. Forward logs from external sources to Panorama for correlation, and from Panorama send them to the NGFW.
- C. Configure log compression and optimization features on all remote firewalls.
- D. Any configuration on an M-500 would address the insufficient bandwidth concerns.

Answer: A

NEW QUESTION 8

A customer wants to set up a VLAN interface for a Layer 2 Ethernet port. Which two mandatory options are used to configure a VLAN interface? (Choose two.)

- A. Virtual router
- B. Security zone
- C. ARP entries
- D. Netflow Profile

Answer: AB

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/80/pan-os/web-interface-help/network/network-interfaces/pa-7000-series-layer-2-interface#idd2bcaacc-54b9-4ec9-a1dd-8064499f5b9d>

NEW QUESTION 9

An administrator has been asked to configure a Palo Alto Networks NGFW to provide protection against worms and trojans. Which Security Profile type will protect against worms and trojans?

- A. Anti-Spyware
- B. WildFire
- C. Vulnerability Protection
- D. Antivirus

Answer: A

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/policy/antivirus- profiles>

NEW QUESTION 10

An administrator encountered problems with inbound decryption. Which option should the administrator investigate as part of triage?

- A. Security policy rule allowing SSL to the target server
- B. Firewall connectivity to a CRL
- C. Root certificate imported into the firewall with "Trust" enabled
- D. Importation of a certificate from an HSM

Answer: A

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/80/pan-os/pan-os/decryption/configure-ssl-inbound-inspection>

NEW QUESTION 10

Which two virtualization platforms officially support the deployment of Palo Alto Networks VM- Series firewalls? (Choose two.)

- A. Red Hat Enterprise Virtualization (RHEV)
- B. Kernel Virtualization Module (KVM)
- C. Boot Strap Virtualization Module (BSVM)
- D. Microsoft Hyper-V

Answer: BD

Explanation:

Reference: <https://www.paloaltonetworks.com/products/secure-the-network/virtualized-next-generation-firewall/vm-series>

NEW QUESTION 12

Which User-ID method maps IP addresses to usernames for users connecting through an 802.1x-enabled wireless network device that has no native integration with PAN-OS® software?

- A. XML API
- B. Port Mapping
- C. Client Probing
- D. Server Monitoring

Answer: A

Explanation:

Captive Portal and the other standard user mapping methods might not work for certain types of user access. For example, the standard methods cannot add mappings of users connecting from a third-party VPN solution or users connecting to a 802.1x-enabled wireless network. For such cases, you can use the PAN-OS XML API to capture login events and send them to the PAN-OS integrated User-ID agent Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/user-id/user-id-concepts>

NEW QUESTION 14

Decrypted packets from the website <https://www.microsoft.com> will appear as which application and service within the Traffic log?

- A. web-browsing and 443
- B. SSL and 80
- C. SSL and 443
- D. web-browsing and 80

Answer: A

NEW QUESTION 15

A Security policy rule is configured with a Vulnerability Protection Profile and an action of "Deny". Which action will this cause configuration on the matched traffic?

- A. The configuration is invalid
- B. The Profile Settings section will be grayed out when the Action is set to "Deny".
- C. The configuration will allow the matched session unless a vulnerability signature is detected
- D. The "Deny" action will supersede the per-severity defined actions defined in the associated Vulnerability Protection Profile.
- E. The configuration is invalid
- F. It will cause the firewall to skip this Security policy rule
- G. A warning will be displayed during a commit.
- H. The configuration is valid
- I. It will cause the firewall to deny the matched session
- J. Any configured Security Profiles have no effect if the Security policy rule action is set to "Deny."

Answer: B

NEW QUESTION 20

What are two benefits of nested device groups in Panorama? (Choose two.)

- A. Reuse of the existing Security policy rules and objects
- B. Requires configuring both function and location for every device
- C. All device groups inherit settings from the Shared group
- D. Overwrites local firewall configuration

Answer: BC

NEW QUESTION 24

Which Captive Portal mode must be configured to support MFA authentication?

- A. NTLM
- B. Redirect
- C. Single Sign-On
- D. Transparent

Answer: B

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/80/pan-os/pan-os/authentication/configure-multi-factor-authentication>

NEW QUESTION 25

How would an administrator monitor/capture traffic on the management interface of the Palo Alto Networks NGFW?

- A. Use the debug dataplane packet-diag set capture stage firewall file command.
- B. Enable all four stages of traffic capture (TX, RX, DROP, Firewall).
- C. Use the debug dataplane packet-diag set capture stage management file command.
- D. Use the tcpdump command.

Answer: D

Explanation:

Reference: <https://live.paloaltonetworks.com/t5/Learning-Articles/How-to-Run-a-Packet-Capture/ta-p/62390>

NEW QUESTION 29

An administrator needs to optimize traffic to prefer business-critical applications over non-critical applications. QoS natively integrates with which feature to provide service quality?

- A. Port Inspection
- B. Certificate revocation
- C. Content-ID
- D. App-ID

Answer: D


Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/quality-of-service/qos-for-applications-and-users>


NEW QUESTION 30

An administrator needs to determine why users on the trust zone cannot reach certain websites. The only information available is shown on the following image. Which configuration change should the administrator make?




A)

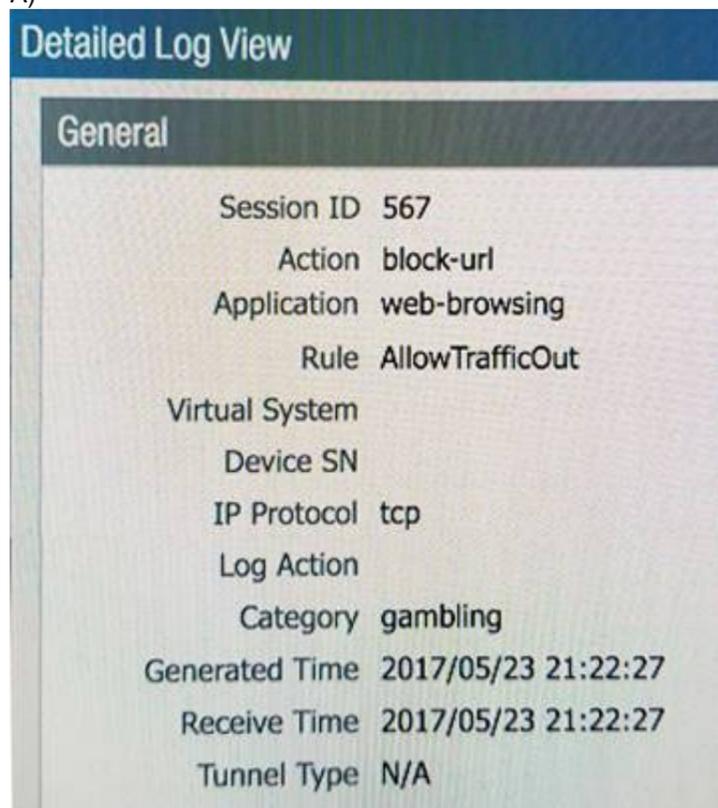

B)

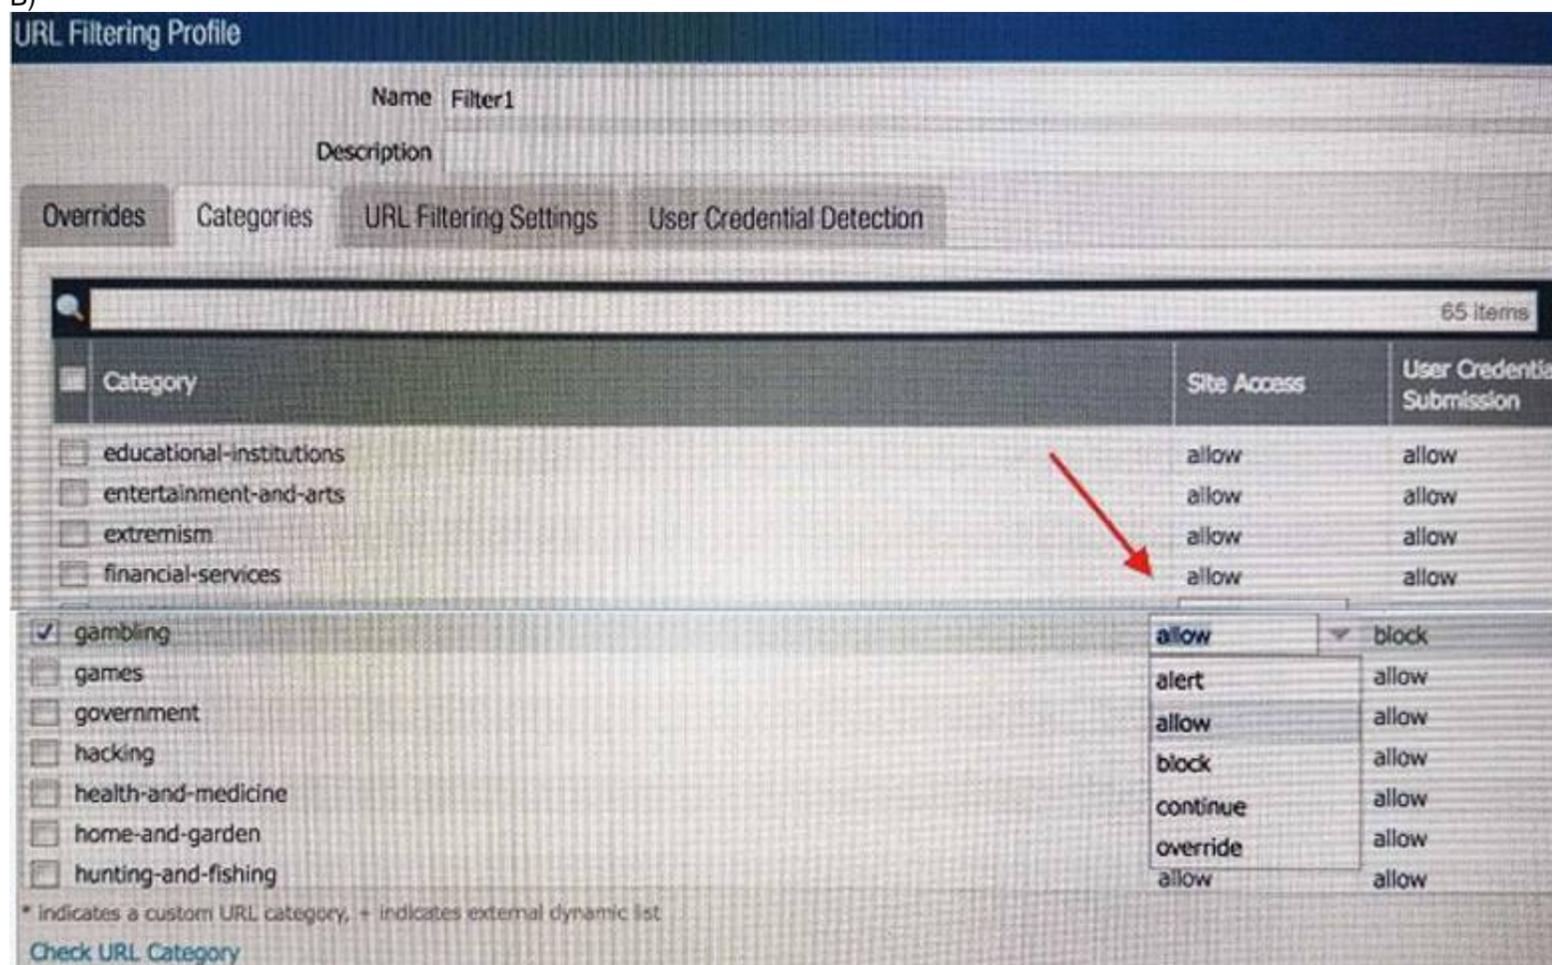

C)

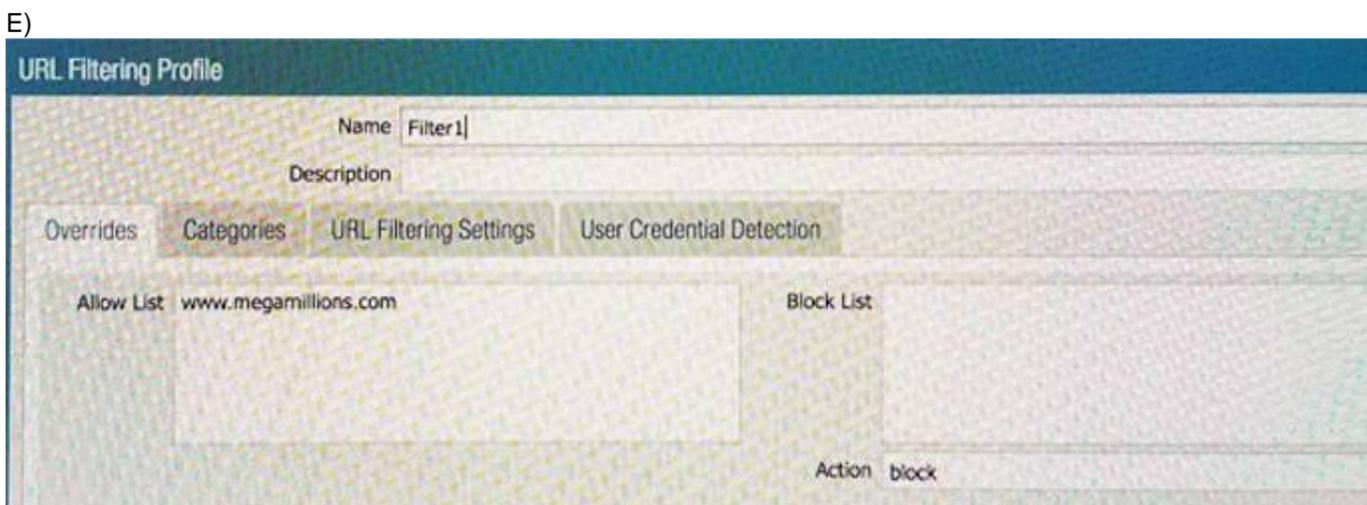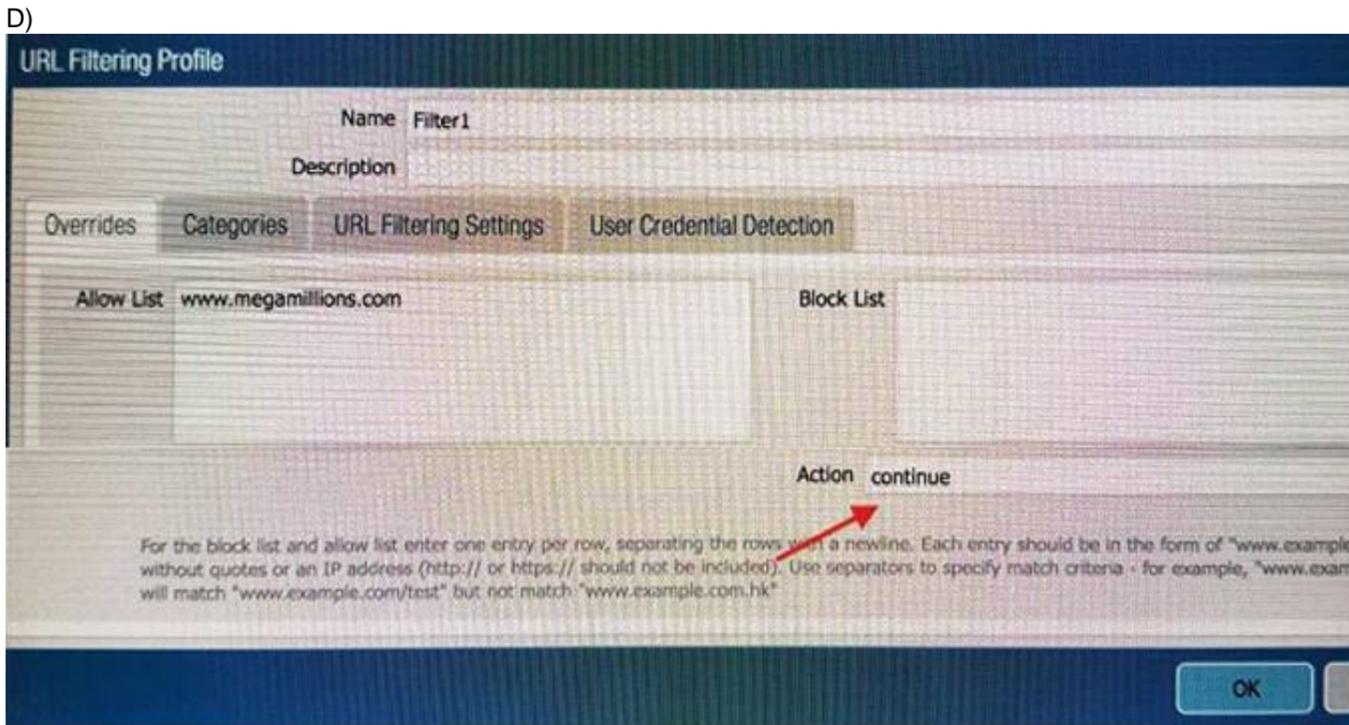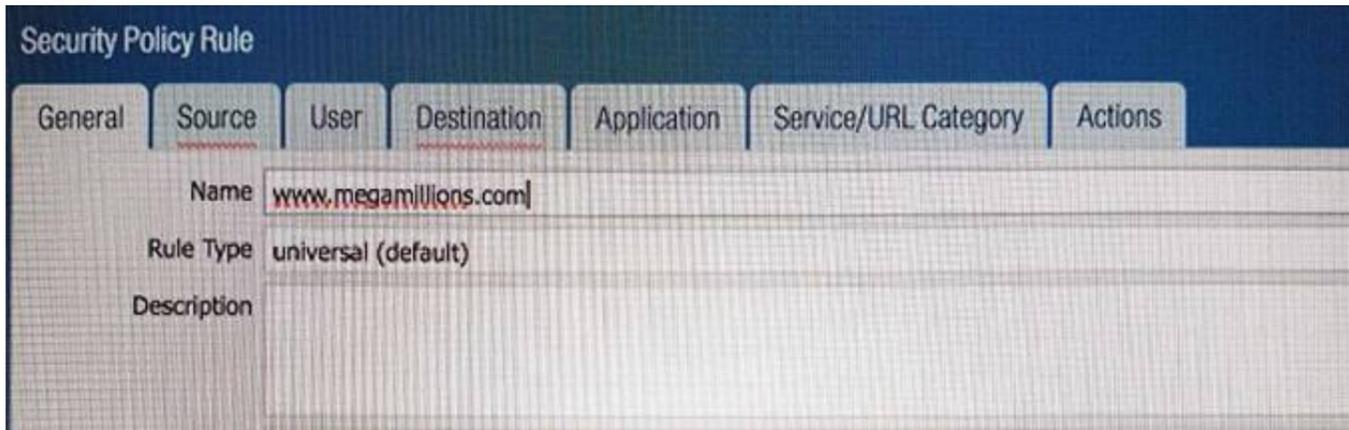

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E

Answer: B

NEW QUESTION 34

An administrator logs in to the Palo Alto Networks NGFW and reports that the WebUI is missing the Policies tab. Which profile is the cause of the missing Policies tab?

- A. Admin Role
- B. WebUI
- C. Authentication
- D. Authorization

Answer: A

NEW QUESTION 39

VPN traffic intended for an administrator's Palo Alto Networks NGFW is being maliciously intercepted and retransmitted by the interceptor. When creating a VPN tunnel, which protection profile can be enabled to prevent this malicious behavior?

- A. Zone Protection
- B. DoS Protection
- C. Web Application
- D. Replay

Answer: A

NEW QUESTION 40

Which Palo Alto Networks VM-Series firewall is valid?

- A. VM-25
- B. VM-800
- C. VM-50
- D. VM-400


Answer: C

Explanation:

Reference: <https://www.paloaltonetworks.com/products/secure-the-network/virtualized-next-generation-firewall/vm-series>

NEW QUESTION 41

An administrator wants multiple web servers in the DMZ to receive connections initiated from the internet. Traffic destined for 206.15.22.9 port 80/TCP needs to be forwarded to the server at 10.1.1.22

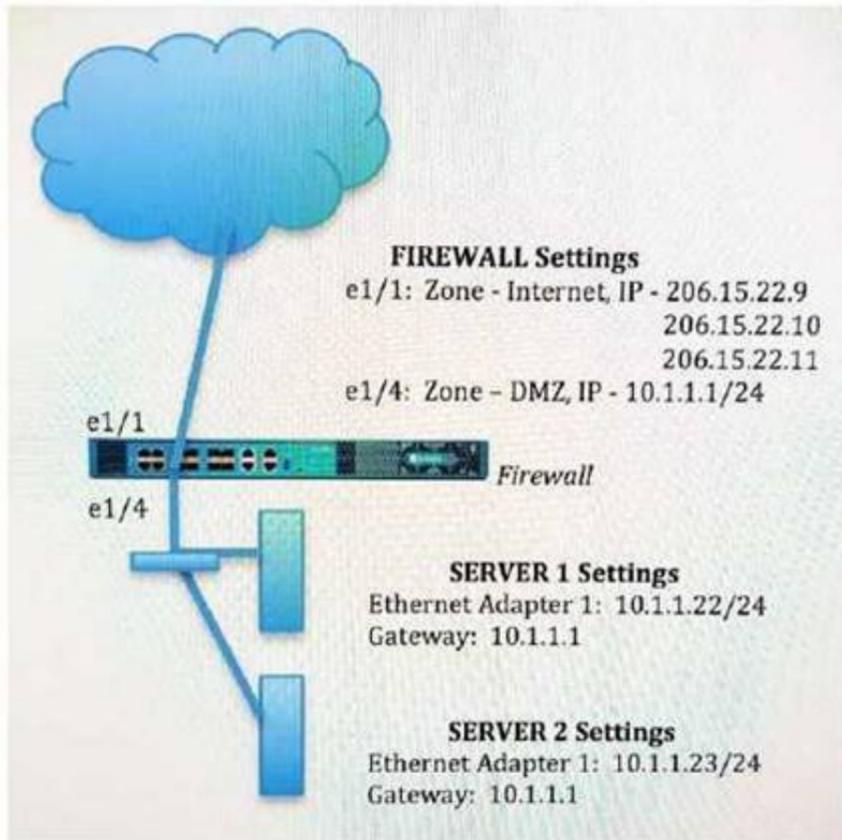

Based on the information shown in the image, which NAT rule will forward web-browsing traffic correctly?

- A)
 - Source IP: Any
 - Destination IP: 206.15.22.9
 - Source Zone: Internet
 - Destination Zone: DMZ
 - Destination Service: 80/TCP
 - Action: Destination NAT
 - Translated IP: 10.2.2.23
 - Translated Port: 53/UDP
- B)
 - Source IP: Any
 - Destination IP: 206.15.22.9
 - Source Zone: Internet
 - Destination Zone: Internet
 - Destination Service: 80/TCP
 - Action: Destination NAT
 - Translated IP: 10.1.1.22
 - Translated Port: 53/UDP
- C)

Source IP: Any
Destination IP: 206.15.22.9
Source Zone: Internet
Destination Zone: Internet
Destination Service: 80/TCP
Action: Destination NAT
Translated IP: 10.1.1.22
Translated Port: None

D)

Source IP: Any
Destination IP: 206.15.22.9
Source Zone: Internet
Destination Zone: DMZ
Destination Service: 80/TCP
Action: Destination NAT
Translated IP: 10.1.1.22
Translated Port: 80/TCP

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 42

An administrator creates a custom application containing Layer 7 signatures. The latest application and threat dynamic update is downloaded to the same NGFW. The update contains an application that matches the same traffic signatures as the custom application. Which application should be used to identify traffic traversing the NGFW?

- A. Custom application
- B. System logs show an application error and neither signature is used.
- C. Downloaded application
- D. Custom and downloaded application signature files are merged and both are used

Answer: A

NEW QUESTION 46

Refer to the exhibit.

```
#####
admin@Lab33-111-PA-3060(active)>show routing fib

id      destination      nexthop      flags      interface      mtu
-----
47      0.0.0.0/0        10.46.40.1   ug         ethernet1/3    1500
46      10.46.40.0/23    0.0.0.0      u          ethernet1/3    1500
45      10.46.41.111/32  0.0.0.0      uh         ethernet1/3    1500
70      10.46.41.113/32  10.46.40.1   ug         ethernet1/3    1500
51      192.168.111.0/24 0.0.0.0      u          ethernet1/6    1500
50      192.168.111.2/32 0.0.0.0      uh         ethernet1/6    1500
```

```
#####

admin@Lab33-111-PA-3060(active)>show virtual-wire all

total virtual-wire shown:
flags: m-multicast firewalling
       p= link state pass-through
       s- vlan sub-interface
       i- ip+vlan sub-interface
       t-tenant sub-interface
```

name	interface1	interface2	flags	allowed-tags
VW-1	ethernet1/7	ethernet1/5	p	

Which will be the egress interface if the traffic's ingress interface is ethernet 1/7 sourcing from 192.168.111.3 and to the destination 10.46.41.113?

- A. ethernet1/6
- B. ethernet1/3
- C. ethernet1/7
- D. ethernet1/5

Answer: D

NEW QUESTION 49

Which event will happen if an administrator uses an Application Override Policy?

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Reference: <https://live.paloaltonetworks.com/t5/Learning-Articles/Tips-and-Tricks-How-to-Create-an-Application-Override/ta-p/65513>

NEW QUESTION 50

An administrator has users accessing network resources through Citrix XenApp 7 x. Which User-ID mapping solution will map multiple users who are using Citrix to connect to the network and access resources?

- A. Client Probing
- B. Terminal Services agent
- C. GlobalProtect
- D. Syslog Monitoring

Answer: B

NEW QUESTION 52

An administrator needs to upgrade a Palo Alto Networks NGFW to the most current version of PAN- OS® software. The firewall has internet connectivity through an Ethernet interface, but no internet connectivity from the management interface. The Security policy has the default security rules and a rule that allows all web-browsing traffic from any to any zone. What must the administrator configure so that the PAN-OS® software can be upgraded?

- A. Security policy rule
- B. CRL
- C. Service route
- D. Scheduler

Answer: A

NEW QUESTION 54

Which feature prevents the submission of corporate login information into website forms?

- A. Data filtering
- B. User-ID
- C. File blocking
- D. Credential phishing prevention

Answer: D

Explanation:

Reference: <https://www.paloaltonetworks.com/cyberpedia/how-the-next-generation-security-platform-contributes-to-gdpr-compliance>

NEW QUESTION 59

Refer to the exhibit.

Name	Location	Subject	Issuer	CA	Key	Expires	Status	Algorithm	Usage
Domain-Root-Cert	vsys1	DC = local, DC = lab, CN = lab-DEMO-2008R2-CA	DC = local, DC = lab, CN = lab-DEMO-2008R2-CA	<input checked="" type="checkbox"/>		Nov 1 00:34:47 2021 GMT	valid	RSA	Trusted Root CA Certificate
Domain-Sub-CA	vsys1	CN = sca.lab.local	DC = local, DC = lab, CN = lab-DEMO-2008R2-CA	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Jun 6 20:59:38 2019 GMT	valid	RSA	
Forward_Trust	vsys1	CN = fwdtrust.la...	CN = sca.lab.local		<input checked="" type="checkbox"/>	Jun 6 21:09:49 2018 GMT	valid	RSA	

Which certificates can be used as a Forwarded Trust certificate?

- A. Certificate from Default Trust Certificate Authorities
- B. Domain Sub-CA
- C. Forward_Trust
- D. Domain-Root-Cert

Answer: A

NEW QUESTION 62

Which item enables a firewall administrator to see details about traffic that is currently active through the NGFW?

- A. ACC
- B. System Logs
- C. App Scope
- D. Session Browser

Answer: D

NEW QUESTION 64

Which CLI command can be used to export the tcpdump capture?

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Reference: <https://live.paloaltonetworks.com/t5/Management-Articles/How-To-Packet-Capture-tcpdump-On-Management-Interface/ta-p/55415>

NEW QUESTION 65

Which CLI command enables an administrator to view details about the firewall including uptime, PAN-OS® version, and serial number?

- A. debug system details
- B. show session info
- C. show system info
- D. show system details

Answer: C

Explanation:

Reference: https://www.paloaltonetworks.com/content/dam/pan/en_US/assets/pdf/technical-documentation/pan-os-60/PAN-OS-6.0-CLI-ref.pdf

NEW QUESTION 70


During the packet flow process, which two processes are performed in application identification? (Choose two.)

- A. Pattern based application identification
- B. Application override policy match
- C. Application changed from content inspection
- D. Session application identified.

Answer: BD

NEW QUESTION 74

The certificate information displayed in the following image is for which type of certificate? Exhibit:

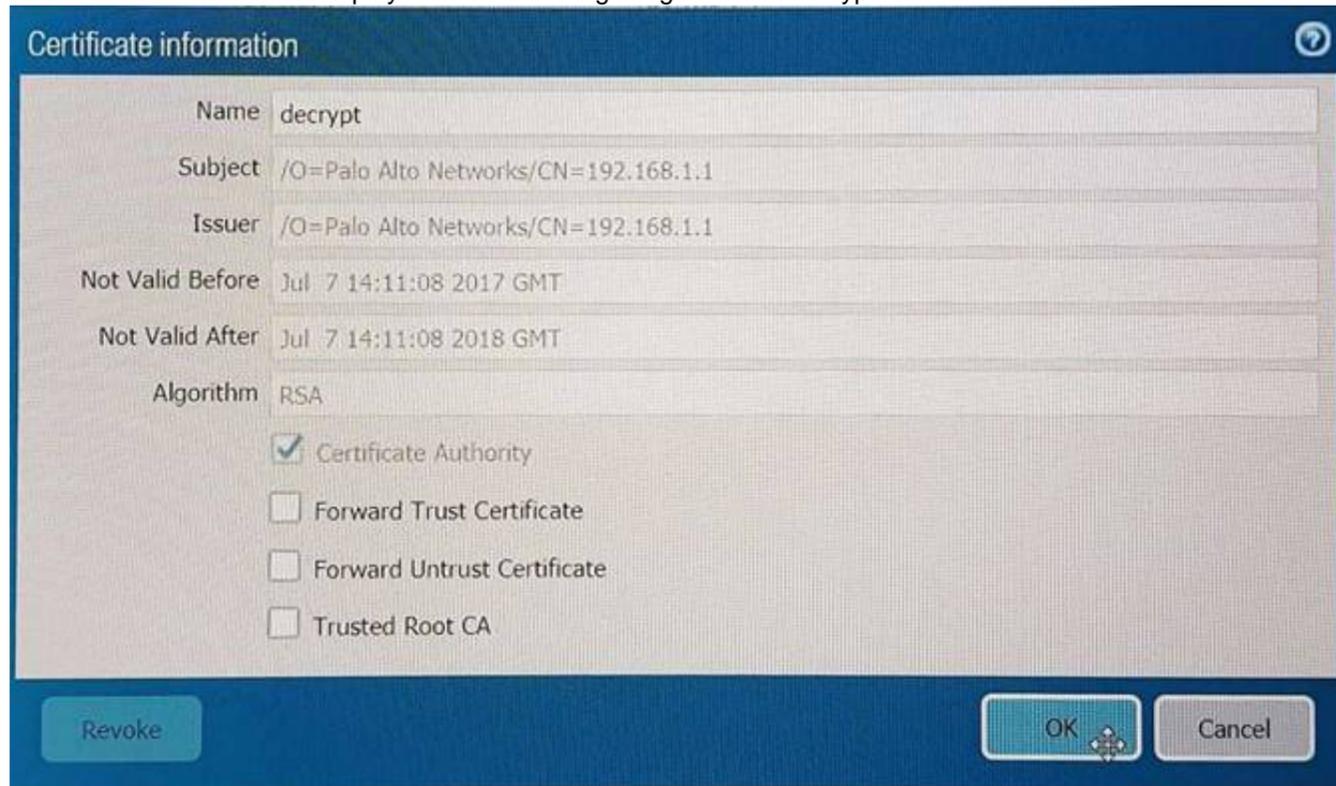

- A. Forward Trust certificate
- B. Self-Signed Root CA certificate
- C. Web Server certificate
- D. Public CA signed certificate

Answer: D

NEW QUESTION 76

Which three steps will reduce the CPU utilization on the management plane? (Choose three.)

- A. Disable SNMP on the management interface.
- B. Application override of SSL application.
- C. Disable logging at session start in Security policies.
- D. Disable predefined reports.
- E. Reduce the traffic being decrypted by the firewall.

Answer: CDE

NEW QUESTION 79

If an administrator does not possess a website's certificate, which SSL decryption mode will allow the Palo Alto networks NGFW to inspect when users browse to HTTP(S) websites?

- A. SSL Forward Proxy
- B. SSL Inbound Inspection
- C. TLS Bidirectional proxy
- D. SSL Outbound Inspection

Answer: A

NEW QUESTION 83

The administrator has enabled BGP on a virtual router on the Palo Alto Networks NGFW, but new routes do not seem to be populating the virtual router. Which two options would help the administrator troubleshoot this issue? (Choose two.)

- A. View the System logs and look for the error messages about BGP.
- B. Perform a traffic pcap on the NGFW to see any BGP problems.
- C. View the Runtime Stats and look for problems with BGP configuration.
- D. View the ACC tab to isolate routing issues.

Answer: CD

NEW QUESTION 84

Which virtual router feature determines if a specific destination IP address is reachable?

- A. Heartbeat Monitoring

- B. Failover
- C. Path Monitoring
- D. Ping-Path

Answer: C

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/policy/pbf>

NEW QUESTION 87

An administrator has been asked to configure a Palo Alto Networks NGFW to provide protection against external hosts attempting to exploit a flaw in an operating system on an internal system. Which Security Profile type will prevent this attack?

- A. Vulnerability Protection
- B. Anti-Spyware
- C. URL Filtering
- D. Antivirus

Answer: A

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/web-interface-help/objects/objects-security-profiles-vulnerability-protection>

NEW QUESTION 88

Which processing order will be enabled when a Panorama administrator selects the setting “Objects defined in ancestors will take higher precedence?”

- A. Descendant objects will take precedence over other descendant objects.
- B. Descendant objects will take precedence over ancestor objects.
- C. Ancestor objects will have precedence over descendant objects.
- D. Ancestor objects will have precedence over other ancestor objects.

Answer: C

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/web-interface-help/device/device-setup-management>

NEW QUESTION 93

An administrator using an enterprise PKI needs to establish a unique chain of trust to ensure mutual authentication between Panorama and the managed firewalls and Log Collectors. How would the administrator establish the chain of trust?

- A. Use custom certificates
- B. Enable LDAP or RADIUS integration
- C. Set up multi-factor authentication
- D. Configure strong password authentication

Answer: A


Explanation:

Reference:

https://www.paloaltonetworks.com/documentation/80/panorama/panorama_adminguide/panorama-overview/plan-your-panorama-deployment

NEW QUESTION 94

Refer to the exhibit.

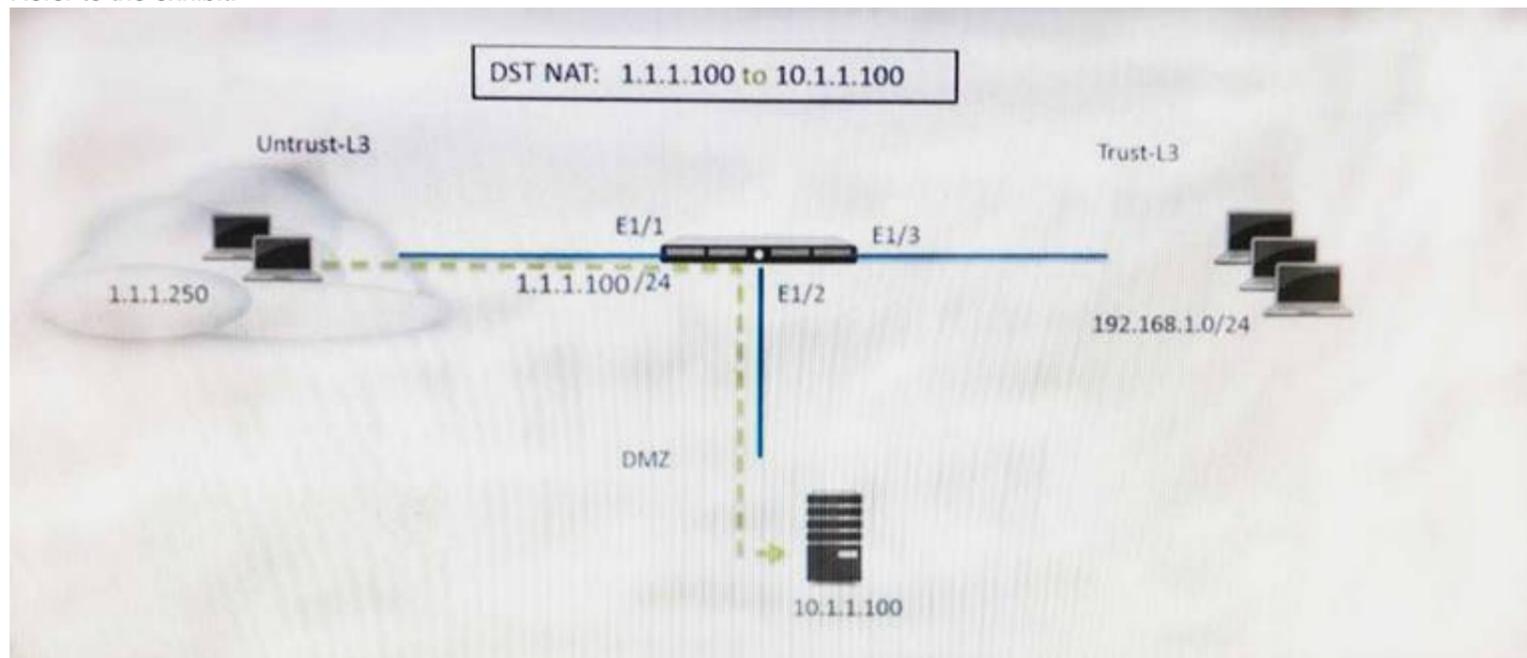

A web server in the DMZ is being mapped to a public address through DNAT. Which Security policy rule will allow traffic to flow to the web server?

- A. Untrust (any) to Untrust (10. 1.1. 100), web browsing – Allow
- B. Untrust (any) to Untrust (1. 1. 1. 100), web browsing – Allow

- C. Untrust (any) to DMZ (1. 1. 1. 100), web browsing – Allow
- D. Untrust (any) to DMZ (10. 1. 1. 100), web browsing – Allow

Answer: B

NEW QUESTION 96

Which two options prevent the firewall from capturing traffic passing through it? (Choose two.)

- A. The firewall is in multi-vsyst mode.
- B. The traffic is offloaded.
- C. The traffic does not match the packet capture filter.
- D. The firewall's DP CPU is higher than 50%.

Answer: BC

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/80/pan-os/pan-os/monitoring/take-packet-captures/disable-hardware-offload>

NEW QUESTION 100

Which feature can be configured on VM-Series firewalls?

- A. aggregate interfaces
- B. machine learning
- C. multiple virtual systems
- D. GlobalProtect

Answer: D

NEW QUESTION 105

In High Availability, which information is transferred via the HA data link?

- A. session information
- B. heartbeats
- C. HA state information
- D. User-ID information

Answer: A

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/high-availability/ha-links-and-backup-links>

NEW QUESTION 110

Which DoS protection mechanism detects and prevents session exhaustion attacks?

- A. Packet Based Attack Protection
- B. Flood Protection
- C. Resource Protection
- D. TCP Port Scan Protection


Answer: C

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/policy/dos-protection-profiles>

NEW QUESTION 111

View the GlobalProtect configuration screen capture.

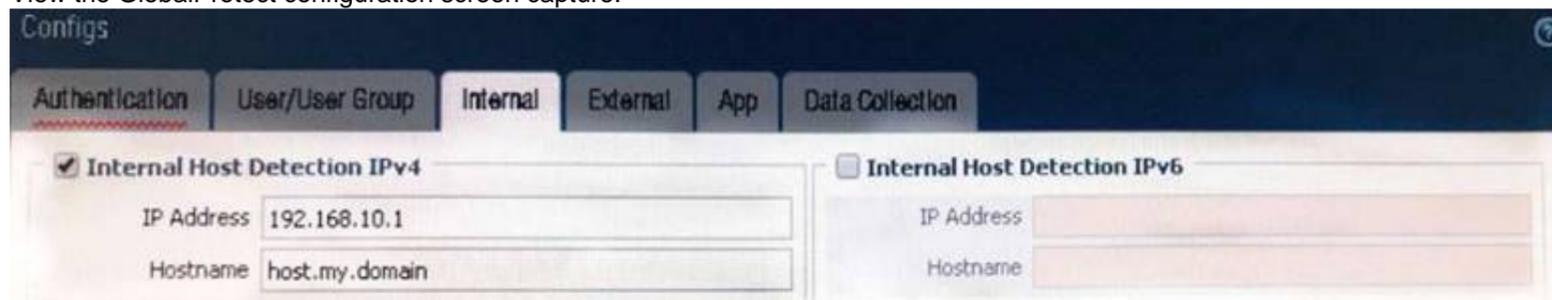

What is the purpose of this configuration?

- A. It configures the tunnel address of all internal clients to an IP address range starting at 192.168.10.1.
- B. It forces an internal client to connect to an internal gateway at IP address 192.168.10.1.
- C. It enables a client to perform a reverse DNS lookup on 192.168.10.1 to detect that it is an internal client.
- D. It forces the firewall to perform a dynamic DNS update, which adds the internal gateway's hostname and IP address to the DNS server.

Answer: C

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/80/globalprotect/globalprotect-admin-guide/globalprotect-portals/define-the-globalprotect-client-authentication-configurations/define-the-globalprotect-agent-configurations>

NEW QUESTION 116

Which prerequisite must be satisfied before creating an SSH proxy Decryption policy?

- A. Both SSH keys and SSL certificates must be generated.
- B. No prerequisites are required.
- C. SSH keys must be manually generated.
- D. SSL certificates must be generated.

Answer: B

Explanation:

Reference: <https://www.paloaltonetworks.com/documentation/71/pan-os/pan-os/decryption/configure-ssh-proxy>

NEW QUESTION 118

For which two reasons would a firewall discard a packet as part of the packet flow sequence? (Choose two)

- A. equal-cost multipath
- B. ingress processing errors
- C. rule match with action "allow"
- D. rule match with action "deny"

Answer: BD

NEW QUESTION 123

The firewall determines if a packet is the first packet of a new session or if a packet is part of an existing session using which kind of match?

- A. 5-tuple matchSource IP Address, Destination IP Address, Source Port, Destination Port, Protocol
- B. 7-tuple matchSource IP Address, Destination IP Address, Source Port, Destination Port ,Source User, URL Category and Source Security Zone.
- C. 6-tuple matchSource IP Address, Destination IP Address, Source Port, Destination Port, Protocol and Source Security Zone
- D. 9-tuple matchSource IP Address, Destination IP Address, Source Port, Destination Port, Source User, Source Security Zone, Destination Security Zone, Application and URL Category

Answer: A

NEW QUESTION 128

A company wants to install a PA-3060 firewall between two core switches on a VLAN trunk link. They need to assign each VLAN to its own zone and to assign untagged (native) traffic to its own zone which options differentiates multiple VLAN into separate zones?

- A. Create VLAN objects for each VLAN and assign VLAN interfaces matching each VLAN I
- B. Repeat forevery additional VLANand use a VLAN ID of 0 for untagged traffi
- C. Assign each interface/subinterface to a unique zone.
- D. Create V-Wire objects with two V-Wire sub interface and assign only a single VLAN ID to the "Tag Allowed field one of the V-Wire object Repeat for every additional VLAN and use a VIAN ID of 0 for untagged traffi
- E. Assign each interface/subinterfaceto a unique zone.
- F. Create V-Wire objects with two V-Wire interfaces and define a range "0- 4096" in the "Tag Allowed filed of the V-Wire object.
- G. Create Layer 3 sub interfaces that are each assigned to a single VLAN ID and a common virtual route
- H. The physical Layer 3interface would handle untagged traffi
- I. Assign each interface /subinterface to a unique zon
- J. Do not assign any interface anIP address

Answer: C

NEW QUESTION 131

Which menu item enables a firewall administrator to see details about traffic that is currently active through the NGFW?

- A. App Scope
- B. ACC
- C. Session Browser
- D. System Logs

Answer: C

NEW QUESTION 136

Which two features does PAN-OS® software use to identify applications? (Choose two)

- A. port number
- B. session number
- C. transaction characteristics
- D. application layer payload

Answer: CD

NEW QUESTION 141

Which log file can be used to identify SSL decryption failures?

- A. Configuration
- B. Threats
- C. ACC
- D. Traffic

Answer: C

NEW QUESTION 146

An administrator wants a new Palo Alto Networks NGFW to obtain automatic application updates daily, so it is configured to use a scheduler for the application database. Unfortunately, they required the management network to be isolated so that it cannot reach the internet. Which configuration will enable the firewall to download and install application updates automatically?

- A. Configure a Policy Based Forwarding policy rule for the update server IP address so that traffic sourced from the management interface destined for the update servers goes out of the interface acting as your internet connection.
- B. Configure a security policy rule to allow all traffic to and from the update servers.
- C. Download and install application updates cannot be done automatically if the MGT port cannot reach the internet.
- D. Configure a service route for Palo Alto networks services that uses a dataplane interface that can route traffic to the internet, and create a security policy rule to allow the traffic from that interface to the update servers if necessary.

Answer: B

NEW QUESTION 150


An administrator wants to upgrade an NGFW from PAN-OS® 7 .1. 2 to PAN-OS® 8 .0.2 The firewall is not a part of an HA pair. What needs to be updated first?

- A. XML Agent
- B. Applications and Threats
- C. WildFire
- D. PAN-OS® Upgrade Agent

Answer: B

NEW QUESTION 154

Refer to the exhibit.

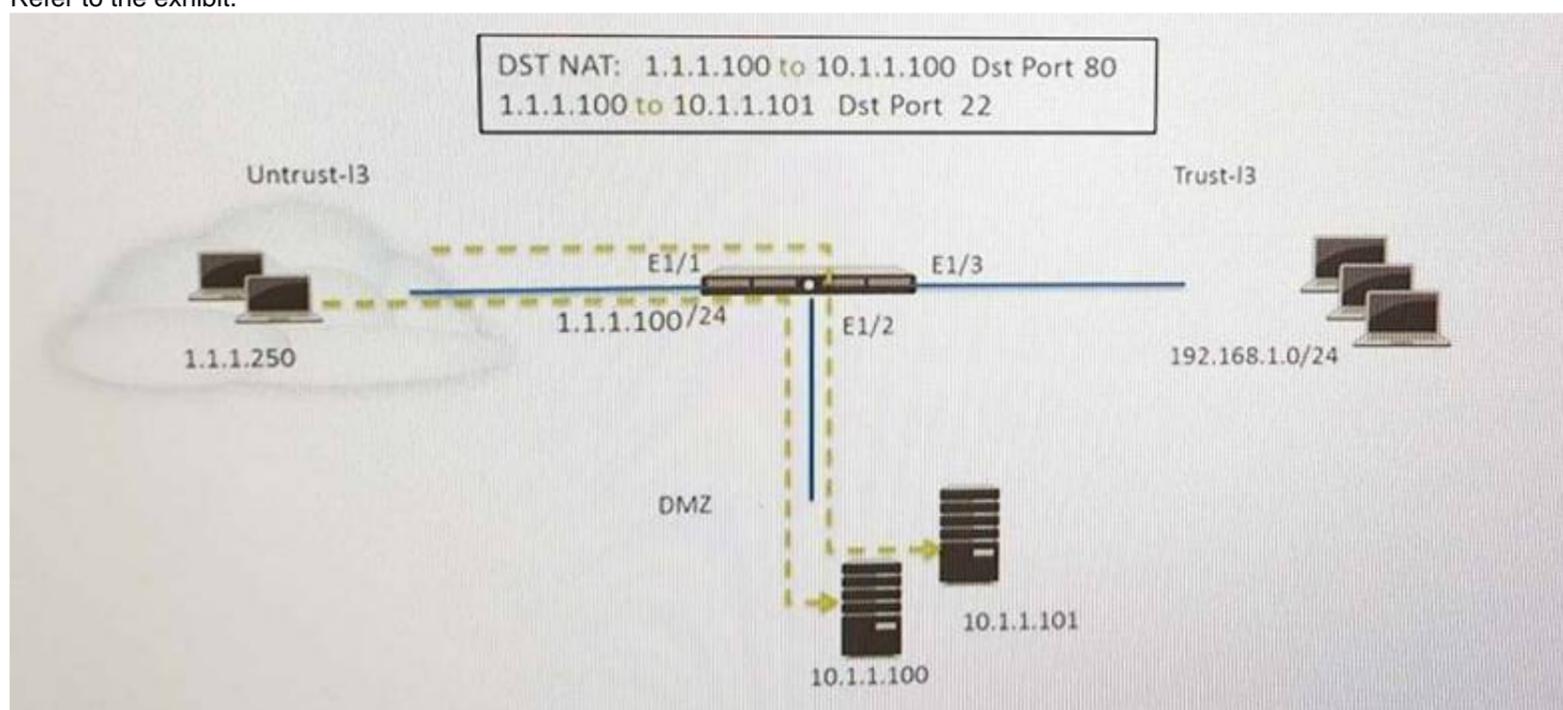

An administrator is using DNAT to map two servers to a single public IP address. Traffic will be steered to the specific server based on the application, where Host A (10.1.1.100) received HTTP traffic and host B(10.1.1.101) receives SSH traffic. Which two security policy rules will accomplish this configuration? (Choose two)

- A. Untrust (Any) to Untrust (10.1.1.1) Ssh-Allow
- B. Untrust (Any) to DMZ (1.1.1.100) Ssh-Allow
- C. Untrust (Any) to DMZ (1.1.1.100) Web-browsing -Allow
- D. Untrust (Any) to Untrust (10.1.1.1) Web-browsing -Allow

Answer: CD

NEW QUESTION 158

Which operation will impact the performance of the management plane?

- A. WildFire Submissions
- B. DoS Protection
- C. decrypting SSL Sessions
- D. Generating a SaaS Application Report.

Answer: C

NEW QUESTION 163

Which User-ID method maps IP address to usernames for users connecting through a web proxy that has already authenticated the user?

- A. Client Probing
- B. Port mapping
- C. Server monitoring
- D. Syslog listening

Answer: D

NEW QUESTION 168

An administrator just submitted a newly found piece of spyware for WildFire analysis. The spyware passively monitors behavior without the user's knowledge. What is the expected verdict from WildFire?

- A. Gray ware
- B. Malware
- C. Spyware
- D. Phishing

Answer: A

NEW QUESTION 170

Which two settings can be configured only locally on the firewall and not pushed from a Panorama template or template stack? (Choose two)

- A. HA1 IP Address
- B. Network Interface Type
- C. Master Key
- D. Zone Protection Profile

Answer: AB

NEW QUESTION 174

A network engineer has revived a report of problems reaching 98.139.183.24 through vr1 on the firewall. The routing table on this firewall is extensive and complex.

Which CLI command will help identify the issue?

- A. test routing fib virtual-router vr1
- B. show routing route type static destination 98.139.183.24
- C. test routing fib-lookup ip 98.139.183.24 virtual-router vr1
- D. show routing interface

Answer: C

NEW QUESTION 178

A network Administrator needs to view the default action for a specific spyware signature. The administrator follows the tabs and menus through Objects> Security Profiles> Anti-Spyware and select default profile.

What should be done next?

- A. Click the simple-critical rule and then click the Action drop-down list.
- B. Click the Exceptions tab and then click show all signatures.
- C. View the default actions displayed in the Action column.
- D. Click the Rules tab and then look for rules with "default" in the Action column.

Answer: B

NEW QUESTION 182


Which two statements are correct for the out-of-box configuration for Palo Alto Networks NGFWs? (Choose two)

- A. The devices are pre-configured with a virtual wire pair out the first two interfaces.
- B. The devices are licensed and ready for deployment.
- C. The management interface has an IP address of 192.168.1.1 and allows SSH and HTTPS connections.
- D. A default bidirectional rule is configured that allows Untrust zone traffic to go to the Trust zone.
- E. The interface are pingable.

Answer: BC

NEW QUESTION 187

Click the Exhibit button

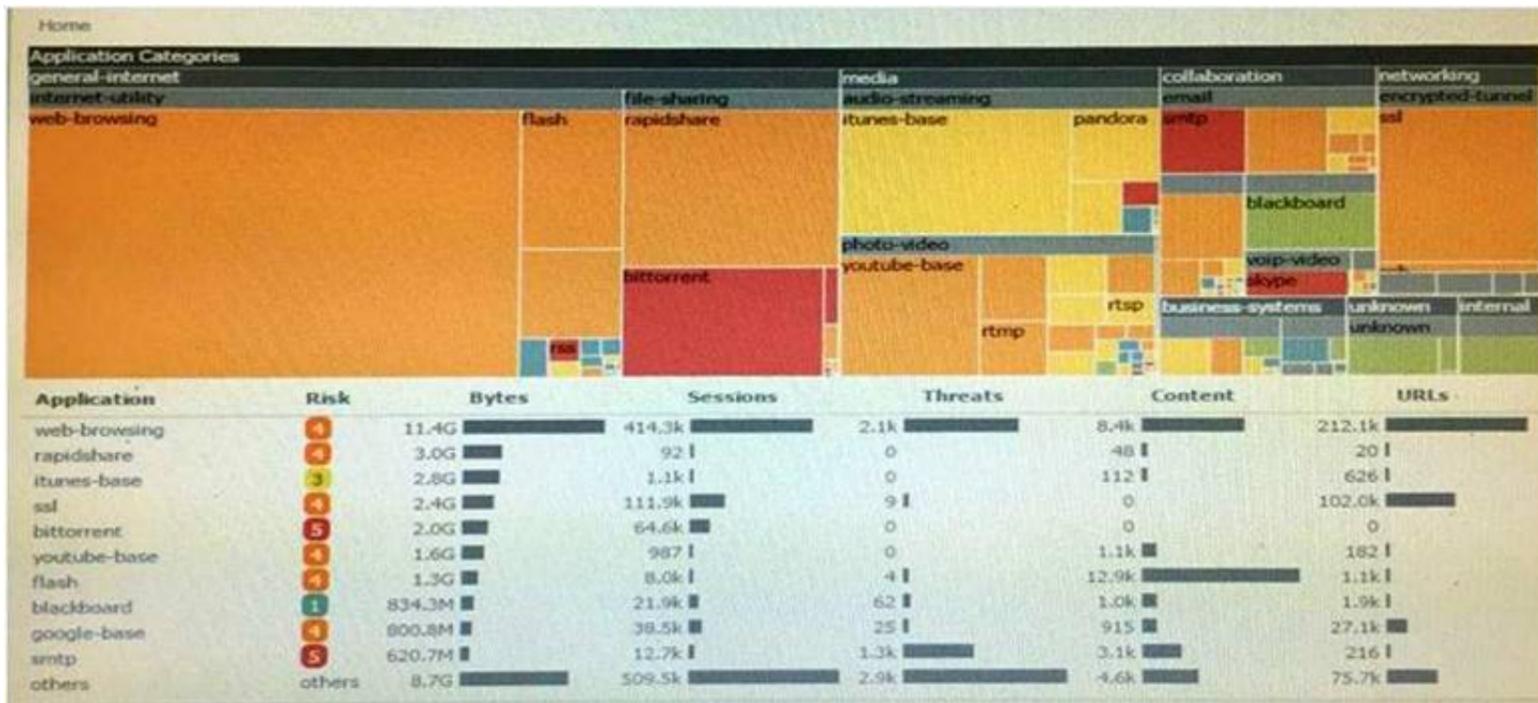

An administrator has noticed a large increase in bittorrent activity. The administrator wants to determine where the traffic is going on the company. What would be the administrator's next step?

- A. Right-Click on the bittorrent link and select Value from the context menu
- B. Create a global filter for bittorrent traffic and then view Traffic logs.
- C. Create local filter for bittorrent traffic and then view Traffic logs.
- D. Click on the bittorrent application link to view network activity

Answer: D

NEW QUESTION 192

Which command can be used to validate a Captive Portal policy?

- A. eval captive-portal policy <criteria>
- B. request cp-policy-eval <criteria>
- C. test cp-policy-match <criteria>
- D. debug cp-policy <criteria>

Answer: C

NEW QUESTION 196

What are three valid actions in a File Blocking Profile? (Choose three)

- A. Forward
- B. Block
- C. Alert
- D. Upload
- E. Reset-both
- F. Continue

Answer: ABC

Explanation:

<https://live.paloaltonetworks.com/t5/Configuration-Articles/File-Blocking-Rulebase-and-Action-Precedence/ta-p/53623> "https://live.paloaltonetworks.com/t5/Configuration-Articles/File-Blocking-Rulebase-and-Action-Precedence/ta-p/53623"les/File-Blocking-RulebHYPERLINK "https://live.paloaltonetworks.com/t5/Configuration-Articles/File-Blocking-Rulebase-and-Action-Precedence/ta-p/53623"ase-and-Action-Precedence/ta-p/53623

NEW QUESTION 201

Which setting allow a DOS protection profile to limit the maximum concurrent sessions from a source IP address?

- A. Set the type to Aggregate, clear the session's box and set the Maximum concurrent Sessions to 4000.
- B. Set the type to Classified, clear the session's box and set the Maximum concurrent Sessions to 4000.
- C. Set the type Classified, check the Sessions box and set the Maximum concurrent Sessions to 4000.
- D. Set the type to aggregate, check the Sessions box and set the Maximum concurrent Sessions to 4000.

Answer: C

NEW QUESTION 205

Which Public Key infrastructure component is used to authenticate users for GlobalProtect when the Connect Method is set to pre-logout?

- A. Certificate revocation list
- B. Trusted root certificate
- C. Machine certificate
- D. Online Certificate Status Protocol

Answer: C

NEW QUESTION 206

A Palo Alto Networks firewall is being targeted by an NTP Amplification attack and is being flooded with tens thousands of bogus UDP connections per second to a single destination IP address and port.

Which option when enabled with the correction threshold would mitigate this attack without dropping legitimate traffic to other hosts inside the network?

- A. Zone Protection Policy with UDP Flood Protection
- B. QoS Policy to throttle traffic below maximum limit
- C. Security Policy rule to deny traffic to the IP address and port that is under attack
- D. Classified DoS Protection Policy using destination IP only with a Protect action

Answer: D

NEW QUESTION 207

A firewall administrator has completed most of the steps required to provision a standalone Palo Alto Networks Next-Generation Firewall. As a final step, the administrator wants to test one of the security policies.

Which CLI command syntax will display the rule that matches the test?

- A. test security -policy- match source <ip_address> destination <IP_address> destination port <port number> protocol <protocol number>
- B. show security rule source <ip_address> destination <IP_address> destination port <port number> protocol <protocol number>
- C. test security rule source <ip_address> destination <IP_address> destination port <port number> protocol <protocol number>
- D. show security-policy-match source <ip_address> destination <IP_address> destination port <port number> protocol <protocol number>test security-policy-match source

Answer: A

Explanation:

test security-policy-match source <source IP> destination <destination IP> protocol <protocol number>

<https://live.paloaltonetworks.com/t5/Management-Articles/How-to-Test-Which-Security-Policy- Applies-to-a-Traffic-Flow/ta-p/53693>

NEW QUESTION 208

Palo Alto Networks maintains a dynamic database of malicious domains.

Which two Security Platform components use this database to prevent threats? (Choose two)

- A. Brute-force signatures
- B. BrightCloud Url Filtering
- C. PAN-DB URL Filtering
- D. DNS-based command-and-control signatures

Answer: CD

NEW QUESTION 209

A company has a web server behind a Palo Alto Networks next-generation firewall that it wants to make accessible to the public at 1.1.1.1. The company has decided to configure a destination NAT Policy rule.

Given the following zone information:

- DMZ zone: DMZ-L3
- Public zone: Untrust-L3
- Guest zone: Guest-L3
- Web server zone: Trust-L3
- Public IP address (Untrust-L3): 1.1.1.1
- Private IP address (Trust-L3): 192.168.1.50

What should be configured as the destination zone on the Original Packet tab of NAT Policy rule?

- A. Untrust-L3
- B. DMZ-L3
- C. Guest-L3
- D. Trust-L3

Answer: A

NEW QUESTION 213

Company.com has an in-house application that the Palo Alto Networks device doesn't identify correctly. A Threat Management Team member has mentioned that this in-house application is very sensitive and all traffic being identified needs to be inspected by the Content-ID engine.

Which method should company.com use to immediately address this traffic on a Palo Alto Networks device?

- A. Create a custom Application without signatures, then create an Application Override policy that includes the source, Destination, Destination Port/Protocol and Custom Application of the traffic.
- B. Wait until an official Application signature is provided from Palo Alto Networks.
- C. Modify the session timer settings on the closest referenced application to meet the needs of the in-house application
- D. Create a Custom Application with signatures matching unique identifiers of the in-house application traffic

Answer: D

NEW QUESTION 214

What must be used in Security Policy Rule that contain addresses where NAT policy applies?

- A. Pre-NAT addresses and Pre-NAT zones
- B. Post-NAT addresses and Post-Nat zones

- C. Pre-NAT address and Post-Nat zones
- D. Post-Nat addresses and Pre-NAT zones

Answer: C

NEW QUESTION 216

A network security engineer is asked to provide a report on bandwidth usage. Which tab in the ACC provides the information needed to create the report?

- A. Blocked Activity
- B. Bandwidth Activity
- C. Threat Activity
- D. Network Activity

Answer: D

NEW QUESTION 217

Which three function are found on the dataplane of a PA-5050? (Choose three)

- A. Protocol Decoder
- B. Dynamic routing
- C. Management
- D. Network Processing
- E. Signature Match

Answer: BDE

NEW QUESTION 218

A firewall administrator is troubleshooting problems with traffic passing through the Palo Alto Networks firewall. Which method shows the global counters associated with the traffic after configuring the appropriate packet filters?

- A. From the CLI, issue the show counter global filter pcap yes command.
- B. From the CLI, issue the show counter global filter packet-filter yes command.
- C. From the GUI, select show global counters under the monitor tab.
- D. From the CLI, issue the show counter interface command for the ingress interface.

Answer: B

NEW QUESTION 219

The GlobalProtect Portal interface and IP address have been configured. Which other value needs to be defined to complete the network settings configuration of GlobalProtect Portal?

- A. Server Certificate
- B. Client Certificate
- C. Authentication Profile
- D. Certificate Profile

Answer: A

Explanation:

(<https://live.paloaltonetworks.com/t5/Configuration-Articles/How-to-Configure-GlobalProtect/ta-p/58351>)

NEW QUESTION 223

A company has a policy that denies all applications it classifies as bad and permits only application it classifies as good. The firewall administrator created the following security policy on the company's firewall.

	Source				Destination				Action	Profile	Options
	Name	Zone	Address	User	Zone	Address	Application	Service			
1	rule1	Trust-L3	any	any	UnTrust-L3	any	Known Good	application-allow	deny	none	
2	rule2	Trust-L3	any	any	UnTrust-L3	any	Known Bad	any	deny	none	
3	rule3	Trust-L3	any	any	UnTrust-L3	any	any	any	deny	none	

Which interface configuration will accept specific VLAN IDs?
 Which two benefits are gained from having both rule 2 and rule 3 presents? (choose two)

- A. A report can be created that identifies unclassified traffic on the network.
- B. Different security profiles can be applied to traffic matching rules 2 and 3.
- C. Rule 2 and 3 apply to traffic on different ports.
- D. Separate Log Forwarding profiles can be applied to rules 2 and 3.

Answer: BD

NEW QUESTION 225

Which two interface types can be used when configuring GlobalProtect Portal?(Choose two)

- A. Virtual Wire
- B. Loopback

- C. Layer 3
- D. Tunnel

Answer: BC

NEW QUESTION 230

Support for which authentication method was added in PAN-OS 8.0?

- A. RADIUS
- B. LDAP
- C. Diameter
- D. TACACS+

Answer: D

Explanation:

<https://www.paloaltonetworks.com/resources/datasheets/whats-new-in-pan-os-7-1>

NEW QUESTION 234

A company.com wants to enable Application Override. Given the following screenshot:



Which two statements are true if Source and Destination traffic match the Application Override policy? (Choose two)

- A. Traffic that matches "rtp-base" will bypass the App-ID and Content-ID engines.
- B. Traffic will be forced to operate over UDP Port 16384.
- C. Traffic utilizing UDP Port 16384 will now be identified as "rtp-base".
- D. Traffic utilizing UDP Port 16384 will bypass the App-ID and Content-ID engines.

Answer: AC

NEW QUESTION 235

A network design calls for a "router on a stick" implementation with a PA-5060 performing inter- VLAN routing All VLAN-tagged traffic will be forwarded to the PA-5060 through a single dot1q trunk interface
 Which interface type and configuration setting will support this design?

- A. Trunk interface type with specified tag
- B. Layer 3 interface type with specified tag
- C. Layer 2 interface type with a VLAN assigned
- D. Layer 3 subinterface type with specified tag

Answer: D

NEW QUESTION 239

Which option is an IPv6 routing protocol?

- A. RIPv3
- B. OSPFv3
- C. OSPv3
- D. BGP NG

Answer: B

NEW QUESTION 241

Several offices are connected with VPNs using static IPv4 routes. An administrator has been tasked with implementing OSPF to replace static routing.
 Which step is required to accomplish this goal?

- A. Assign an IP address on each tunnel interface at each site
- B. Enable OSPFv3 on each tunnel interface and use Area ID 0.0.0.0
- C. Assign OSPF Area ID 0.0.0.0 to all Ethernet and tunnel interfaces
- D. Create new VPN zones at each site to terminate each VPN connection

Answer: C

NEW QUESTION 245

When is it necessary to activate a license when provisioning a new Palo Alto Networks firewall?

- A. When configuring Certificate Profiles
- B. When configuring GlobalProtect portal
- C. When configuring User Activity Reports
- D. When configuring Antivirus Dynamic Updates

Answer: D

NEW QUESTION 246

Which authentication source requires the installation of Palo Alto Networks software, other than PAN-OS 7x, to obtain a username-to-IP-address mapping?

- A. Microsoft Active Directory
- B. Microsoft Terminal Services
- C. Aerohive Wireless Access Point
- D. Palo Alto Networks Captive Portal

Answer: B

NEW QUESTION 251

A network design change requires an existing firewall to start accessing Palo Alto Updates from a data plane interface address instead of the management interface.

Which configuration setting needs to be modified?

- A. Service route
- B. Default route
- C. Management profile
- D. Authentication profile

Answer: A

NEW QUESTION 254

Several offices are connected with VPNs using static IPV4 routes. An administrator has been tasked with implementing OSPF to replace static routing. Which step is required to accomplish this goal?

- A. Assign an IP address on each tunnel interface at each site
- B. Enable OSPFv3 on each tunnel interface and use Area ID 0.0.0.0
- C. Assign OSPF Area ID 0.0.0.0 to all Ethernet and tunnel interfaces
- D. Create new VPN zones at each site to terminate each VPN connection

Answer: C

NEW QUESTION 255

A network security engineer needs to configure a virtual router using IPv6 addresses. Which two routing options support these addresses? (Choose two)

- A. BGP not sure
- B. OSPFv3
- C. RIP
- D. Static Route

Answer: BD

Explanation:

<https://live.paloaltonetworks.com/t5/Management-Articles/Does-PAN-OS-Support-Dynamic-Routing-Protocols-OSPF-or-BGP-with/ta-p/62773>

NEW QUESTION 259

When a malware-infected host attempts to resolve a known command-and-control server, the traffic matches a security policy with DNS sinkhole enabled, generating a traffic log.

What will be the destination IP Address in that log entry?

- A. The IP Address of sinkhole.paloaltonetworks.com
- B. The IP Address of the command-and-control server
- C. The IP Address specified in the sinkhole configuration
- D. The IP Address of one of the external DNS servers identified in the anti-spyware database

Answer: C

Explanation:

<https://live.paloaltonetworks.com/t5/Management-Articles/How-to-Verify-DNS-Sinkhole-Function-is-Working/ta-p/65864>naHYPERLINK "https://live.paloaltonetworks.com/t5/Management-Articles/How-to-Verify-DNS-Sinkhole-Function-is-Working/ta-p/65864"gement-Articles/How-to-Verify-DNS-Sinkhole-Function-is-Working/ta-p/65864

NEW QUESTION 260

In an enterprise deployment, a network security engineer wants to assign to a group of administrators without creating local administrator accounts on the firewall. Which authentication method must be used?

- A. LDAP
- B. Kerberos
- C. Certification based authentication
- D. RADIUS with Vendor-Specific Attributes

Answer: D

NEW QUESTION 262

Which Device Group option is assigned by default in Panorama whenever a new device group is created to manage a Firewall?

- A. Master
- B. Universal
- C. Shared
- D. Global

Answer: C

NEW QUESTION 266

A distributed log collection deployment has dedicated log Collectors. A developer needs a device to send logs to Panorama instead of sending logs to the Collector Group.

What should be done first?

- A. Remove the cable from the management interface, reload the log Collector and then re-connect that cable
- B. Contact Palo Alto Networks Support team to enter kernel mode commands to allow adjustments
- C. remove the device from the Collector Group
- D. Revert to a previous configuration

Answer: C

NEW QUESTION 268

Which two virtualized environments support Active/Active High Availability (HA) in PAN-OS 8.0? (Choose two.)

- A. KVM
- B. VMware ESX
- C. VMware NSX
- D. AWS

Answer: AB

NEW QUESTION 271

Which field is optional when creating a new Security Policy rule?

- A. Name
- B. Description
- C. Source Zone
- D. Destination Zone
- E. Action

Answer: B

NEW QUESTION 274

An administrator is configuring an IPsec VPN to a Cisco ASA at the administrator's home and experiencing issues completing the connection. the following is the output from the command:

```
less mp-log ikemgr.log:
2014-08-05 03:51:41 [INFO]: IPsec-SA request for 108.81.64.59 queued since no phase1 found
2014-08-05 03:51:41 [PROTO_NOTIFY]: ===== PHASE-1 NEGOTIATION STARTED AS INITIATOR, MAIN MODE =====
===== Initiated SA: 69.15.96.53[500]-108.81.64.59[500] cookie:09e85260f28f4e15:0000000000000000 =====
2014-08-05 03:52:33 [PROTO_NOTIFY]: ===== PHASE-1 NEGOTIATION FAILED AS INITIATOR, MAIN MODE =====
===== Failed SA: 69.15.96.53[500]-108.81.64.59[500] cookie:09e85260f28f4e15:0000000000000000 ===== Due to
timeout.
2014-08-05 03:52:33 [INFO]: ===== PHASE-1 SA DELETED =====
===== Deleted SA: 69.15.96.53[500]-108.81.64.59[500] cookie:09e85260f28f4e15:0000000000000000 =====
2014-08-05 03:53:02 [INFO]: IPsec-SA request for 108.81.64.59 queued since no phase1 found
2014-08-05 03:53:02 [PROTO_NOTIFY]: ===== PHASE-1 NEGOTIATION STARTED AS INITIATOR, MAIN MODE =====
===== Initiated SA: 69.15.96.53[500]-108.81.64.59[500] cookie:33351420a9a1aa47:0000000000000000 =====
2014-08-05 03:53:54 [PROTO_NOTIFY]: ===== PHASE-1 NEGOTIATION FAILED AS INITIATOR, MAIN MODE =====
===== Failed SA: 69.15.96.53[500]-108.81.64.59[500] cookie:33351420a9a1aa47:0000000000000000 ===== Due to
timeout.
2014-08-05 03:53:54 [INFO]: ===== PHASE-1 SA DELETED =====
```

What could be the cause of this problem?

- A. The dead peer detection settings do not match between the Palo Alto Networks Firewall and the ASA.
- B. The Proxy IDs on the Palo Alto Networks Firewall do not match the setting on the ASA.
- C. The public IP addresses do not match for both the Palo Alto Networks Firewall and the ASA.
- D. The shared secrets do not match between the Palo Alto Networks Firewall and the ASA.

Answer: C

NEW QUESTION 276

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

PCNSE Practice Exam Features:

- * PCNSE Questions and Answers Updated Frequently
- * PCNSE Practice Questions Verified by Expert Senior Certified Staff
- * PCNSE Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * PCNSE Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The PCNSE Practice Test Here](#)