

Amazon

Exam Questions AWS-SysOps

Amazon AWS Certified SysOps Administrator - Associate



NEW QUESTION 1

- (Exam Topic 2)

A webpage is stored in an Amazon S3 bucket behind an Application Load Balancer (ALB). Configure the S3 bucket to serve a static error page in the event of a failure at the primary site.

* 1. Use the us-east-2 Region for all resources.

* 2. Unless specified below, use the default configuration settings.

* 3. There is an existing hosted zone named lab

751906329398-26023898.com that contains an A record with a simple routing policy that routes traffic to an existing ALB.

* 4. Configure the existing S3 bucket named lab-751906329398-26023898.com as a static hosted website using the object named index.html as the index document

* 5. For the index.html object, configure the S3 ACL to allow for public read access. Ensure public access to the S3 bucket is allowed.

* 6. In Amazon Route 53, change the A record for domain lab-751906329398-26023898.com to a primary record for a failover routing policy. Configure the record so that it evaluates the health of the ALB to determine failover.

* 7. Create a new secondary failover alias record for the domain lab-751906329398-26023898.com that routes traffic to the existing S3 bucket.

A. Mastered

B. Not Mastered

Answer: A

Explanation:

Here are the steps to configure an Amazon S3 bucket to serve a static error page in the event of a failure at the primary site:

- Log in to the AWS Management Console and navigate to the S3 service in the us-east-2 Region.
- Find the existing S3 bucket named lab-751906329398-26023898.com and click on it.
- In the "Properties" tab, click on "Static website hosting" and select "Use this bucket to host a website".
- In "Index Document" field, enter the name of the object that you want to use as the index document, in this case, "index.html"
- In the "Permissions" tab, click on "Block Public Access", and make sure that "Block all public access" is turned OFF.
- Click on "Bucket Policy" and add the following policy to allow public read access:

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "PublicReadGetObject", "Effect": "Allow",
      "Principal": "*", "Action": "s3:GetObject",
      "Resource": "arn:aws:s3:::lab-751906329398-26023898.com/*"
    }
  ]
}
```


- Now navigate to the Amazon Route 53 service, and find the existing hosted zone named lab-751906329398-26023898.com.
- Click on the "A record" and update the routing policy to "Primary - Failover" and add the existing ALB as the primary record.
- Click on "Create Record" button and create a new secondary failover alias record for the domain lab-751906329398-26023898.com that routes traffic to the existing S3 bucket.

➤ Now, when the primary site (ALB) goes down, traffic will be automatically routed to the S3 bucket serving the static error page.

Note:

- You can use CloudWatch to monitor the health of your ALB.
- You can use Amazon S3 to host a static website.
- You can use Amazon Route 53 for routing traffic to different resources based on health checks.
- You can refer to the AWS documentation for more information on how to configure and use these services:
- <https://aws.amazon.com/s3/>
- <https://aws.amazon.com/route53/>
- <https://aws.amazon.com/cloudwatch/>

Recently visited Info




No recently visited services

Explore one of these commonly visited AWS services.

IAM
EC2
S3
RDS
Lambda


View all services

Welcome to AWS




Getting started with AWS

Learn the fundamentals and find valuable information to get the most out of AWS.




Training and certification

Learn from AWS experts and advance your skills and knowledge.



What's new with AWS?

AWS Health Info



No health data

This could be because you don't have permissions to access AWS Health. Please contact your account administrator.

aws

Services

Search for services, features, blogs, docs, and more [Alt+S]

Global

LabUserRole/LabUserod26023898 @ 7519-0632-9398

Amazon S3

Buckets

Access Points

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

Access analyzer for S3

Block Public Access settings for this account

Storage Lens

Dashboards

AWS Organizations settings

Feature spotlight

AWS Marketplace for S3

We're continuing to improve the S3 console to make it faster and easier to use. If you have feedback on the updated experience, choose [Provide feedback](#).

Amazon S3 > Buckets

Account snapshot

Last updated: Apr 20, 2022 by Storage Lens. Metrics are generated every 24 hours. [Learn more](#)

View Storage Lens dashboard

Total storage

Object count

Avg. object size

You can enable advanced metrics in the "default-account-dashboard" configuration.

Buckets (1) Info

Buckets are containers for data stored in S3. [Learn more](#)

Refresh

Copy ARN

Empty

Delete

Create bucket

Find buckets by name

Name

AWS Region

Access

Creation date

lab-751906329398-26023898.com

US East (Ohio) us-east-2


Bucket and objects not public

September 30, 2022, 0


Graphical user interface, text, application Description automatically generated

Passing Certification Exams Made Easy


visit - <https://www.surepassexam.com>

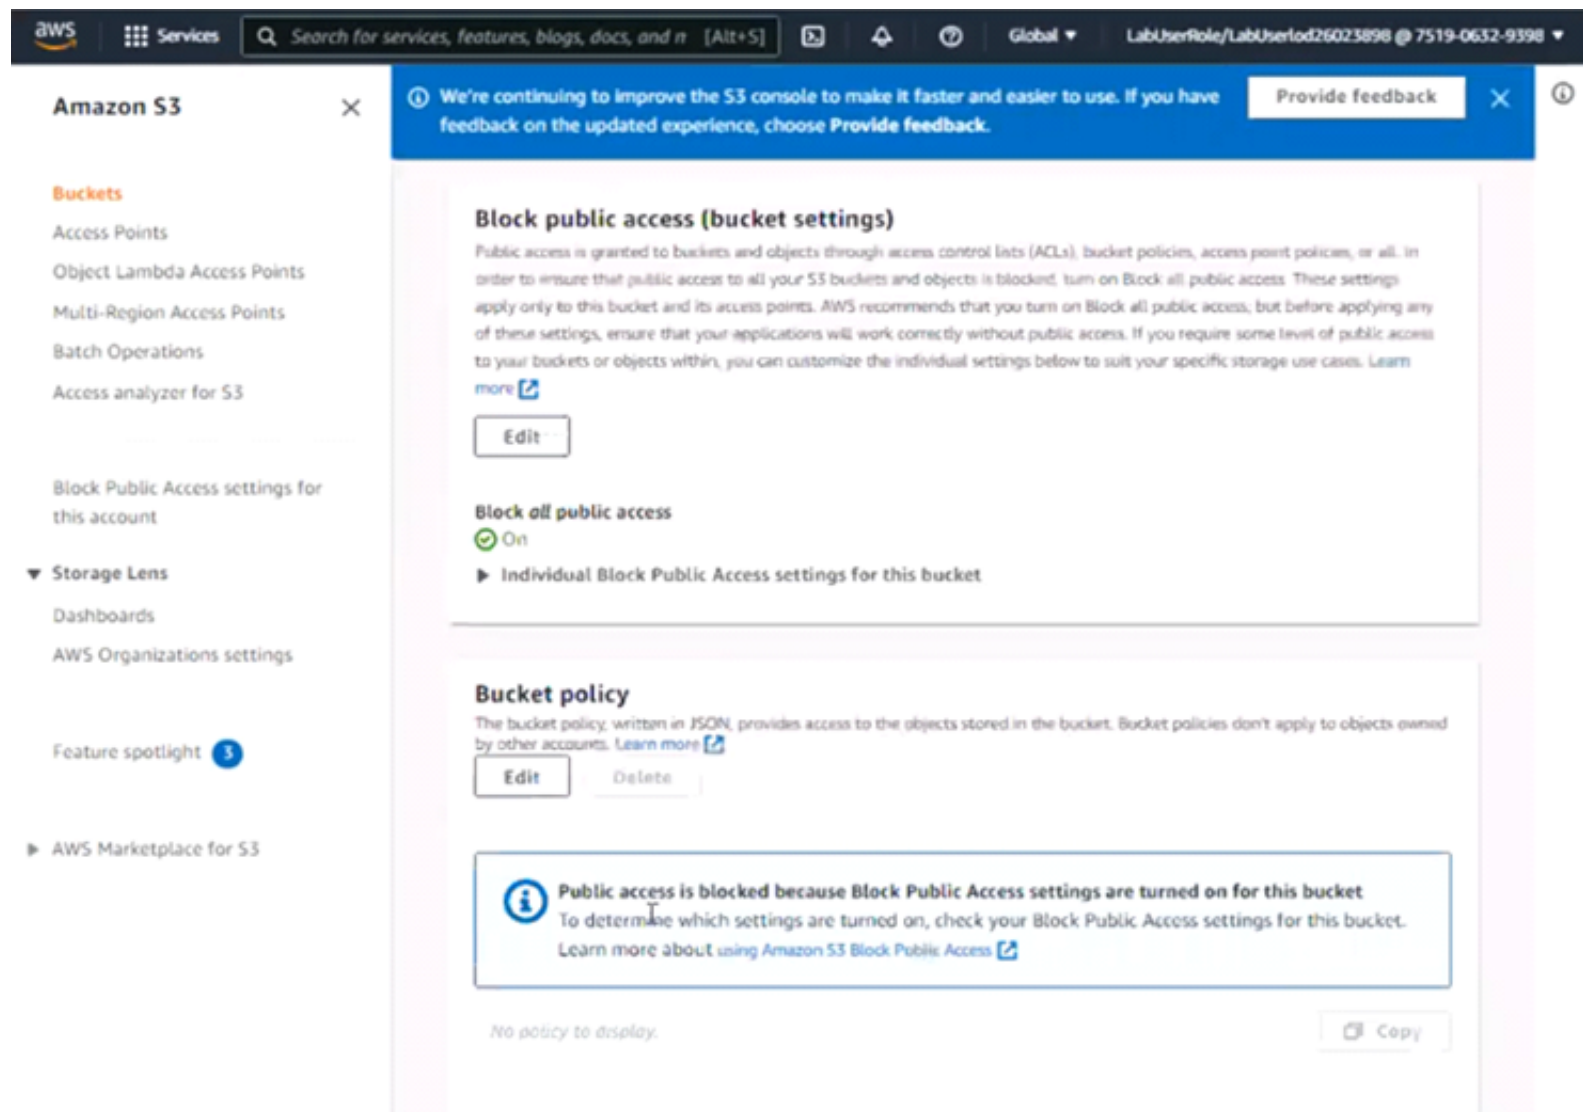


Graphical user interface, application, Teams Description automatically generated

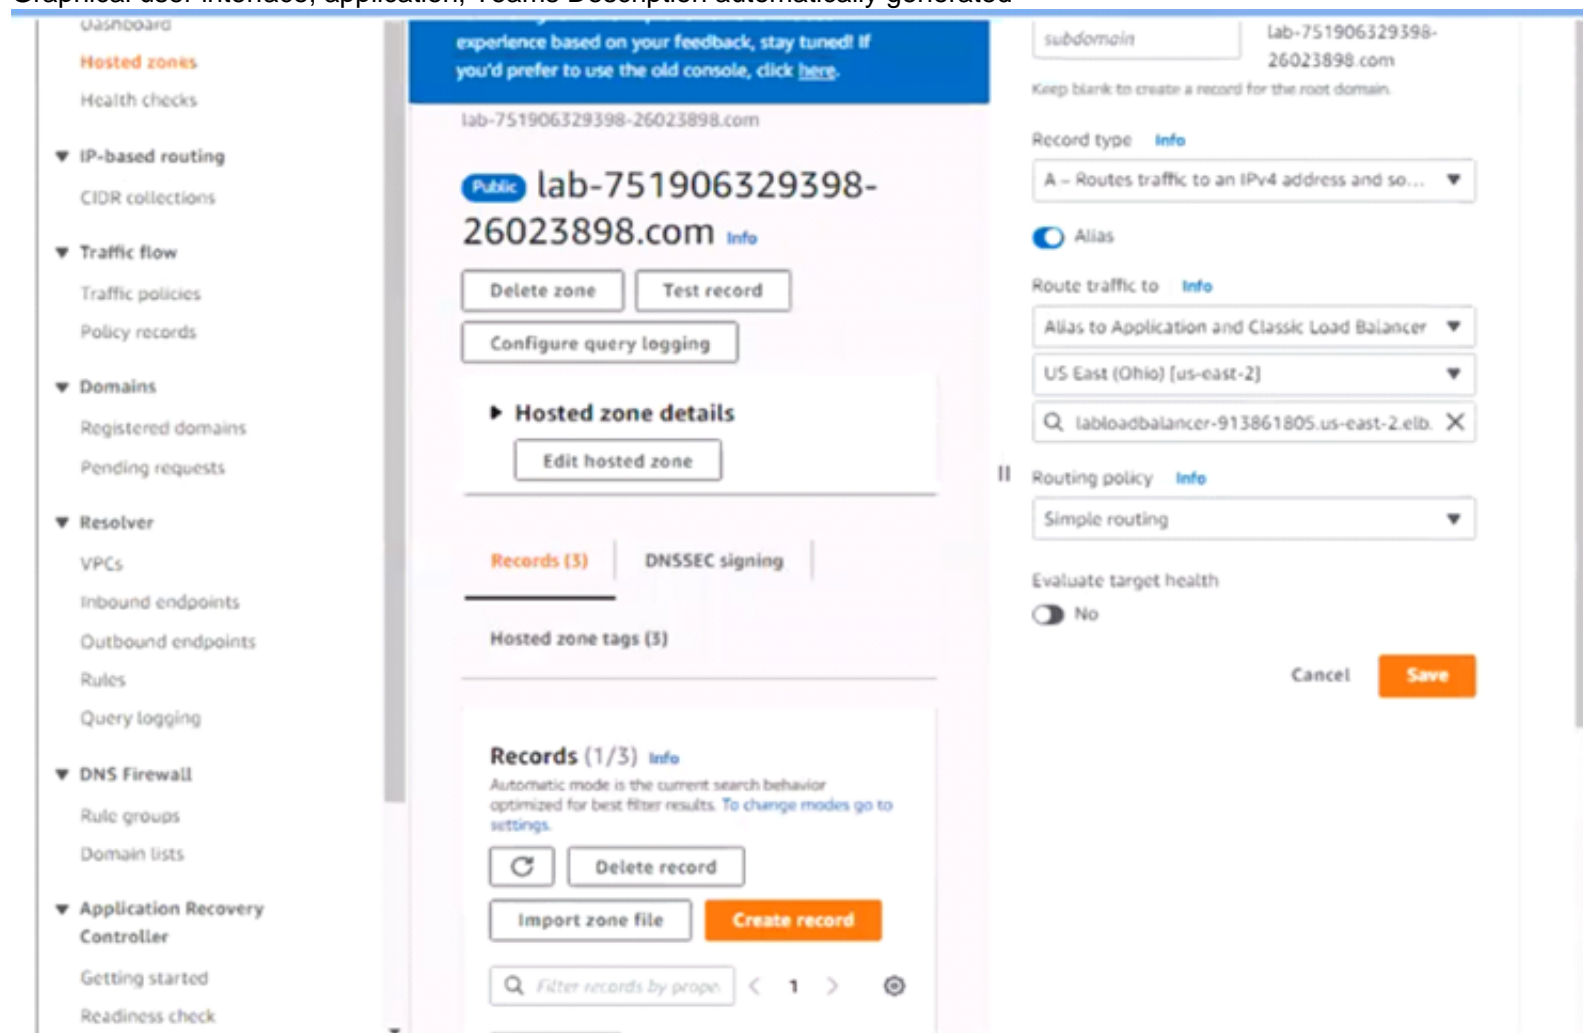

Graphical user interface, text, application Description automatically generated

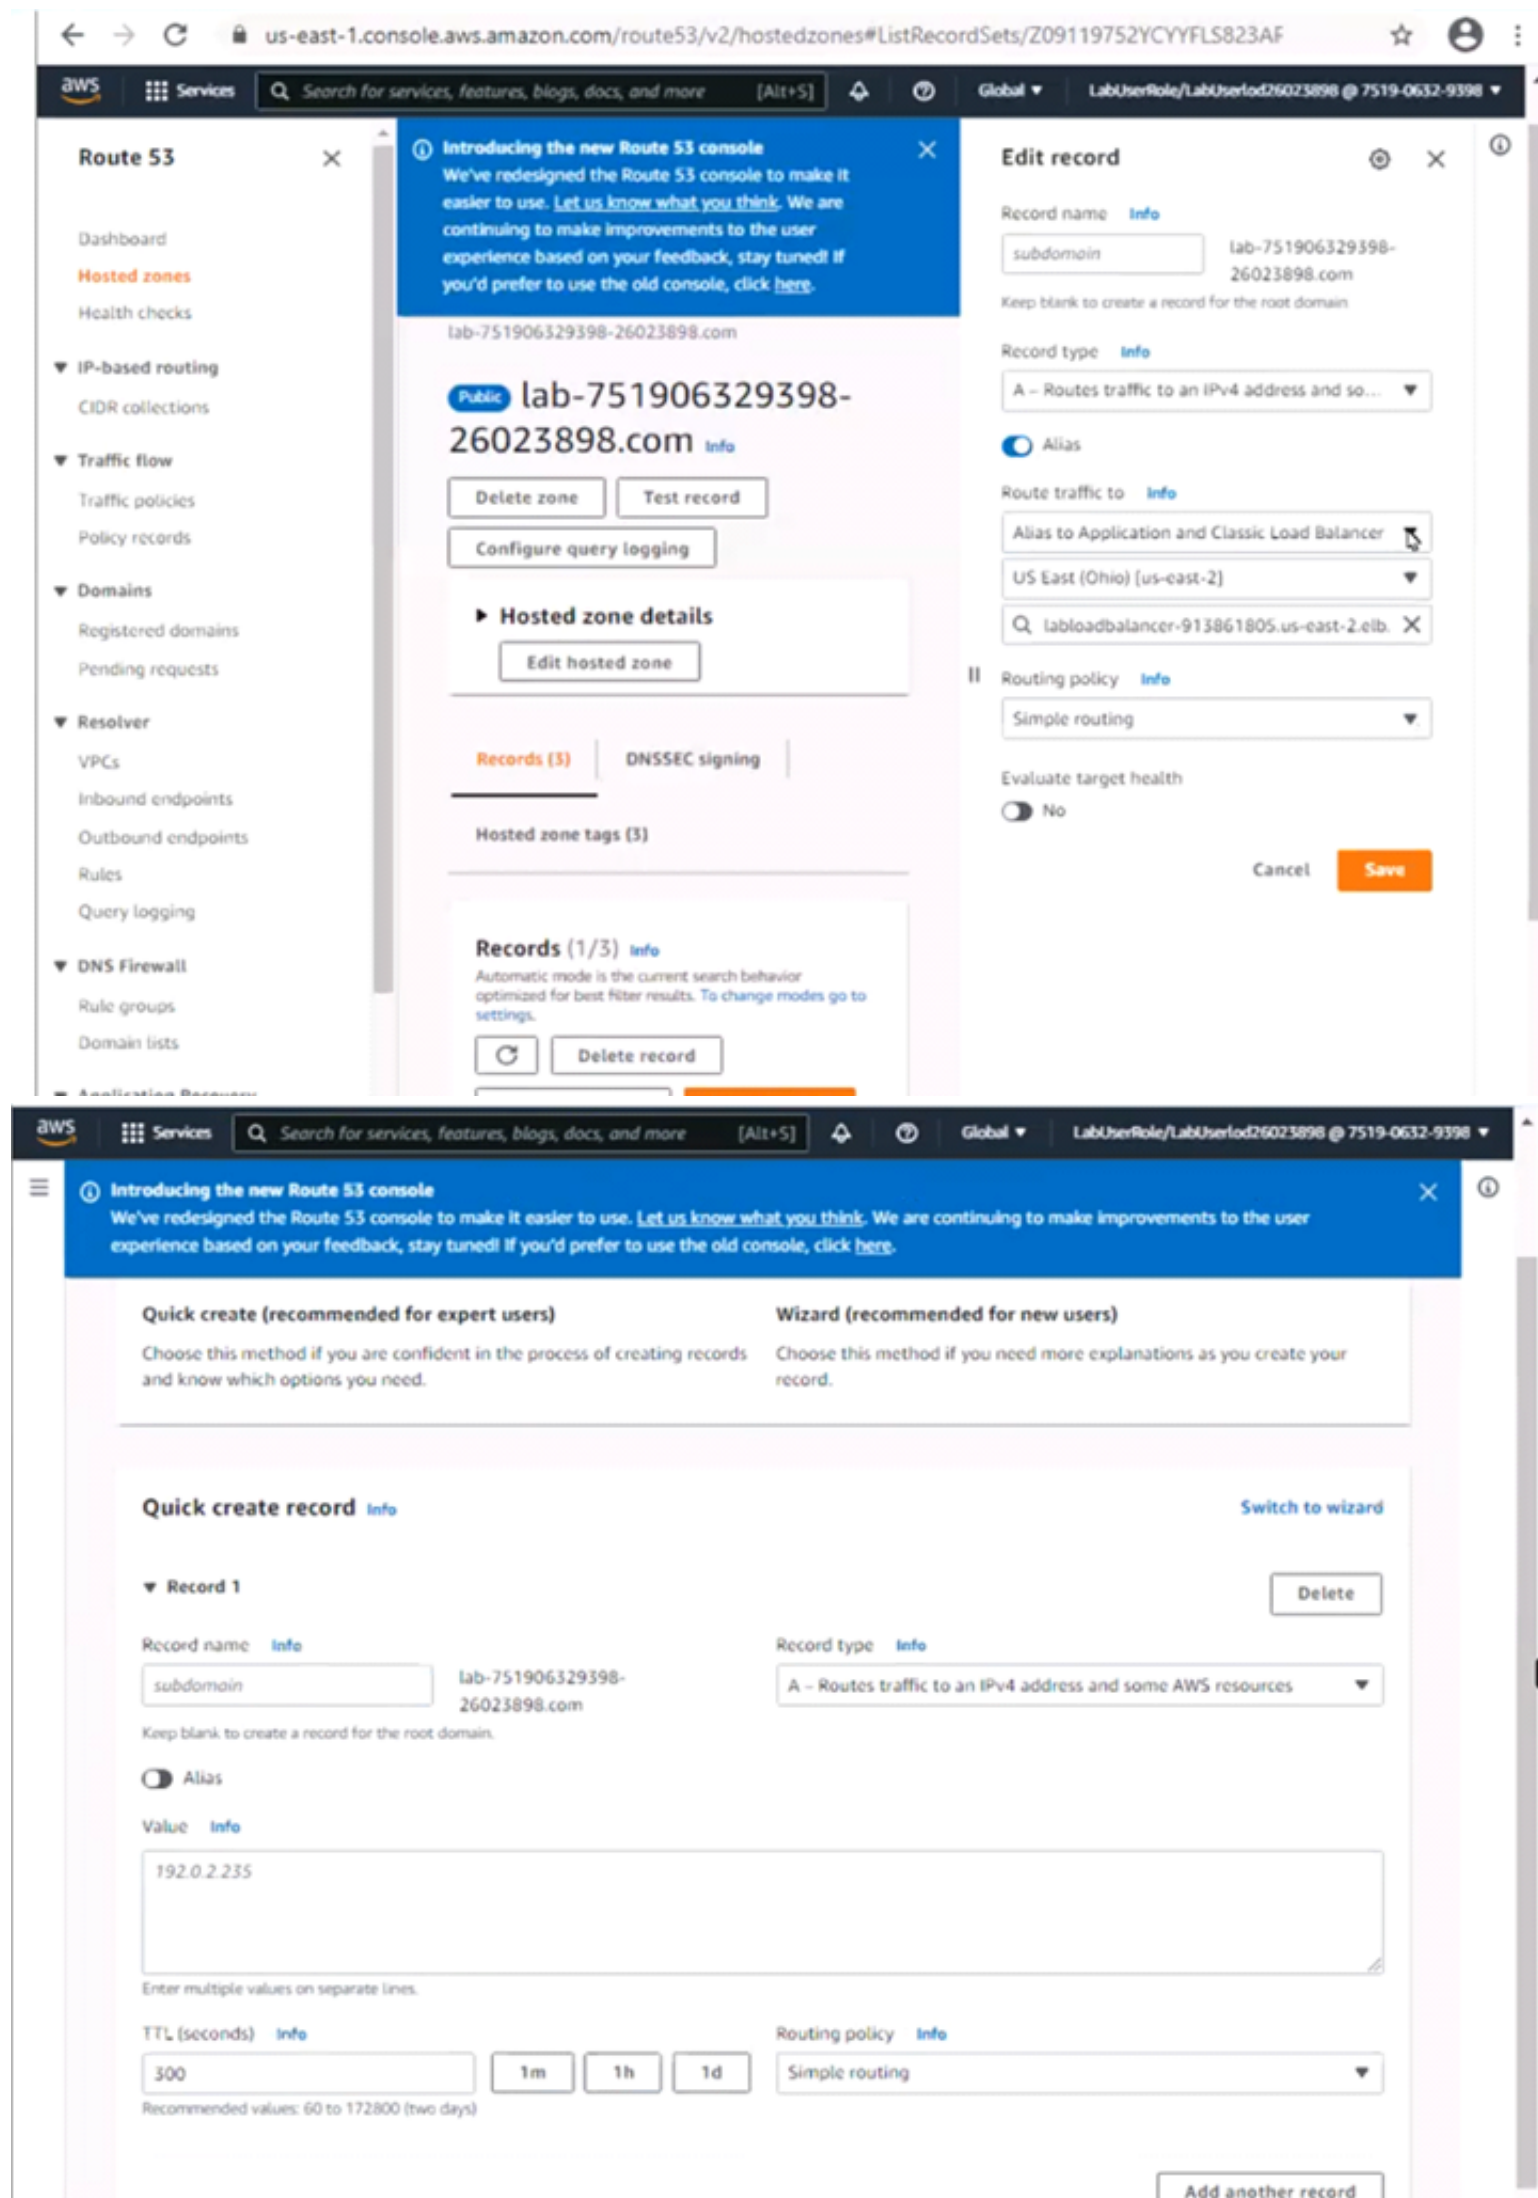

Graphical user interface, text, application, email Description automatically generated

 Services

Search for services, features, blogs, docs, and more

[Alt+S]

Global

LabUserRole/LabUserIod26023898 @ 7519-0632-9398

Introducing the new Route 53 console

We've redesigned the Route 53 console to make it easier to use. [Let us know what you think](#). We are continuing to make improvements to the user experience based on your feedback, stay tuned! If you'd prefer to use the old console, click [here](#).

subdomain

lab-751906329398-26023898.com

A – Routes traffic to an IPv4 address and some AWS resources ...

Keep blank to create a record for the root domain.

Alias

Value

Info

192.0.2.235

Enter multiple values on separate lines.

TTL (seconds)

Info

300

1m

1h

1d

Routing policy

Info

Simple routing

Recommended values: 60 to 172800 (two days)

Add another record

Cancel

Create records

► View existing records

The following table lists the existing records in lab-751906329398-26023898.com.

Graphical user interface, text, application Description automatically generated

Quick create record

Info

Switch to wizard

▼ Record 1

Delete

Record name

Info

subdomain

lab-751906329398-26023898.com

Record type

Info

A – Routes traffic to an IPv4 address and some AWS resources

Keep blank to create a record for the root domain.

Alias

Route traffic to

Info

Alias to another record in this hosted zone

US East (N. Virginia)

An alias to a CloudFront distribution and another record in the same hosted zone are global and available only in US East (N. Virginia).

lab-751906329398-26023898.com.

X

Alias hosted zone ID: Z09119752YCYFLS823AF

Routing policy

Info

Failover

Failover record type

Secondary

Health check ID - optional

Info

Choose health check

Evaluate target health

Yes

Record ID

Info

US West load balancer

Add another record

Passing Certification Exams Made Easy

visit - <https://www.surepassexam.com>

When you create records that have a routing policy other than simple, enter a value that uniquely identifies each record that has the same name and type. For example, you might assign a date/time stamp or a sequential counter.

[Learn more](#)

[Working with records](#)

- (Exam Topic 1)

The company needs to reduce the cost of the EC2 instances. The company is willing to make a 1-year commitment that will begin next week. The company must choose an EC2 Instance purchasing option that will provide discounts for the 90 EC2 Instances regardless of Region during the 1-year period. Which solution will meet these requirements?

- A. Purchase EC2 Standard Reserved Instances.
- B. Purchase an EC2 Instance Savings Plan.
- C. Purchase EC2 Convertible Reserved Instances.
- D. Purchase a Compute Savings Plan.

Answer: B

NEW QUESTION 3

- (Exam Topic 1)

A SysOps administrator needs to give users the ability to upload objects to an Amazon S3 bucket. The SysOps administrator creates a presigned URL and provides the URL to a user, but the user cannot upload an object to the S3 bucket. The presigned URL has not expired, and no bucket policy is applied to the S3 bucket.

Which of the following could be the cause of this problem?

- A. The user has not properly configured the AWS CLI with their access key and secret access key.
- B. The SysOps administrator does not have the necessary permissions to upload the object to the S3 bucket.
- C. The SysOps administrator must apply a bucket policy to the S3 bucket to allow the user to upload the object.
- D. The object already has been uploaded through the use of the presigned URL, so the presigned URL is no longer valid.

Answer: B

NEW QUESTION 4

- (Exam Topic 1)

A SysOps administrator is deploying an application on 10 Amazon EC2 instances. The application must be highly available. The instances must be placed on distinct underlying hardware.

What should the SysOps administrator do to meet these requirements?

- A. Launch the instances into a cluster placement group in a single AWS Region.
- B. Launch the instances into a partition placement group in multiple AWS Regions.
- C. Launch the instances into a spread placement group in multiple AWS Regions.
- D. Launch the instances into a spread placement group in single AWS Region

Answer: D

Explanation:

<https://docs.aws.amazon.com/AWSEC2/latest/UserGuide/placement-groups.html>

NEW QUESTION 5

- (Exam Topic 1)

A SysOps administrator creates an AWS CloudFormation template to define an application stack that can be deployed in multiple AWS Regions.

The SysOps administrator also creates an Amazon CloudWatch dashboard by using the AWS Management Console. Each deployment of the application requires its own CloudWatch dashboard.

How can the SysOps administrator automate the creation of the CloudWatch dashboard each time the application is deployed?

- A. Create a script by using the AWS CLI to run the `aws cloudformation put-dashboard` command with the name of the dashboard
- B. Run the command each time a new CloudFormation stack is created.
- C. Export the existing CloudWatch dashboard as JSON
- D. Update the CloudFormation template to define an `AWS::CloudWatch::Dashboard` resource
- E. Include the exported JSON in the resource's `DashboardBody` property.
- F. Update the CloudFormation template to define a resource
- G. Use the intrinsic `Ref` function to reference the ID of the existing CloudWatch dashboard.
- H. Update the CloudFormation template to define an `AWS::CloudWatch::Dashboard` resource
- I. Specify the name of the existing dashboard in the `DashboardName` property.

Answer: B

Explanation:

You can only use the Intrinsic Ref function to reference a resource that is being created at the same time as the current CloudFormation template. The question states that the CloudWatch dashboard was previously created using the AWS Management Console, so there is no ID to reference the existing CloudWatch dashboard in the CloudFormation template. You would need to export the existing CloudWatch dashboard as JSON, then use the `DashboardBody` property in the CloudFormation template to replicate it upon each deployment

(<https://docs.aws.amazon.com/AmazonCloudWatch/latest/APIReference/CloudWatch-Dashboard-Body-Structu>

NEW QUESTION 6

- (Exam Topic 1)

A SysOps administrator developed a Python script that uses the AWS SDK to conduct several maintenance tasks. The script needs to run automatically every night.

What is the MOST operationally efficient solution that meets this requirement?

- A. Convert the Python script to an AWS Lambda function
- B. Use an Amazon EventBridge (Amazon CloudWatch Events) rule to invoke the function every night.
- C. Convert the Python script to an AWS Lambda function
- D. Use AWS CloudTrail to invoke the function every night.
- E. Deploy the Python script to an Amazon EC2 instance
- F. Use Amazon EventBridge (Amazon CloudWatch Events) to schedule the instance to start and stop every night.
- G. Deploy the Python script to an Amazon EC2 instance
- H. Use AWS Systems Manager to schedule the instance to start and stop every night.

Answer: A

NEW QUESTION 7

- (Exam Topic 1)

An errant process is known to use an entire processor and run at 100% A SysOps administrator wants to automate restarting the instance once the problem occurs for more than 2 minutes

How can this be accomplished?

- A. Create an Amazon CloudWatch alarm for the Amazon EC2 instance with basic monitoring Enable an action to restart the instance
- B. Create a CloudWatch alarm for the EC2 instance with detailed monitoring Enable an action to restart the instance
- C. Create an AWS Lambda function to restart the EC2 instance triggered on a scheduled basis every 2 minutes
- D. Create a Lambda function to restart the EC2 instance, triggered by EC2 health checks

Answer: B

NEW QUESTION 8

- (Exam Topic 1)

A company has an internal web application that runs on Amazon EC2 instances behind an Application Load Balancer. The instances run in an Amazon EC2 Auto Scaling group in a single Availability Zone. A SysOps administrator must make the application highly available.

Which action should the SysOps administrator take to meet this requirement?

- A. Increase the maximum number of instances in the Auto Scaling group to meet the capacity that is required at peak usage.
- B. Increase the minimum number of instances in the Auto Scaling group to meet the capacity that is required at peak usage.
- C. Update the Auto Scaling group to launch new instances in a second Availability Zone in the same AWS Region.
- D. Update the Auto Scaling group to launch new instances in an Availability Zone in a second AWS Region.

Answer: C

Explanation:

"An Auto Scaling group can contain EC2 instances in one or more Availability Zones within the same Region. However, Auto Scaling groups cannot span multiple Regions". As stated in <https://docs.aws.amazon.com/autoscaling/ec2/userguide/auto-scaling-benefits.htm>

NEW QUESTION 9

- (Exam Topic 1)

A company hosts an online shopping portal in the AWS Cloud. The portal provides HTTPS security by using a TLS certificate on an Elastic Load Balancer (ELB). Recently, the portal suffered an outage because the TLS certificate expired. A SysOps administrator must create a solution to automatically renew certificates to avoid this issue in the future.

What is the MOST operationally efficient solution that meets these requirements?

- A. Request a public certificate by using AWS Certificate Manager (ACM). Associate the certificate from ACM with the EL
- B. Write a scheduled AWS Lambda function to renew the certificate every 18 months.
- C. Request a public certificate by using AWS Certificate Manager (ACM). Associate the certificate from ACM with the EL
- D. ACM will automatically manage the renewal of the certificate.
- E. Register a certificate with a third-party certificate authority (CA). Import this certificate into AWS Certificate Manager (ACM). Associate the certificate from ACM with the EL
- F. ACM will automatically manage the renewal of the certificate.
- G. Register a certificate with a third-party certificate authority (CA). Configure the ELB to import the certificate directly from the C
- H. Set the certificate refresh cycle on the ELB to refresh when the certificate is within 3 months of the expiration date.

Answer: B

Explanation:

"A certificate is eligible for automatic renewal subject to the following considerations: ELIGIBLE if associated with another AWS service, such as Elastic Load Balancing or CloudFront. ELIGIBLE if exported since being issued or last renewed. ELIGIBLE if it is a private certificate issued by calling the ACM RequestCertificate API and then exported or associated with another AWS service. ELIGIBLE if it is a private certificate issued through the management console and then exported or associated with another AWS service." <https://docs.aws.amazon.com/acm/latest/userguide/managed-renewal.html>

NEW QUESTION 10

- (Exam Topic 1)

A company uses AWS Organizations. A SysOps administrator wants to use AWS Compute Optimizer and AWS tag policies in the management account to govern all member accounts in the billing family. The SysOps administrator navigates to the AWS Organizations console but cannot activate tag policies through the management account.

What could be the reason for this issue?

- A. All features have not been enabled in the organization.
- B. Consolidated billing has not been enabled.
- C. The member accounts do not have tags enabled for cost allocation.
- D. The member accounts have not manually enabled trusted access for Compute Optimizer.

Answer: C

NEW QUESTION 10

- (Exam Topic 1)

A company hosts a web portal on Amazon EC2 instances. The web portal uses an Elastic Load Balancer (ELB) and Amazon Route 53 for its public DNS service. The ELB and the EC2 instances are deployed by way of a single AWS CloudFormation stack in the us-east-1 Region. The web portal must be highly available across multiple Regions.

Which configuration will meet these requirements?

- A. Deploy a copy of the stack in the us-west-2 Region
- B. Create a single start of authority (SOA) record in Route 53 that includes the IP address from each EL
- C. Configure the SOA record with health check
- D. Use the ELB in us-east-1 as the primary record and the ELB in us-west-2 as the secondary record.
- E. Deploy a copy of the stack in the us-west-2 Region
- F. Create an additional A record in Route 53 that includes the ELB in us-west-2 as an alias target
- G. Configure the A records with a failover routing policy and health check
- H. Use the ELB in us-east-1 as the primary record and the ELB in us-west-2 as the secondary record.
- I. Deploy a new group of EC2 instances in the us-west-2 Region

- J. Associate the new EC2 instances with the existing ELB, and configure load balancer health checks on all EC2 instance
- K. Configure the ELB to update Route 53 when EC2 instances in us-west-2 fail health checks.
- L. Deploy a new group of EC2 instances in the us-west-2 Regio
- M. Configure EC2 health checks on all EC2 instances in each Regio
- N. Configure a peering connection between the VPC
- O. Use the VPC in us-east-1 as the primary record and the VPC in us-west-2 as the secondary record.

Answer: B

Explanation:

When you create a hosted zone, Route 53 automatically creates a name server (NS) record and a start of authority (SOA) record for the zone.
<https://docs.aws.amazon.com/Route53/latest/DeveloperGuide/migrate-dns-domain-in-use.html#migrate-dns-crea>
https://en.wikipedia.org/wiki/SOA_record

NEW QUESTION 15

- (Exam Topic 1)

A company is expanding its fleet of Amazon EC2 instances before an expected increase of traffic. When a SysOps administrator attempts to add more instances, an InstanceLimitExceeded error is returned.
What should the SysOps administrator do to resolve this error?

- A. Add an additional CIDR block to the VPC.
- B. Launch the EC2 instances in a different Availability Zone.
- C. Launch new EC2 instances in another VPC.
- D. Use Service Quotas to request an EC2 quota increase.

Answer: D

NEW QUESTION 17

- (Exam Topic 1)

A SysOps administrator has used AWS CloudFormation to deploy a serverless application into a production VPC. The application consists of an AWS Lambda function, an Amazon DynamoDB table, and an Amazon API Gateway API. The SysOps administrator must delete the AWS CloudFormation stack without deleting the DynamoDB table.
Which action should the SysOps administrator take before deleting the AWS CloudFormation stack?

- A. Add a Retain deletion policy to the DynamoDB resource in the AWS CloudFormation stack
- B. Add a Snapshot deletion policy to the DynamoDB resource in the AWS CloudFormation stack.
- C. Enable termination protection on the AWS CloudFormation stack.
- D. Update the application's IAM policy with a Deny statement for the dynamodb:DeleteTable action.

Answer: A

NEW QUESTION 18

- (Exam Topic 1)

A company needs to view a list of security groups that are open to the internet on port 3389. What should a SysOps administrator do to meet this requirement?

- A. Configure Amazon GuardDuty to scan security groups and report unrestricted access on port 3389.
- B. Configure a service control policy (SCP) to identify security groups that allow unrestricted access on port 3389.
- C. Use AWS Identity and Access Management Access Analyzer to find any instances that have unrestricted access on port 3389.
- D. Use AWS Trusted Advisor to find security groups that allow unrestricted access on port 3389

Answer: D

NEW QUESTION 22

- (Exam Topic 1)

A company hosts a web application on an Amazon EC2 instance in a production VPC. Client connections to the application are failing. A SysOps administrator inspects the VPC flow logs and finds the following entry:
2 111122223333 eni-#### 192.0.2.15 203.0.113.56 40711 443 6 1 40 1418530010 1418530070 REJECT OK
What is a possible cause of these failed connections?

- A. A security group is denying traffic on port 443.
- B. The EC2 instance is shut down.
- C. The network ACL is blocking HTTPS traffic.
- D. The VPC has no internet gateway attached.

Answer: A

Explanation:

<https://docs.aws.amazon.com/vpc/latest/userguide/flow-logs-records-examples.html#flow-log-example-accepted>
<https://docs.aws.amazon.com/vpc/latest/userguide/flow-logs-records-examples.html#>
Accepted and rejected traffic: In this example, RDP traffic (destination port 3389, TCP protocol) to network interface eni-1235b8ca123456789 in account 123456789010 was rejected. 2 123456789010
eni-1235b8ca123456789 172.31.9.69 172.31.9.12 49761 3389 6 20 4249 1418530010 1418530070 REJECT OK

NEW QUESTION 24

- (Exam Topic 1)

A company's SysOps administrator deploys a public Network Load Balancer (NLB) in front of the company's web application. The web application does not use any Elastic IP addresses. Users must access the web application by using the company's domain name. The SysOps administrator needs to configure Amazon Route 53 to route traffic to the NLB.

Which solution will meet these requirements MOST cost-effectively?

- A. Create a Route 53 AAAA record for the NLB.
- B. Create a Route 53 alias record for the NLB.
- C. Create a Route 53 CAA record for the NLB.
- D. Create a Route 53 CNAME record for the NLB.

Answer: B

NEW QUESTION 29

- (Exam Topic 1)

A company has a stateful web application that is hosted on Amazon EC2 instances in an Auto Scaling group. The instances run behind an Application Load Balancer (ALB) that has a single target group. The ALB is configured as the origin in an Amazon CloudFront distribution. Users are reporting random logouts from the web application.

Which combination of actions should a SysOps administrator take to resolve this problem? (Select TWO.)

- A. Change to the least outstanding requests algorithm on the ALB target group.
- B. Configure cookie forwarding in the CloudFront distribution cache behavior.
- C. Configure header forwarding in the CloudFront distribution cache behavior.
- D. Enable group-level stickiness on the ALB listener rule.
- E. Enable sticky sessions on the ALB target group.

Answer: BE

Explanation:

<https://docs.aws.amazon.com/AmazonCloudFront/latest/DeveloperGuide/Cookies.html>

You can configure each cache behavior to do one of the following: Forward all cookies to your origin – CloudFront includes all cookies sent by the viewer when it forwards requests to the origin. <https://docs.aws.amazon.com/elasticloadbalancing/latest/application/sticky-sessions.html>

By default, an Application Load Balancer routes each request independently to a registered target based on the chosen load-balancing algorithm.

NEW QUESTION 33

- (Exam Topic 1)

An Amazon EC2 instance is running an application that uses Amazon Simple Queue Service (Amazon SQS) queues. A SysOps administrator must ensure that the application can read, write, and delete messages from the SQS queues.

Which solution will meet these requirements in the MOST secure manner?

- A. Create an IAM user with an IAM policy that allows the sqs SendMessage permission, the sqs ReceiveMessage permission, and the sqs DeleteMessage permission to the appropriate queues. Embed the IAM user's credentials in the application's configuration.
- B. Create an IAM user with an IAM policy that allows the sqs SendMessage permission, the sqs ReceiveMessage permission, and the sqs DeleteMessage permission to the appropriate queues. Export the IAM user's access key and secret access key as environment variables on the EC2 instance.
- C. Create and associate an IAM role that allows EC2 instances to call AWS services. Attach an IAM policy to the role that allows sqs.* permissions to the appropriate queues.
- D. Create and associate an IAM role that allows EC2 instances to call AWS services. Attach an IAM policy to the role that allows the sqs SendMessage permission, the sqs ReceiveMessage permission, and the sqs DeleteMessage permission to the appropriate queues.

Answer: D

NEW QUESTION 35

- (Exam Topic 1)

A SysOps administrator is reviewing VPC Flow Logs to troubleshoot connectivity issues in a VPC. While reviewing the logs, the SysOps administrator notices that rejected traffic is not listed.

What should the SysOps administrator do to ensure that all traffic is logged?

- A. Create a new flow log that has a filter setting to capture all traffic.
- B. Create a new flow log, set the log record format to a custom format, and select the proper fields to include in the log.
- C. Edit the existing flow log, change the filter setting to capture all traffic.
- D. Edit the existing flow log.
- E. Set the log record format to a custom format, select the proper fields to include in the log.

Answer: A

NEW QUESTION 37

- (Exam Topic 1)

A company uses an Amazon Elastic File System (Amazon EFS) file system to share files across many Linux Amazon EC2 instances. A SysOps administrator notices that the file system's PercentIOLimit metric is consistently at 100% for 15 minutes or longer. The SysOps administrator also notices that the application that reads and writes to that file system is performing poorly. The application requires high throughput and IOPS while accessing the file system.

What should the SysOps administrator do to remediate the consistently high PercentIOLimit metric?

- A. Create a new EFS file system that uses Max I/O performance mode.
- B. Use AWS DataSync to migrate data to the new EFS file system.
- C. Create an EFS lifecycle policy to transition future files to the Infrequent Access (IA) storage class to improve performance.
- D. Use AWS DataSync to migrate existing data to IA storage.
- E. Modify the existing EFS file system and activate Max I/O performance mode.
- F. Modify the existing EFS file system and activate Provisioned Throughput mode.

Answer: A

Explanation:

To support a wide variety of cloud storage workloads, Amazon EFS offers two performance modes, General Purpose mode and Max I/O mode. You choose a file

system's performance mode when you create it, and it cannot be changed. If the PercentIOLimit percentage returned was at or near 100 percent for a significant amount of time during the test, your application should use the Max I/O performance mode. <https://docs.aws.amazon.com/efs/latest/ug/performance.html>

NEW QUESTION 41

- (Exam Topic 1)

A company wants to be alerted through email when IAM CreateUser API calls are made within its AWS account.

Which combination of actions should a SysOps administrator take to meet this requirement? (Choose two.)

- A. Create an Amazon EventBridge (Amazon CloudWatch Events) rule with AWS CloudTrail as the event source and IAM CreateUser as the specific API call for the event pattern.
- B. Create an Amazon EventBridge (Amazon CloudWatch Events) rule with Amazon CloudSearch as the event source and IAM CreateUser as the specific API call for the event pattern.
- C. Create an Amazon EventBridge (Amazon CloudWatch Events) rule with AWS IAM Access Analyzer as the event source and IAM CreateUser as the specific API call for the event pattern.
- D. Use an Amazon Simple Notification Service (Amazon SNS) topic as an event target with an email subscription.
- E. Use an Amazon Simple Email Service (Amazon SES) notification as an event target with an email subscription.

Answer: AD

Explanation:

<https://aws.amazon.com/blogs/security/how-to-receive-alerts-when-your-iam-configuration-changes/>

NEW QUESTION 44

- (Exam Topic 1)

A SysOps administrator creates two VPCs, VPC1 and VPC2, in a company's AWS account. The SysOps administrator deploys a Linux Amazon EC2 instance in VPC1 and deploys an Amazon RDS for MySQL DB instance in VPC2. The DB instance is deployed in a private subnet. An application that runs on the EC2 instance needs to connect to the database.

What should the SysOps administrator do to give the EC2 instance the ability to connect to the database?

- A. Enter the DB instance connection string into the VPC1 route table.
- B. Configure VPC peering between the two VPCs.
- C. Add the same IPv4 CIDR range for both VPCs.
- D. Connect to the DB instance by using the DB instance's public IP address.

Answer: B

Explanation:

VPC peering allows two VPCs to communicate with each other securely. By configuring VPC peering between the two VPCs, the SysOps administrator will be able to give the EC2 instance in VPC1 the ability to connect to the database in VPC2. Once the VPC peering is configured, the EC2 instance will be able to communicate with the database using the private IP address of the DB instance in the private subnet.

NEW QUESTION 45

- (Exam Topic 1)

A company maintains a large set of sensitive data in an Amazon S3 bucket. The company's security team asks a SysOps administrator to help verify that all current objects in the S3 bucket are encrypted.

What is the MOST operationally efficient solution that meets these requirements?

- A. Create a script that runs against the S3 bucket and outputs the status of each object.
- B. Create an S3 Inventory configuration on the S3 bucket. Include the appropriate status fields.
- C. Provide the security team with an IAM user that has read access to the S3 bucket.
- D. Use the AWS CLI to output a list of all objects in the S3 bucket.

Answer: D

NEW QUESTION 46

- (Exam Topic 1)

A team of On-call engineers frequently needs to connect to Amazon EC2 Instances in a private subnet to troubleshoot and run commands. The Instances use either the latest AWS-provided Windows Amazon Machine Images (AMIs) or Amazon Linux AMIs.

The team has an existing IAM role for authorization. A SysOps administrator must provide the team with access to the Instances by granting IAM permissions to this. Which solution will meet this requirement?

- A. Add a statement to the IAM role policy to allow the `ssm:StartSession` action on the instance.
- B. Instruct the team to use AWS Systems Manager Session Manager to connect to the Instances by using the assumed IAM role.
- C. Associate an Elastic IP address and a security group with each instance.
- D. Add the engineers' IP addresses to the security group inbound rule.
- E. Add a statement to the IAM role policy to allow the `ec2:AuthorizeSecurityGroupIngress` action so that the team can connect to the Instances.
- F. Create a bastion host with an EC2 Instance, and associate the bastion host with the VPC.
- G. Add a statement to the IAM role policy to allow the `ec2:CreateVpnConnection` action on the bastion host.
- H. Instruct the team to use the bastion host endpoint to connect to the instances.
- I. Use two listeners.
- J. Forward port 22 to a target group of Linux instance.
- K. Forward port 3389 to a target group of Windows Instance.
- L. Add a statement to the IAM role policy to allow the `ec2:CreateRoute` action so that the team can connect to the Instances.

Answer: A

NEW QUESTION 47

- (Exam Topic 1)

A company monitors its account activity using AWS CloudTrail. and is concerned that some log files are being tampered with after the logs have been delivered to the account's Amazon S3 bucket.

Moving forward, how can the SysOps administrator confirm that the log files have not been modified after being delivered to the S3 bucket?

- A. Stream the CloudTrail logs to Amazon CloudWatch Logs to store logs at a secondary location.
- B. Enable log file integrity validation and use digest files to verify the hash value of the log file.
- C. Replicate the S3 log bucket across regions, and encrypt log files with S3 managed keys.
- D. Enable S3 server access logging to track requests made to the log bucket for security audits.

Answer: B

Explanation:

When you enable log file integrity validation, CloudTrail creates a hash for every log file that it delivers. Every hour, CloudTrail also creates and delivers a file that references the log files for the last hour and contains a hash of each. This file is called a digest file. CloudTrail signs each digest file using the private key of a public and private key pair. After delivery, you can use the public key to validate the digest file. CloudTrail uses different key pairs for each AWS region
<https://docs.aws.amazon.com/awscloudtrail/latest/userguide/cloudtrail-log-file-validation-intro.html>

NEW QUESTION 51

- (Exam Topic 1)

A company hosts its website in the us-east-1 Region. The company is preparing to deploy its website into the eu-central-1 Region. Website visitors who are located in Europe should access the website that is hosted in eu-central-1. All other visitors access the website that is hosted in us-east-1. The company uses Amazon Route 53 to manage the website's DNS records.

Which routing policy should a SysOps administrator apply to the Route 53 record set to meet these requirements?

- A. Geolocation routing policy
- B. Geoproximity routing policy
- C. Latency routing policy
- D. Multivalue answer routing policy

Answer: A

Explanation:

geolocation "Geolocation routing lets you choose the resources that serve your traffic based on the geographic location of your users, meaning the location that DNS queries originate from. For example, you might want all queries from Europe to be routed to an ELB load balancer in the Frankfurt region."
Could be confused with geoproximity - "Geoproximity routing lets Amazon Route 53 route traffic to your resources based on the geographic location of your users and your resources. You can also optionally choose to route more traffic or less to a given resource by specifying a value, known as a bias. A bias expands or shrinks the size of the geographic region from which traffic is routed to a resource" the use case is not needed as per question.
<https://docs.aws.amazon.com/Route53/latest/DeveloperGuide/routing-policy.html>

NEW QUESTION 53

- (Exam Topic 1)

A company plans to migrate several of its high performance computing (MPC) virtual machines (VMs) to Amazon EC2 instances on AWS. A SysOps administrator must identify a placement group for this deployment. The strategy must minimize network latency and must maximize network throughput between the HPC VMs. Which strategy should the SysOps administrator choose to meet these requirements?

- A. Deploy the instances in a cluster placement group in one Availability Zone.
- B. Deploy the instances in a partition placement group in two Availability Zones
- C. Deploy the instances in a partition placement group in one Availability Zone
- D. Deploy the instances in a spread placement group in two Availably Zones

Answer: A

NEW QUESTION 58

- (Exam Topic 1)

A company is expanding its use of AWS services across its portfolios The company wants to provision AWS accounts for each team to ensure a separation of business processes for security compliance and billing Account creation and bootstrapping should be completed m a scalable and efficient way so new accounts are created with a defined baseline and governance guardrails in place A SysOps administrator needs to design a provisioning process that saves time and resources

Which action should be taken to meet these requirements?

- A. Automate using AWS Elastic Beanstalk to provision the AWS accounts set up infrastructure and integrate with AWS Organizations
- B. Create bootstrapping scripts in AWS OpsWorks and combine them with AWS CloudFormation templates to provision accounts and infrastructure
- C. Use AWS Config to provision accounts and deploy instances using AWS Service Catalog
- D. Use AWS Control Tower to create a template in Account Factory and use the template to provision new accounts

Answer: D

NEW QUESTION 60

- (Exam Topic 1)

An existing, deployed solution uses Amazon EC2 instances with Amazon EBS General Purpose SSD volumes, an Amazon RDS PostgreSQL database, an Amazon EFS file system, and static objects stored in an Amazon S3 bucket. The Security team now mandates that at-rest encryption be turned on immediately for all aspects of the application, without creating new resources and without any downtime.

To satisfy the requirements, which one of these services can the SysOps administrator enable at-rest encryption on?

- A. EBS General Purpose SSD volumes
- B. RDS PostgreSQL database
- C. Amazon EFS file systems
- D. S3 objects within a bucket

Answer: D

Explanation:

<https://docs.aws.amazon.com/AmazonS3/latest/userguide/UsingEncryption.html>

NEW QUESTION 65

- (Exam Topic 1)

A company needs to automatically monitor an AWS account for potential unauthorized AWS Management Console logins from multiple geographic locations. Which solution will meet this requirement?

- A. Configure Amazon Cognito to detect any compromised IAM credentials.
- B. Set up Amazon Inspector
- C. Scan and monitor resources for unauthorized logins.
- D. Set up AWS Config
- E. Add the iam-policy-blacklisted-check managed rule to the account.
- F. Configure Amazon GuardDuty to monitor the UnauthorizedAccess:IAMUser/ConsoleLoginSuccess finding.

Answer: D

NEW QUESTION 69

- (Exam Topic 1)

A company must migrate its applications to AWS. The company is using Chef recipes for configuration management. The company wants to continue to use the existing Chef recipes after the applications are migrated to AWS.

What is the MOST operationally efficient solution that meets these requirements?

- A. Use AWS CloudFormation to create an Amazon EC2 instance, install a Chef server, and add Chef recipes.
- B. Use AWS CloudFormation to create a stack and add layers for Chef recipes.
- C. Use AWS Elastic Beanstalk with the Docker platform to upload Chef recipes.
- D. Use AWS OpsWorks to create a stack and add layers with Chef recipes.

Answer: D

NEW QUESTION 70

- (Exam Topic 1)

A company is expanding globally and needs to back up data on Amazon Elastic Block Store (Amazon EBS) volumes to a different AWS Region. Most of the EBS volumes that store the data are encrypted, but some of the EBS volumes are unencrypted. The company needs the backup data from all the EBS volumes to be encrypted.

Which solution will meet these requirements with the LEAST management overhead?

- A. Configure a lifecycle policy in Amazon Data Lifecycle Manager (Amazon DLM) to create the EBS volume snapshots with cross-Region backups enabled.
- B. Encrypt the snapshot copies by using AWS Key Management Service (AWS KMS).
- C. Create a point-in-time snapshot of the EBS volume.
- D. When the snapshot status is COMPLETED, copy the snapshots to another Region and set the Encrypted parameter to False.
- E. Create a point-in-time snapshot of the EBS volume.
- F. Copy the snapshots to an Amazon S3 bucket that uses server-side encryption.
- G. Turn on S3 Cross-Region Replication on the S3 bucket.
- H. Schedule an AWS Lambda function with the Python runtime.
- I. Configure the Lambda function to create the EBS volume snapshots, encrypt the unencrypted snapshots, and copy the snapshots to another Region.

Answer: A

Explanation:

Encrypt the snapshot copies by using AWS Key Management Service (AWS KMS). This solution will allow the company to automatically create encrypted snapshots of the EBS volumes and copy them to different AWS Regions with minimal effort.

NEW QUESTION 73

- (Exam Topic 1)

A SysOps administrator needs to track the costs of data transfer between AWS Regions. The SysOps administrator must implement a solution to send alerts to an email distribution list when transfer costs reach 75% of a specific threshold.

What should the SysOps administrator do to meet these requirements?

- A. Create an AWS Cost and Usage Report.
- B. Analyze the results in Amazon Athena.
- C. Configure an alarm to publish a message to an Amazon Simple Notification Service (Amazon SNS) topic when costs reach 75% of the threshold.
- D. Subscribe the email distribution list to the topic.
- E. Create an Amazon CloudWatch billing alarm to detect when costs reach 75% of the threshold. Configure the alarm to publish a message to an Amazon Simple Notification Service (Amazon SNS) topic.
- F. Subscribe the email distribution list to the topic.
- G. Use AWS Budgets to create a cost budget for data transfer cost.
- H. Set an alert at 75% of the budgeted amount.
- I. Configure the budget to send a notification to the email distribution list when costs reach 75% of the threshold.
- J. Set up a VPC flow log.
- K. Set up a subscription filter to an AWS Lambda function to analyze data transfer. Configure the Lambda function to send a notification to the email distribution list when costs reach 75% of the threshold.

Answer: B

Explanation:

The reason is that it uses the Amazon CloudWatch billing alarm, which is a built-in service specifically designed to monitor and alert on cost usage of your AWS

account, which makes it a more suitable solution for this use case. The alarm can be configured to detect when costs reach 75% of the threshold and when it is triggered, it can publish a message to an Amazon Simple Notification Service (Amazon SNS) topic. The email distribution list can be subscribed to the topic, so that they will receive the alerts when costs reach 75% of the threshold.

AWS Budgets allows you to track and manage your costs, but it doesn't specifically focus on data transfer costs between regions, and it might not provide as much granularity as CloudWatch Alarms.

NEW QUESTION 74

- (Exam Topic 1)

A SysOps administrator must manage the security of an AWS account. Recently, an IAM user's access key was mistakenly uploaded to a public code repository. The SysOps administrator must identify anything that was changed by using this access key.

- A. Create an Amazon EventBridge (Amazon CloudWatch Events) rule to send all IAM events to an AWS Lambda function for analysis
- B. Query Amazon EC2 logs by using Amazon CloudWatch Logs Insights for all events related to the compromised access key within the suspected timeframe
- C. Search AWS CloudTrail event history for all events initiated with the compromised access key within the suspected timeframe
- D. Search VPC Flow Logs for all events initiated with the compromised access key within the suspected timeframe.

Answer: C

NEW QUESTION 79

- (Exam Topic 1)

A company recently purchased Savings Plans. The company wants to receive email notification when the company's utilization drops below 90% for a given day. Which solution will meet this requirement?

- A. Create an Amazon CloudWatch alarm to monitor the Savings Plan check in AWS Trusted Advisor. Configure an Amazon Simple Queue Service (Amazon SQS) queue for email notification when the utilization drops below 90% for a given day.
- B. Create an Amazon CloudWatch alarm to monitor the SavingsPlansUtilization metric under the AWS/SavingsPlans namespace in CloudWatch
- C. Configure an Amazon Simple Queue Service (Amazon SQS) queue for email notification when the utilization drops below 90% for a given day.
- D. Create a Savings Plans alert to monitor the daily utilization of the Savings Plan
- E. Configure an Amazon Simple Notification Service (Amazon SNS) topic for email notification when the utilization drops below 90% for a given day.
- F. Use AWS Budgets to create a Savings Plans budget to track the daily utilization of the Savings Plans. Configure an Amazon Simple Notification Service (Amazon SNS) topic for email notification when the utilization drops below 90% for a given day.

Answer: D

Explanation:

AWS Budgets can be used to create a Savings Plans budget and track the daily utilization of the company's Savings Plans. By creating a budget, it will trigger an action when the utilization drops below 90%, which in this case will be to send an email notification via an Amazon SNS topic. This will ensure that the company is notified when their Savings Plans utilization drops below 90%, allowing them to take action if necessary.

Reference: [1] <https://docs.aws.amazon.com/savingsplans/latest/userguide/sp-usingBudgets.html>

NEW QUESTION 84

- (Exam Topic 1)

A company runs its entire suite of applications on Amazon EC2 instances. The company plans to move the applications to containers and AWS Fargate. Within 6 months, the company plans to retire its EC2 instances and use only Fargate. The company has been able to estimate its future Fargate costs.

A SysOps administrator needs to choose a purchasing option to help the company minimize costs. The SysOps administrator must maximize any discounts that are available and must ensure that there are no unused reservations.

Which purchasing option will meet these requirements?

- A. Compute Savings Plans for 1 year with the No Upfront payment option
- B. Compute Savings Plans for 1 year with the Partial Upfront payment option
- C. EC2 Instance Savings Plans for 1 year with the All Upfront payment option
- D. EC2 Reserved Instances for 1 year with the Partial Upfront payment option

Answer: C

NEW QUESTION 86

- (Exam Topic 1)

A company is storing backups in an Amazon S3 bucket. The backups must not be deleted for at least 3 months after the backups are created.

What should a SysOps administrator do to meet this requirement?

- A. Configure an IAM policy that denies the s3:DeleteObject action for all users
- B. Three months after an object is written, remove the policy.
- C. Enable S3 Object Lock on a new S3 bucket in compliance mode
- D. Place all backups in the new S3 bucket with a retention period of 3 months.
- E. Enable S3 Versioning on the existing S3 bucket
- F. Configure S3 Lifecycle rules to protect the backups.
- G. Enable S3 Object Lock on a new S3 bucket in governance mode
- H. Place all backups in the new S3 bucket with a retention period of 3 months.

Answer: D

Explanation:

To meet the requirements of the workload, a SysOps administrator should enable S3 Object Lock on a new S3 bucket in governance mode and place all backups in the new S3 bucket with a retention period of 3 months.

This will ensure that the backups are not deleted for at least 3 months after they are created. The other solutions (configuring an IAM policy that denies the s3:DeleteObject action for all users, enabling S3 Object Lock on a new S3 bucket in compliance mode, or enabling S3 Versioning on the existing S3 bucket and configuring S3 Lifecycle rules to protect the backups) will not meet the requirements, as they do not provide a way to ensure that the backups are not deleted for at least 3 months after they are created.

NEW QUESTION 90

- (Exam Topic 1)

A SysOps administrator is investigating why a user has been unable to use RDP to connect over the internet from their home computer to a bastion server running on an Amazon EC2 Windows instance.

Which of the following are possible causes of this issue? (Choose two.)

- A. A network ACL associated with the bastion's subnet is blocking the network traffic.
- B. The instance does not have a private IP address.
- C. The route table associated with the bastion's subnet does not have a route to the internet gateway.
- D. The security group for the instance does not have an inbound rule on port 22.
- E. The security group for the instance does not have an outbound rule on port 3389.

Answer: AC

NEW QUESTION 94

- (Exam Topic 1)

A SysOps Administrator runs a web application that is using a microservices approach whereby different responsibilities of the application have been divided in a separate microservice running on a different Amazon EC2 instance. The administrator has been tasked with reconfiguring the infrastructure to support this approach.

How can the administrator accomplish this with the LEAST administrative overhead?

- A. Use Amazon CloudFront to log the URL and forward the request.
- B. Use Amazon CloudFront to rewrite the header based on the microservice and forward the request.
- C. Use an Application Load Balancer (ALB) and do path-based routing.
- D. Use a Network Load Balancer (NLB) and do path-based routing.

Answer: C

Explanation:

<https://aws.amazon.com/premiumsupport/knowledge-center/elb-achieve-path-based-routing-alb/>

NEW QUESTION 95

- (Exam Topic 1)

A company's SysOps administrator needs to change the AWS Support plan for one of the company's AWS accounts. The account has multi-factor authentication (MFA) activated, and the MFA device is lost.

What should the SysOps administrator do to sign in?

- A. Sign in as a root user by using email and phone verification
- B. Set up a new MFA device
- C. Change the root user password.
- D. Sign in as an IAM user with administrator permission
- E. Resynchronize the MFA token by using the IAM console.
- F. Sign in as an IAM user with administrator permission
- G. Reset the MFA device for the root user by adding a new device.
- H. Use the forgot-password process to verify the email address
- I. Set up a new password and MFA device.

Answer: A

NEW QUESTION 100

- (Exam Topic 1)

A SysOps administrator is designing a solution for an Amazon RDS for PostgreSQL DB instance. Database credentials must be stored and rotated monthly. The applications that connect to the DB instance send

write-intensive traffic with variable client connections that sometimes increase significantly in a short period of time.

Which solution should a SysOps administrator choose to meet these requirements?

- A. Configure AWS Key Management Service (AWS KMS) to automatically rotate the keys for the DB instance
- B. Use RDS Proxy to handle the increases in database connections.
- C. Configure AWS Key Management Service (AWS KMS) to automatically rotate the keys for the DB instance
- D. Use RDS read replicas to handle the increases in database connections.
- E. Configure AWS Secrets Manager to automatically rotate the credentials for the DB instance
- F. Use RDS Proxy to handle the increases in database connections.
- G. Configure AWS Secrets Manager to automatically rotate the credentials for the DB instance
- H. Use RDS read replicas to handle the increases in database connections.

Answer: A

NEW QUESTION 105

- (Exam Topic 1)

A company plans to launch a static website on its domain example.com and subdomain www.example.com using Amazon S3. How should the SysOps administrator meet this requirement?

- A. Create one S3 bucket named example.com for both the domain and subdomain.
- B. Create one S3 bucket with a wildcard named *.example.com for both the domain and subdomain.
- C. Create two S3 buckets named example.com and www.example.com
- D. Configure the subdomain bucket to redirect requests to the domain bucket.
- E. Create two S3 buckets named http://example.com and http://www.example.com
- F. Configure the wildcard (*) bucket to redirect requests to the domain bucket.

Answer: C

NEW QUESTION 109

- (Exam Topic 1)

A company's SysOps administrator regularly checks the AWS Personal Health Dashboard in each of the company's accounts. The accounts are part of an organization in AWS Organizations. The company recently added 10 more accounts to the organization. The SysOps administrator must consolidate the alerts from each account's Personal Health Dashboard.

Which solution will meet this requirement with the LEAST amount of effort?

- A. Enable organizational view in AWS Health.
- B. Configure the Personal Health Dashboard in each account to forward events to a central AWS CloudTrail log.
- C. Create an AWS Lambda function to query the AWS Health API and to write all events to an Amazon DynamoDB table.
- D. Use the AWS Health API to write events to an Amazon DynamoDB table.

Answer: A

Explanation:

Enabling the organizational view in AWS Health will allow the SysOps administrator to consolidate the alerts from each account's Personal Health Dashboard. It will also provide the administrator with a single view of all the accounts in the organization, allowing them to easily monitor the health of all the accounts in the organization.

Reference:

[1] <https://aws.amazon.com/premiumsupport/knowledge-center/organizational-view-health-dashboard/>

NEW QUESTION 111

- (Exam Topic 1)

A company uses Amazon S3 to aggregate raw video footage from various media teams across the US. The company recently expanded into new geographies in Europe and Australia. The technical teams located in Europe and Australia reported delays when uploading large video tiles into the destination S3 bucket in the United States.

What are the MOST cost-effective ways to increase upload speeds into the S3 bucket? (Select TWO.)

- A. Create multiple AWS Direct Connect connections between AWS and branch offices in Europe and Australia for file uploads into the destination S3 bucket.
- B. Create multiple AWS Site-to-Site VPN connections between AWS and branch offices in Europe and Australia for file uploads into the destination S3 bucket.
- C. Use Amazon S3 Transfer Acceleration for file uploads into the destination S3 bucket.
- D. Use AWS Global Accelerator for file uploads into the destination S3 bucket from the branch offices in Europe and Australia.
- E. Use multipart uploads for file uploads into the destination S3 bucket from the branch offices in Europe and Australia.

Answer: CE

NEW QUESTION 116

- (Exam Topic 1)

A SysOps administrator is maintaining a web application using an Amazon CloudFront web distribution, an Application Load Balancer (ALB), Amazon RDS, and Amazon EC2 in a VPC. All services have logging enabled. The administrator needs to investigate HTTP Layer 7 status codes from the web application.

Which log sources contain the status codes? (Choose two.)

- A. VPC Flow Logs
- B. AWS CloudTrail logs
- C. ALB access logs
- D. CloudFront access logs
- E. RDS logs

Answer: CD

Explanation:

"C" because Elastic Load Balancing provides access logs that capture detailed information about requests sent to your load balancer

<https://docs.aws.amazon.com/elasticloadbalancing/latest/application/load-balancer-access-logs.html>

"D" because "you can configure CloudFront to create log files that contain detailed information about every user request that CloudFront receives"

<https://docs.aws.amazon.com/AmazonCloudFront/latest/DeveloperGuide/AccessLogs.html>

NEW QUESTION 119

- (Exam Topic 1)

A company plans to deploy a database on an Amazon Aurora MySQL DB cluster. The database will store data for a demonstration environment. The data must be reset on a daily basis.

What is the MOST operationally efficient solution that meets these requirements?

- A. Create a manual snapshot of the DB cluster after the data has been populated
- B. Create an Amazon EventBridge (Amazon CloudWatch Events) rule to invoke an AWS Lambda function on a daily basis
- C. Configure the function to restore the snapshot and then delete the previous DB cluster.
- D. Enable the Backtrack feature during the creation of the DB cluster
- E. Specify a target backtrack window of 48 hours
- F. Create an Amazon EventBridge (Amazon CloudWatch Events) rule to invoke an AWS Lambda function on a daily basis
- G. Configure the function to perform a backtrack operation.
- H. Export a manual snapshot of the DB cluster to an Amazon S3 bucket after the data has been populated. Create an Amazon EventBridge (Amazon CloudWatch Events) rule to invoke an AWS Lambda function on a daily basis
- I. Configure the function to restore the snapshot from Amazon S3.
- J. Set the DB cluster backup retention period to 2 days
- K. Create an Amazon EventBridge (Amazon CloudWatch Events) rule to invoke an AWS Lambda function on a daily basis
- L. Configure the function to restore the DB cluster to a point in time and then delete the previous DB cluster.

Answer: D

Explanation:

Create an Amazon EventBridge (Amazon CloudWatch Events) rule to invoke an AWS Lambda function on a daily basis. Configure the function to restore the DB cluster to a point in time and then delete the previous DB cluster. This is the most operationally efficient solution that meets the requirements, as it will allow the company to reset the database on a daily basis without having to manually take and restore snapshots. The other solutions (creating a manual snapshot of the DB cluster, enabling the Backtrack feature, or exporting a manual snapshot of the DB cluster to Amazon S3) will require additional steps and resources to reset the database on a daily basis.

NEW QUESTION 124

- (Exam Topic 1)

A company has an application that customers use to search for records on a website. The application's data is stored in an Amazon Aurora DB cluster. The application's usage varies by season and by day of the week.

The website's popularity is increasing, and the website is experiencing slower performance because of increased load on the DB cluster during periods of peak activity. The application logs show that the performance issues occur when users are searching for information. The same search is rarely performed multiple times.

A SysOps administrator must improve the performance of the platform by using a solution that maximizes resource efficiency. Which solution will meet these requirements?

- A. Deploy an Amazon ElastiCache for Redis cluster in front of the DB cluster
- B. Modify the application to check the cache before the application issues new queries to the database
- C. Add the results of any queries to the cache.
- D. Deploy an Aurora Replica for the DB cluster
- E. Modify the application to use the reader endpoint for search operation
- F. Use Aurora Auto Scaling to scale the number of replicas based on load
- G. Most Voted
- H. Use Provisioned IOPS on the storage volumes that support the DB cluster to improve performance sufficiently to support the peak load on the application.
- I. Increase the instance size in the DB cluster to a size that is sufficient to support the peak load on the application
- J. Use Aurora Auto Scaling to scale the instance size based on load.

Answer: B

Explanation:

https://docs.amazonaws.cn/en_us/AmazonRDS/latest/AuroraUserGuide/aurora-replicas-adding.html

NEW QUESTION 125

- (Exam Topic 1)

A company has mandated the use of multi-factor authentication (MFA) for all IAM users, and requires users to make all API calls using the CLI. However, users are not prompted to enter MFA tokens, and are able to run CLI commands without MFA. In an attempt to enforce MFA, the company attached an IAM policy to all users that denies API calls that have not been authenticated with MFA.

What additional step must be taken to ensure that API calls are authenticated using MFA?

- A. Enable MFA on IAM roles, and require IAM users to use role credentials to sign API calls.
- B. Ask the IAM users to log into the AWS Management Console with MFA before making API calls using the CLI.
- C. Restrict the IAM users to use of the console, as MFA is not supported for CLI use.
- D. Require users to use temporary credentials from the get-session-token command to sign API calls.

Answer: D

NEW QUESTION 130

- (Exam Topic 1)

An ecommerce company uses an Amazon ElastiCache for Memcached cluster for in-memory caching of popular product queries on the shopping site. When viewing recent Amazon CloudWatch metrics data for the ElastiCache cluster, the SysOps administrator notices a large number of evictions.

Which of the following actions will reduce these evictions? (Choose two.)

- A. Add an additional node to the ElastiCache cluster.
- B. Increase the ElastiCache time to live (TTL).
- C. Increase the individual node size inside the ElastiCache cluster.
- D. Put an Elastic Load Balancer in front of the ElastiCache cluster.
- E. Use Amazon Simple Queue Service (Amazon SQS) to decouple the ElastiCache cluster.

Answer: AC

Explanation:

<https://d1.awsstatic.com/training-and-certification/docs-sysops-associate/AWS-Certified-SysOps-Administrator>

NEW QUESTION 134

- (Exam Topic 1)

A company is managing multiple AWS accounts in AWS Organizations. The company is reviewing internal security of its AWS environment. The company's security administrator has their own AWS account and wants to review the VPC configuration of developer AWS accounts.

Which solution will meet these requirements in the MOST secure manner?

- A. Create an IAM policy in each developer account that has read-only access related to VPC resources. Assign the policy to an IAM user
- B. Share the user credentials with the security administrator.
- C. Create an IAM policy in each developer account that has administrator access to all Amazon EC2 actions, including VPC actions
- D. Assign the policy to an IAM user
- E. Share the user credentials with the security administrator.
- F. Create an IAM policy in each developer account that has administrator access related to VPC resources. Assign the policy to a cross-account IAM role
- G. Ask the security administrator to assume the role from their account.

H. Create an IAM policy in each developer account that has read-only access related to VPC resources Assign the policy to a cross-account IAM role Ask the security administrator to assume the role from their account.

Answer: D

NEW QUESTION 139

- (Exam Topic 1)

A user working in the Amazon EC2 console increased the size of an Amazon Elastic Block Store (Amazon EBS) volume attached to an Amazon EC2 Windows instance. The change is not reflected in the file system.
What should a SysOps administrator do to resolve this issue?

- A. Extend the file system with operating system-level tools to use the new storage capacity.
- B. Reattach the EBS volume to the EC2 instance.
- C. Reboot the EC2 instance that is attached to the EBS volume.
- D. Take a snapshot of the EBS volum
- E. Replace the original volume with a volume that is created from the snapshot.

Answer: B

NEW QUESTION 140

- (Exam Topic 1)

A company recently acquired another corporation and all of that corporation's AWS accounts. A financial analyst needs the cost data from these accounts. A SysOps administrator uses Cost Explorer to generate cost and usage reports. The SysOps administrator notices that "No Tagkey" represents 20% of the monthly cost.
What should the SysOps administrator do to tag the "No Tagkey" resources?

- A. Add the accounts to AWS Organization
- B. Use a service control policy (SCP) to tag all the untagged resources.
- C. Use an AWS Config rule to find the untagged resource
- D. Set the remediation action to terminate the resources.
- E. Use Cost Explorer to find and tag all the untagged resources.
- F. Use Tag Editor to find and tag all the untagged resources.

Answer: D

Explanation:

"You can add tags to resources when you create the resource. You can use the resource's service console or API to add, change, or remove those tags one resource at a time. To add tags to—or edit or delete tags of—multiple resources at once, use Tag Editor. With Tag Editor, you search for the resources that you want to tag, and then manage tags for the resources in your search results." <https://docs.aws.amazon.com/ARG/latest/userguide/tag-editor.html>

NEW QUESTION 145

- (Exam Topic 1)

A large company is using AWS Organizations to manage its multi-account AWS environment. According to company policy, all users should have read-level access to a particular Amazon S3 bucket in a central account. The S3 bucket data should not be available outside the organization. A SysOps administrator must set up the permissions and add a bucket policy to the S3 bucket.
Which parameters should be specified to accomplish this in the MOST efficient manner?

- A. Specify "" as the principal and PrincipalOrgId as a condition.
- B. Specify all account numbers as the principal.
- C. Specify PrincipalOrgId as the principal.
- D. Specify the organization's management account as the principal.

Answer: A

Explanation:

<https://aws.amazon.com/blogs/security/control-access-to-aws-resources-by-using-the-aws-organization-of-iam-p>

NEW QUESTION 149

- (Exam Topic 1)

A SysOps administrator is troubleshooting an AWS CloudFormation template whereby multiple Amazon EC2 instances are being created The template is working in us-east-1, but it is failing in us-west-2 with the error code:

```
AMI [ami-12345678] does not exist
```

How should the administrator ensure that the AWS CloudFormation template is working in every region?

- A. Copy the source region's Amazon Machine Image (AMI) to the destination region and assign it the same ID.
- B. Edit the AWS CloudFormation template to specify the region code as part of the fully qualified AMI ID.
- C. Edit the AWS CloudFormation template to offer a drop-down list of all AMIs to the user by using the `aws :: EC2 :: ami :: imageID` control.
- D. Modify the AWS CloudFormation template by including the AMI IDs in the "Mappings" section
- E. Refer to the proper mapping within the template for the proper AMI ID.

Answer: A

NEW QUESTION 152

- (Exam Topic 1)

A SysOps administrator is responsible for a legacy, CPU-heavy application The application can only be scaled vertically Currently, the application is deployed on a

single t2 large Amazon EC2 instance The system is showing 90% CPU usage and significant performance latency after a few minutes
What change should be made to alleviate the performance problem?

- A. Change the Amazon EBS volume to Provisioned IOPs
- B. Upgrade to a compute-optimized instance
- C. Add additional 12 large instances to the application
- D. Purchase Reserved Instances

Answer: B

NEW QUESTION 156

- (Exam Topic 1)

A company is using an Amazon Aurora MySQL DB cluster that has point-in-time recovery, backtracking, and automatic backup enabled. A SysOps administrator needs to be able to roll back the DB cluster to a specific recovery point within the previous 72 hours. Restores must be completed in the same production DB cluster.

Which solution will meet these requirements?

- A. Create an Aurora Replic
- B. Promote the replica to replace the primary DB instance.
- C. Create an AWS Lambda function to restore an automatic backup to the existing DB cluster.
- D. Use backtracking to rewind the existing DB cluster to the desired recovery point.
- E. Use point-in-time recovery to restore the existing DB cluster to the desired recovery point.

Answer: C

Explanation:

"The limit for a backtrack window is 72 hours.....Backtracking is only available for DB clusters that were created with the Backtrack feature enabled....Backtracking "rewinds" the DB cluster to the time you specify. Backtracking is not a replacement for backing up your DB cluster so that you can restore it to a point in time....You can backtrack a DB cluster quickly. Restoring a DB cluster to a point in time launches a new DB cluster and restores it from backup data or a DB cluster snapshot, which can take hours."

<https://docs.aws.amazon.com/AmazonRDS/latest/AuroraUserGuide/AuroraMySQL.Managing.Backtrack.html>

NEW QUESTION 161

- (Exam Topic 1)

A company has an AWS Cloud Formation template that creates an Amazon S3 bucket. A user authenticates to the corporate AWS account with their Active Directory credentials and attempts to deploy the Cloud Formation template. However, the stack creation fails.

Which factors could cause this failure? (Select TWO.)

- A. The user's IAM policy does not allow the cloudformation:CreateStack action.
- B. The user's IAM policy does not allow the cloudformation:CreateStackSet action.
- C. The user's IAM policy does not allow the s3:CreateBucket action.
- D. The user's IAM policy explicitly denies the s3:ListBucket action.
- E. The user's IAM policy explicitly denies the s3:PutObject action

Answer: AC

NEW QUESTION 163

- (Exam Topic 1)

A SysOps administrator is tasked with analyzing database performance. The database runs on a single Amazon RDS D6 instance. The SysOps administrator finds that, during times of peak traffic, resources on the database are over utilized due to the amount of read traffic.

Which actions should the SysOps administrator take to improve RDS performance? (Select TWO.)

- A. Add a read replica.
- B. Modify the application to use Amazon ElastiCache for Memcached.
- C. Migrate the database from RDS to Amazon DynamoDB.
- D. Migrate the database to Amazon EC2 with enhanced networking enabled
- E. Upgrade the database to a Multi-AZ deployment.

Answer: AB

NEW QUESTION 165

- (Exam Topic 1)

A company uses an AWS CloudFormation template to provision an Amazon EC2 instance and an Amazon RDS DB instance A SysOps administrator must update the template to ensure that the DB instance is created before the EC2 instance is launched

What should the SysOps administrator do to meet this requirement?

- A. Add a wait condition to the template Update the EC2 instance user data script to send a signal after the EC2 instance is started
- B. Add the DependsOn attribute to the EC2 instance resource, and provide the logical name of the RDS resource
- C. Change the order of the resources in the template so that the RDS resource is listed before the EC2 instance resource
- D. Create multiple templates Use AWS CloudFormation StackSets to wait for one stack to complete before the second stack is created

Answer: B

Explanation:

<https://docs.aws.amazon.com/AWSCloudFormation/latest/UserGuide/aws-attribute-dependson.html> Syntax The DependsOn attribute can take a single string or list of strings. "DependsOn" : [String, ...]

Example The following template contains an AWS::EC2::Instance resource with a DependsOn attribute that specifies myDB, an AWS::RDS::DBInstance. When CloudFormation creates this stack, it first creates myDB, then creates Ec2Instance.

NEW QUESTION 166

- (Exam Topic 1)

A SysOps administrator is setting up an automated process to recover an Amazon EC2 instance in the event of an underlying hardware failure. The recovered instance must have the same private IP address and the same Elastic IP address that the original instance had. The SysOps team must receive an email notification when the recovery process is initiated.

Which solution will meet these requirements?

- A. Create an Amazon CloudWatch alarm for the EC2 instance, and specify the `StatusCheckFailedInstance` metric.
- B. Add an EC2 action to the alarm to recover the instance.
- C. Add an alarm notification to publish a message to an Amazon Simple Notification Service (Amazon SNS) topic.
- D. Subscribe the SysOps team email address to the SNS topic.
- E. Create an Amazon CloudWatch alarm for the EC2 instance, and specify the `StatusCheckFailed_System` metric.
- F. Add an EC2 action to the alarm to recover the instance.
- G. Add an alarm notification to publish a message to an Amazon Simple Notification Service (Amazon SNS) topic.
- H. Subscribe the SysOps team email address to the SNS topic.
- I. Create an Auto Scaling group across three different subnets in the same Availability Zone with a minimum, maximum, and desired size of 1. Configure the Auto Scaling group to use a launch template that specifies the private IP address and the Elastic IP address.
- J. Add an activity notification for the Auto Scaling group to send an email message to the SysOps team through Amazon Simple Email Service (Amazon SES).
- K. Create an Auto Scaling group across three Availability Zones with a minimum, maximum, and desired size of 1. Configure the Auto Scaling group to use a launch template that specifies the private IP address and the Elastic IP address.
- L. Add an activity notification for the Auto Scaling group to publish a message to an Amazon Simple Notification Service (Amazon SNS) topic.
- M. Subscribe the SysOps team email address to the SNS topic.

Answer: B

Explanation:

You can create an Amazon CloudWatch alarm that monitors an Amazon EC2 instance and automatically recovers the instance if it becomes impaired due to an underlying hardware failure or a problem that requires AWS involvement to repair. Terminated instances cannot be recovered. A recovered instance is identical to the original instance, including the instance ID, private IP addresses, Elastic IP addresses, and all instance metadata. If the impaired instance has a public IPv4 address, the instance retains the public IPv4 address after recovery. If the impaired instance is in a placement group, the recovered instance runs in the placement group. When the `StatusCheckFailed_System` alarm is triggered, and the recover action is initiated, you will be notified by the Amazon SNS topic that you selected when you created the alarm and associated the recover action. <https://docs.aws.amazon.com/AWSEC2/latest/UserGuide/ec2-instance-recover.html>

NEW QUESTION 171

- (Exam Topic 1)

A SysOps administrator is troubleshooting connection timeouts to an Amazon EC2 instance that has a public IP address. The instance has a private IP address of 172.31.16.139. When the SysOps administrator tries to ping the instance's public IP address from the remote IP address 203.0.113.12, the response is "request timed out." The flow logs contain the following information:

```
2 123456789010 eni-1235b8ca123456789 203.0.113.12 172.31.16.139 0 0 1 4 336 1432917027 1432917142 ACCEPT OK
2 123456789010 eni-1235b8ca123456789 172.31.16.139 203.0.113.12 0 0 1 4 336 1432917094 1432917142 REJECT OK
```

What is one cause of the problem?

- A. Inbound security group deny rule
- B. Outbound security group deny rule
- C. Network ACL inbound rules
- D. Network ACL outbound rules

Answer: D

NEW QUESTION 176

- (Exam Topic 1)

A company uses an Amazon S3 bucket to store data files. The S3 bucket contains hundreds of objects. The company needs to replace a tag on all the objects in the S3 bucket with another tag.

What is the MOST operationally efficient way to meet this requirement?

- A. Use S3 Batch Operation.
- B. Specify the operation to replace all object tags.
- C. Use the AWS CLI to get the tags for each object.
- D. Save the tags in a list.
- E. Use S3 Batch Operations. Specify the operation to delete all object tags.
- F. Use the AWS CLI and the list to retag the objects.
- G. Use the AWS CLI to get the tags for each object.
- H. Save the tags in a list.
- I. Use the AWS CLI and the list to remove the object tags.
- J. Use the AWS CLI and the list to retag the objects.
- K. Use the AWS CLI to copy the objects to another S3 bucket.
- L. Add the new tag to the copied objects. Delete the original objects.

Answer: A

Explanation:

Ref. <https://aws.amazon.com/es/blogs/storage/adding-and-removing-object-tags-with-s3-batch-operations/>

NEW QUESTION 181

- (Exam Topic 1)

A company recently migrated its server infrastructure to Amazon EC2 instances. The company wants to use Amazon CloudWatch metrics to track instance memory utilization and available disk space.

What should a SysOps administrator do to meet these requirements?

- A. Configure CloudWatch from the AWS Management Console for all the instances that require monitoring by CloudWatch.
- B. AWS automatically installs and configures the agents for the specified instances.
- C. Install and configure the CloudWatch agent on all the instances.
- D. Attach an IAM role to allow the instances to write logs to CloudWatch.
- E. Install and configure the CloudWatch agent on all the instances.
- F. Attach an IAM user to allow the instances to write logs to CloudWatch.
- G. Install and configure the CloudWatch agent on all the instances.
- H. Attach the necessary security groups to allow the instances to write logs to CloudWatch.

Answer: C

NEW QUESTION 185

- (Exam Topic 1)

A company needs to implement a managed file system to host Windows file shares for users on premises. Resources in the AWS Cloud also need access to the data on these file shares. A SysOps administrator needs to present the user file shares on premises and make the user file shares available on AWS with minimum latency.

What should the SysOps administrator do to meet these requirements?

- A. Set up an Amazon S3 File Gateway.
- B. Set up an AWS Direct Connect connection.
- C. Use AWS DataSync to automate data transfers between the existing file servers and AWS.
- D. Set up an Amazon FSx File Gateway.

Answer: D

Explanation:

Amazon FSx provides a fully managed file system that is optimized for Windows-based workloads and can be used to create file shares that can be accessed both on premises and in the AWS Cloud. The file shares that are created in Amazon FSx are highly available and can be accessed with low latency. Additionally, Amazon FSx supports Windows-based authentication, making it easy to integrate with existing Windows user accounts.

References:

[1] <https://aws.amazon.com/fsx/>

[2] <https://aws.amazon.com/storage/file-storage/>

[3] <https://docs.aws.amazon.com/fsx/latest/>

NEW QUESTION 190

- (Exam Topic 1)

A SysOps administrator needs to create alerts that are based on the read and write metrics of Amazon Elastic Block Store (Amazon EBS) volumes that are attached to an Amazon EC2 instance. The SysOps administrator creates and enables Amazon CloudWatch alarms for the DiskReadBytes metric and the DiskWriteBytes metric.

A custom monitoring tool that is installed on the EC2 instance with the same alarm configuration indicates that the volume metrics have exceeded the threshold. However, the CloudWatch alarms were not in ALARM state.

Which action will ensure that the CloudWatch alarms function correctly?

- A. Install and configure the CloudWatch agent on the EC2 instance to capture the desired metrics.
- B. Install and configure AWS Systems Manager Agent on the EC2 instance to capture the desired metrics.
- C. Reconfigure the CloudWatch alarms to use the VolumeReadBytes metric and the VolumeWriteBytes metric for the EBS volumes.
- D. Reconfigure the CloudWatch alarms to use the VolumeReadBytes metric and the VolumeWriteBytes metric for the EC2 instance.

Answer: A

NEW QUESTION 192

- (Exam Topic 1)

A company has an existing web application that runs on two Amazon EC2 instances behind an Application Load Balancer (ALB) across two Availability Zones. The application uses an Amazon RDS Multi-AZ DB Instance. Amazon Route 53 record sets route requests for dynamic content to the load balancer and requests for static content to an Amazon S3 bucket. Site visitors are reporting extremely long loading times.

Which actions should be taken to improve the performance of the website? (Select TWO.)

- A. Add Amazon CloudFront caching for static content.
- B. Change the load balancer listener from HTTPS to TCP.
- C. Enable Amazon Route 53 latency-based routing.
- D. Implement Amazon EC2 Auto Scaling for the web servers.
- E. Move the static content from Amazon S3 to the web servers.

Answer: AD

NEW QUESTION 196

- (Exam Topic 1)

A company has two VPC networks named VPC A and VPC B. The VPC A CIDR block is 10.0.0.0/16 and the VPC B CIDR block is 172.31.0.0/16. The company wants to establish a VPC peering connection named pcx-12345 between both VPCs.

Which rules should appear in the route table of VPC A after configuration? (Select TWO.)

- A. Destination: 10.0.0.0/16, Target: Local
- B. Destination: 172.31.0.0/16, Target: Local
- C. Destination: 10.0.0.0/16, Target: pcx-12345
- D. Destination: 172.31.0.0/16, Target: pcx-12345
- E. Destination: 10.0.0.0/16, Target: 172.31.0.0/16

Answer: AD

Explanation:

<https://docs.aws.amazon.com/vpc/latest/peering/vpc-peering-routing.html>

NEW QUESTION 198

- (Exam Topic 1)

A SysOps administrator needs to develop a solution that provides email notification and inserts a record into a database every time a file is put into an Amazon S3 bucket.

What is the MOST operationally efficient solution that meets these requirements?

- A. Set up an S3 event notification that targets an Amazon Simple Notification Service (Amazon SNS) topic Create two subscriptions for the SNS topic Use one subscription to send the email notification Use the other subscription to invoke an AWS Lambda function that inserts the record into the database
- B. Set up an Amazon CloudWatch alarm that enters ALARM state whenever an object is created in the S3 bucket Configure the alarm to invoke an AWS Lambda (unction that sends the email notification and inserts the record into the database
- C. Create an AWS Lambda function to send the email notification and insert the record into the database whenever a new object is detected in the S3 bucket invoke the function every minute with an Amazon EventBridge (Amazon CloudWatch Events) scheduled rule.
- D. Set up two S3 event notifications Target a separate AWS Lambda function with each notification Configure one function to send the email notification Configure the other function to insert the record into the database

Answer: C

NEW QUESTION 200

- (Exam Topic 1)

A company runs a stateless application that is hosted on an Amazon EC2 instance. Users are reporting performance issues. A SysOps administrator reviews the Amazon CloudWatch metrics for the application and notices that the instance's CPU utilization frequently reaches 90% during business hours.

What is the MOST operationally efficient solution that will improve the application's responsiveness?

- A. Configure CloudWatch logging on the EC2 instanc
- B. Configure a CloudWatch alarm for CPU utilization to alert the SysOps administrator when CPU utilization goes above 90%.
- C. Configure an AWS Client VPN connection to allow the application users to connect directly to the EC2 instance private IP address to reduce latency.
- D. Create an Auto Scaling group, and assign it to an Application Load Balance
- E. Configure a target tracking scaling policy that is based on the average CPU utilization of the Auto Scaling group.
- F. Create a CloudWatch alarm that activates when the EC2 instance's CPU utilization goes above 80%.Configure the alarm to invoke an AWS Lambda function that vertically scales the instance.

Answer: C

NEW QUESTION 203

- (Exam Topic 1)

A company is partnering with an external vendor to provide data processing services. For this integration, the vendor must host the company's data in an Amazon S3 bucket in the vendor's AWS account. The vendor is allowing the company to provide an AWS Key Management Service (AWS KMS) key to encrypt the company's data. The vendor has provided an IAM role Amazon Resource Name (ARN) to the company for this integration.

What should a SysOps administrator do to configure this integration?

- A. Create a new KMS ke
- B. Add the vendor's IAM role ARN to the KMS key polic
- C. Provide the new KMS key ARN to the vendor.
- D. Create a new KMS ke
- E. Create a new IAM use
- F. Add the vendor's IAM role ARN to an inline policy that is attached to the IAM use
- G. Provide the new IAM user ARN to the vendor.
- H. Configure encryption using the KMS managed S3 ke
- I. Add the vendor's IAM role ARN to the KMS managed S3 key polic
- J. Provide the KMS managed S3 key ARN to the vendor.
- K. Configure encryption using the KMS managed S3 ke
- L. Create an S3 bucke
- M. Add the vendor's IAM role ARN to the S3 bucket polic
- N. Provide the S3 bucket ARN to the vendor.

Answer: C

NEW QUESTION 205

- (Exam Topic 1)

A company has created a NAT gateway in a public subnet in a VPC. The VPC also contains a private subnet that includes Amazon EC2 instances. The EC2 instances use the NAT gateway to access the internet to download patches and updates. The company has configured a VPC flow log for the elastic network interface of the NAT gateway. The company is publishing the output to Amazon CloudWatch Logs.

A SysOps administrator must identify the top five internet destinations that the EC2 instances in the private subnet communicate with for downloads.

What should the SysOps administrator do to meet this requirement in the MOST operationally efficient way?

- A. Use AWS CloudTrail Insights events to identify the top five internet destinations.
- B. Use Amazon CloudFront standard logs (access logs) to identify the top five internet destinations.
- C. Use CloudWatch Logs Insights to identify the top five internet destinations.
- D. Change the flow log to publish logs to Amazon S3. Use Amazon Athena to query the log files in Amazon S3.

Answer: C

NEW QUESTION 209

- (Exam Topic 1)

A company is rolling out a new version of its website. Management wants to deploy the new website in a limited rollout to 20% of the company's customers. The company uses Amazon Route 53 for its website's DNS solution.

Which configuration will meet these requirements?

- A. Create a failover routing policy
- B. Within the policy, configure 80% of the website traffic to be sent to the original resource
- C. Configure the remaining 20% of traffic as the failover record that points to the new resource.
- D. Create a multivalue answer routing policy
- E. Within the policy, create 4 records with the name and IP address of the original resource
- F. Configure 1 record with the name and IP address of the new resource.
- G. Create a latency-based routing policy
- H. Within the policy, configure a record pointing to the original resource with a weight of 80. Configure a record pointing to the new resource with a weight of 20.
- I. Create a weighted routing policy
- J. Within the policy, configure a weight of 80 for the record pointing to the original resource
- K. Configure a weight of 20 for the record pointing to the new resource.

Answer: C

NEW QUESTION 211

- (Exam Topic 1)

A SysOps administrator has used AWS CloudFormation to deploy a serenity application into a production VPC. The application consists of an AWS Lambda function, an Amazon DynamoDB table, and an Amazon API Gateway API. The SysOps administrator must delete the AWS CloudFormation stack without deleting the DynamoDB table.

Which action should the SysOps administrator take before deleting the AWS CloudFormation stack?

- A. Add a Retain deletion policy to the DynamoDB resource in the AWS CloudFormation stack.
- B. Add a Snapshot deletion policy to the DynamoDB resource in the AWS CloudFormation stack.
- C. Enable termination protection on the AWS CloudFormation stack.
- D. Update the application's IAM policy with a Deny statement for the dynamodb:DeleteTable action.

Answer: A

NEW QUESTION 216

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

AWS-SysOps Practice Exam Features:

- * AWS-SysOps Questions and Answers Updated Frequently
- * AWS-SysOps Practice Questions Verified by Expert Senior Certified Staff
- * AWS-SysOps Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * AWS-SysOps Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The AWS-SysOps Practice Test Here](#)